

siteco



• **Highest level of efficiency**

Fast pay-back thanks to low procurement costs and luminous efficacy of 130 lm / W

• **Quick and easy installation**

Thanks to a preinstalled 2 m connection cable and mounting-bracket system

• **Maximum flexibility**

Thanks to various sizes, installation options and multi-lumen function directly on the luminaire

• **Precise, homogeneous surface illumination**

Thanks to asymmetrical deep-beam light distribution PL32, standard-compliant light into every corner – and with greater uniformity than comparative solutions

• **Stylish and high-quality design**



Thanks to an in-house design concept with aluminum housing and optic cover made of safety glass

Floodlight FL 41

The best of its class.

Floodlight FL 41

The best of its class.

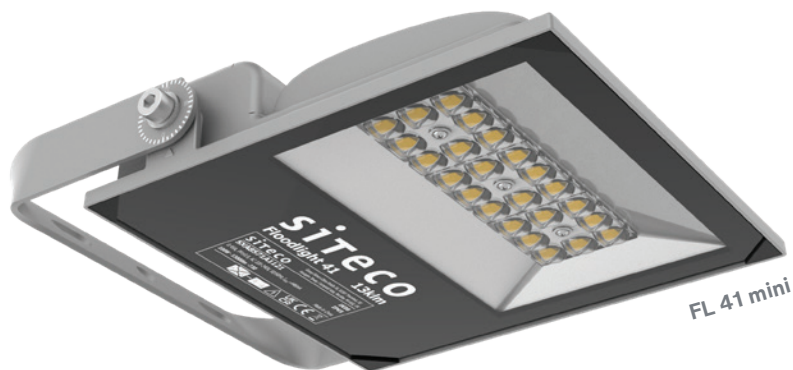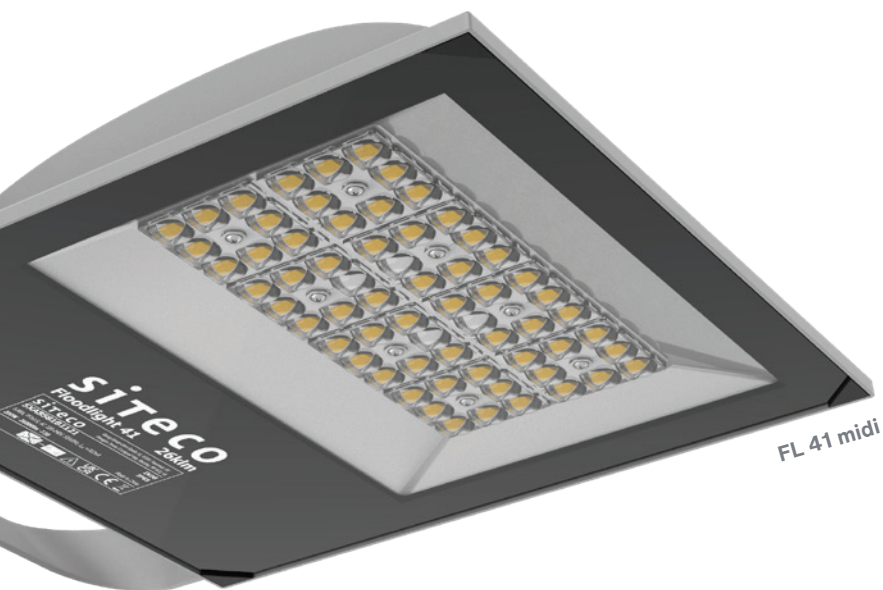

Applies to all FL 41 models:

Optical concept

Lens technology (PC)
Tilt options: from 0° to +180°

Light colors

3000 K | 4000 K
Color rendering: CRI = 70

Type of protection

IP65
Safety class: SK I
Impact resistance: IK08

Mounting



Preinstalled 2m connection cable
Preinstalled mounting-bracket system

Control system

ON / OFF | multi-lumen switch

Weight

FL 41 mini: 2.4 kg
FL 41 midi: 3.9 kg



Multi-lumen function

	FL 41 mini		FL 41 midi	
	lm	W	lm	W
Pre-adjusted basic settings	13,000	100	26,000	200
1	9,100	70	22,100	170
2	6,500	50	19,500	150
3	3,900	30	13,000	100

The floodlight for universal applications.

Flexible and cost efficient.



Floodlight FL 41 mini

Technical data

Luminous flux: 3,900 lm to 13,000 lm
 Power: up to 100 W
 Luminous efficacy: 130 lm / W
 Service life: 50,000 h (L80 / B50) at 25 °C

Applications

Façades, parking lots, loading zones, town squares

Order numbers

3,000 K CRI 70	5XA8571A1121
4,000 K CRI 70	5XA8571A2121



Floodlight FL 41 midi

Technical data

Luminous flux: 13,000 lm to 26,000 lm
 Power: up to 200 W
 Luminous efficacy: 130lm/W
 Service life: 50,000 h (L80 / B50) at 25 °C

Applications


Façades, parking lots, loading zones, town squares

Order numbers

3,000 K CRI 70	5XA8581B1121
4,000 K CRI 70	5XA8581B2121

Light distribution for floodlight FL 41 models:

PL32 – to narrowly distribute light on town squares



Contact.

Stefanie Mützel
 Product Manager
 Tel. +49 171 815 632 4
 s.muettel@siteco.de

siteco.com