


Photometric test report

Family Scriptus®	Order number: 5MZ313D0TWB EAN: 4058352198414	LP number 57450_16
	Version symmetrical design, MLA-optic, tunable white, direct/indirect wide distribution, UGR≤19 Lamps LED 3000K + 6500K / CRI ≥ 80 (unbekannt LED 3000K + 6500K / CRI = 80) Controlgear ECG-DALI Setting individual position: only indirect ratio, 6500K Rated values Net luminous flux = 6780 lm Power consumption = 53.4 W Luminous efficacy = 127 lm/W	serial documentation 11.08.2017





Luminous intensity in cd/klm C180-0 C270-90 **Imax: 318 cd/klm**

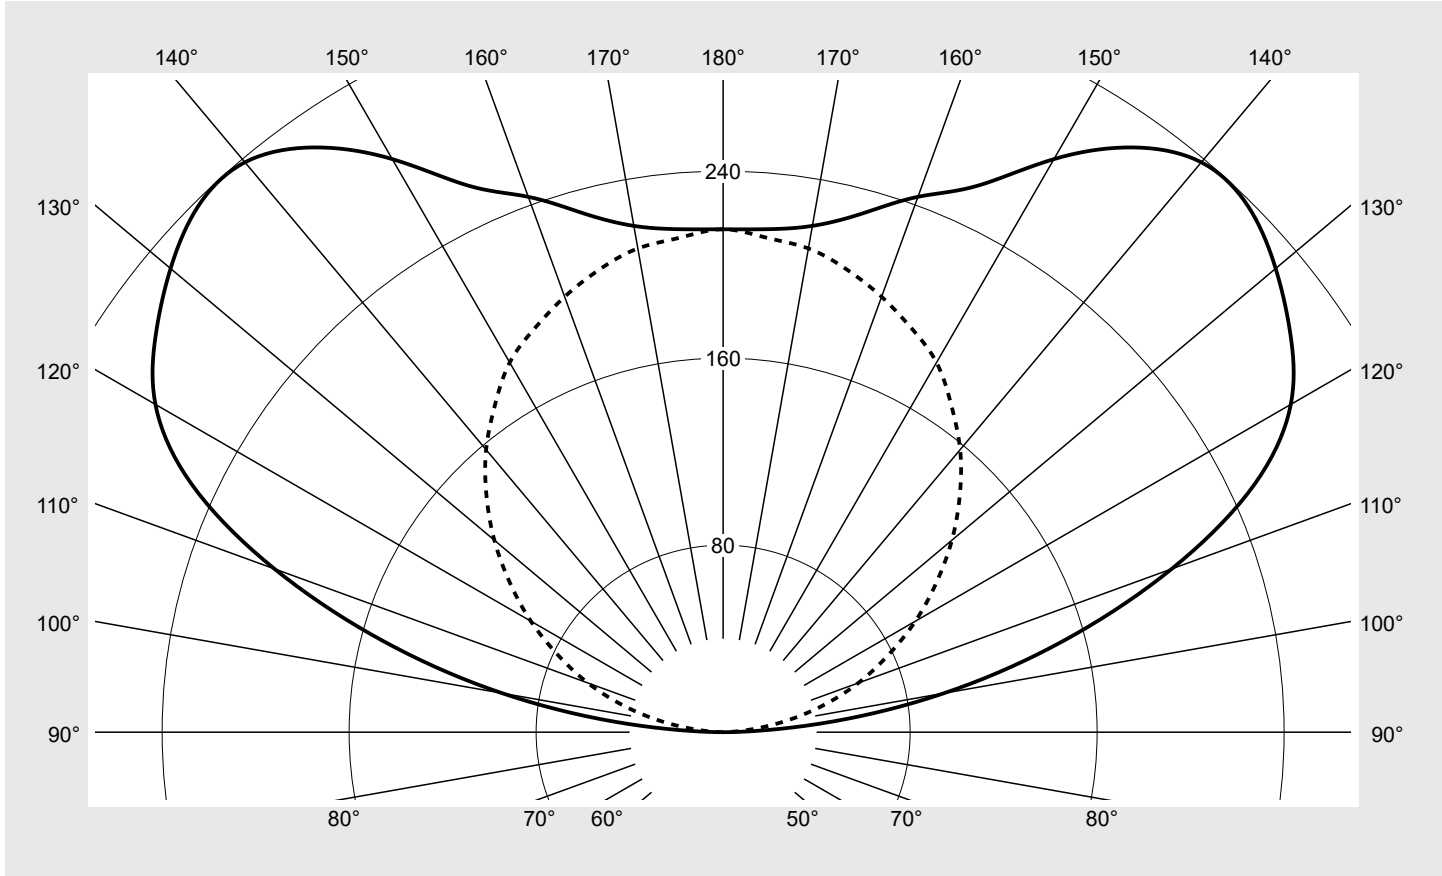

Classifications	
DIN 5040	E 1 2
CIE	N1=0 N2=0 N3=0 N4=0 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	0.0%
ϕ_o	100.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Scriptus®	Order number: 5MZ313D0TWB EAN: 4058352198414	LP number 57450_16
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
10°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
15°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
20°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
25°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
30°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
35°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
40°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90°	0.8	0.8	0.9	0.8	0.6	0.4	0.1	0.4	0.4
95°	41.2	42.2	44.4	39.1	25.0	16.0	10.0	17.5	17.9
100°	96.0	96.7	96.6	83.6	54.4	34.4	26.7	38.4	56.3
105°	150.5	153.4	153.5	128.5	79.5	51.0	44.3	58.5	114.8
110°	204.2	207.6	202.6	163.4	99.0	68.1	61.6	75.0	189.8
115°	250.8	249.3	238.0	184.6	113.0	84.8	77.9	85.6	275.4
120°	280.4	275.4	260.2	196.8	126.1	100.8	95.0	90.8	366.2
125°	296.3	293.2	270.9	203.0	138.6	116.0	111.3	91.7	457.9
130°	308.6	301.4	276.9	207.7	151.4	129.9	127.8	90.0	547.8
135°	317.8	309.2	274.9	208.0	163.7	143.5	143.2	85.9	633.8
140°	318.3	306.9	268.2	210.7	175.3	156.0	157.8	79.6	713.3
145°	305.4	292.0	256.0	213.7	187.6	168.6	170.4	71.0	784.4
150°	283.1	270.6	243.4	217.3	194.4	179.4	182.6	61.1	845.5
155°	258.0	251.7	237.2	218.6	199.2	189.3	190.7	51.0	896.5
160°	243.7	239.1	231.0	215.0	204.4	198.0	198.2	40.9	937.3
165°	229.7	227.1	221.3	214.6	209.3	205.7	204.8	30.6	968.0
170°	219.9	220.6	217.8	214.5	211.9	211.8	210.1	20.5	988.4
175°	216.0	215.4	215.3	215.0	215.0	214.0	212.4	10.3	998.7
180°	215.1	215.1	215.1	215.1	215.1	215.1	215.1	1.3	1000.0

Photometric test report

Family Scriptus®	Order number: 5MZ313D0TWB EAN: 4058352198414	LP number 57450_16
UGR-Table Standard room		sITeco

The UGR formula for this luminaire type cannot be used, see LiTG Publication 20:
"The UGR - Process for Evaluation of Direct Glare of Artificial Lighting in Indoor Rooms"

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 2300 B = 42
------------------------	---	-------------------------------	--------------------

C-planes	γ	0°	15°	30°	45°	60°	75°	90°
		180°	165°	150°	135°	120°	105°	270°
		195°	210°	225°	240°	255°	285°	
		345°	330°	315°	300°	285°	270°	
		Luminance in cd/m ²						
45°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
50°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
55°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
60°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
65°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
70°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
75°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Scriptus®	Order number: 5MZ313D0TWB EAN: 4058352198414	LP number 57450_16
-----------------------------------	---	-------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85°

