



Licross®

L - Verbinder

59TR . CL

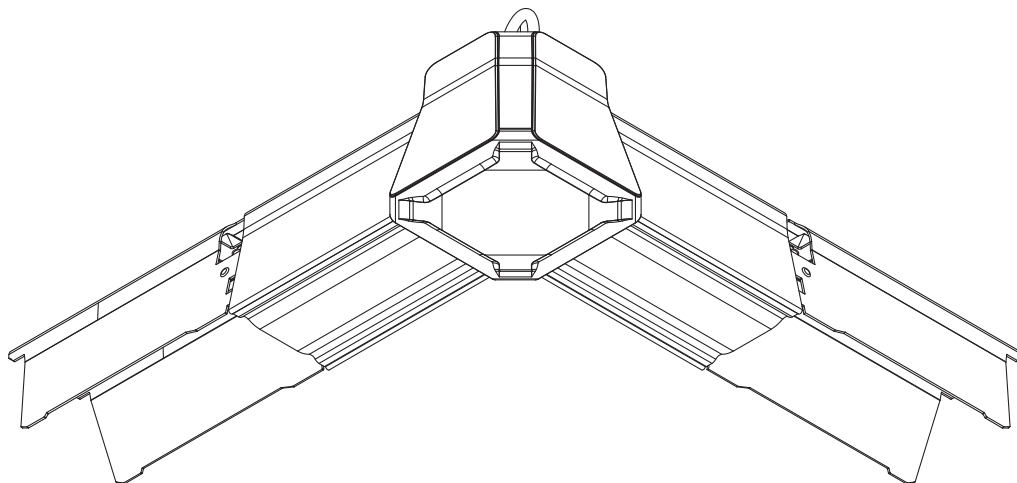


**siteco**




[ mm ]


1x

59TR1CL  
59TR3CL  
59TR6CL


 = 1.5 kg

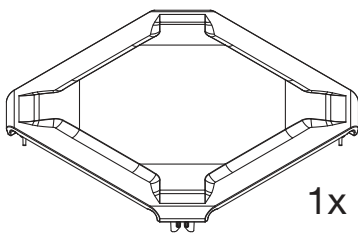


1x




1x




2x




IN

59TL3FNK → 




IN


OUT

59TL3LX7  
59TL3LXE → 


---

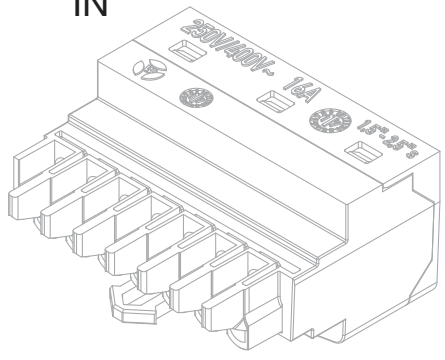


IN

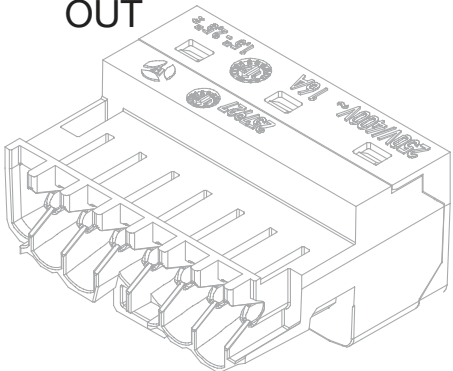



OUT

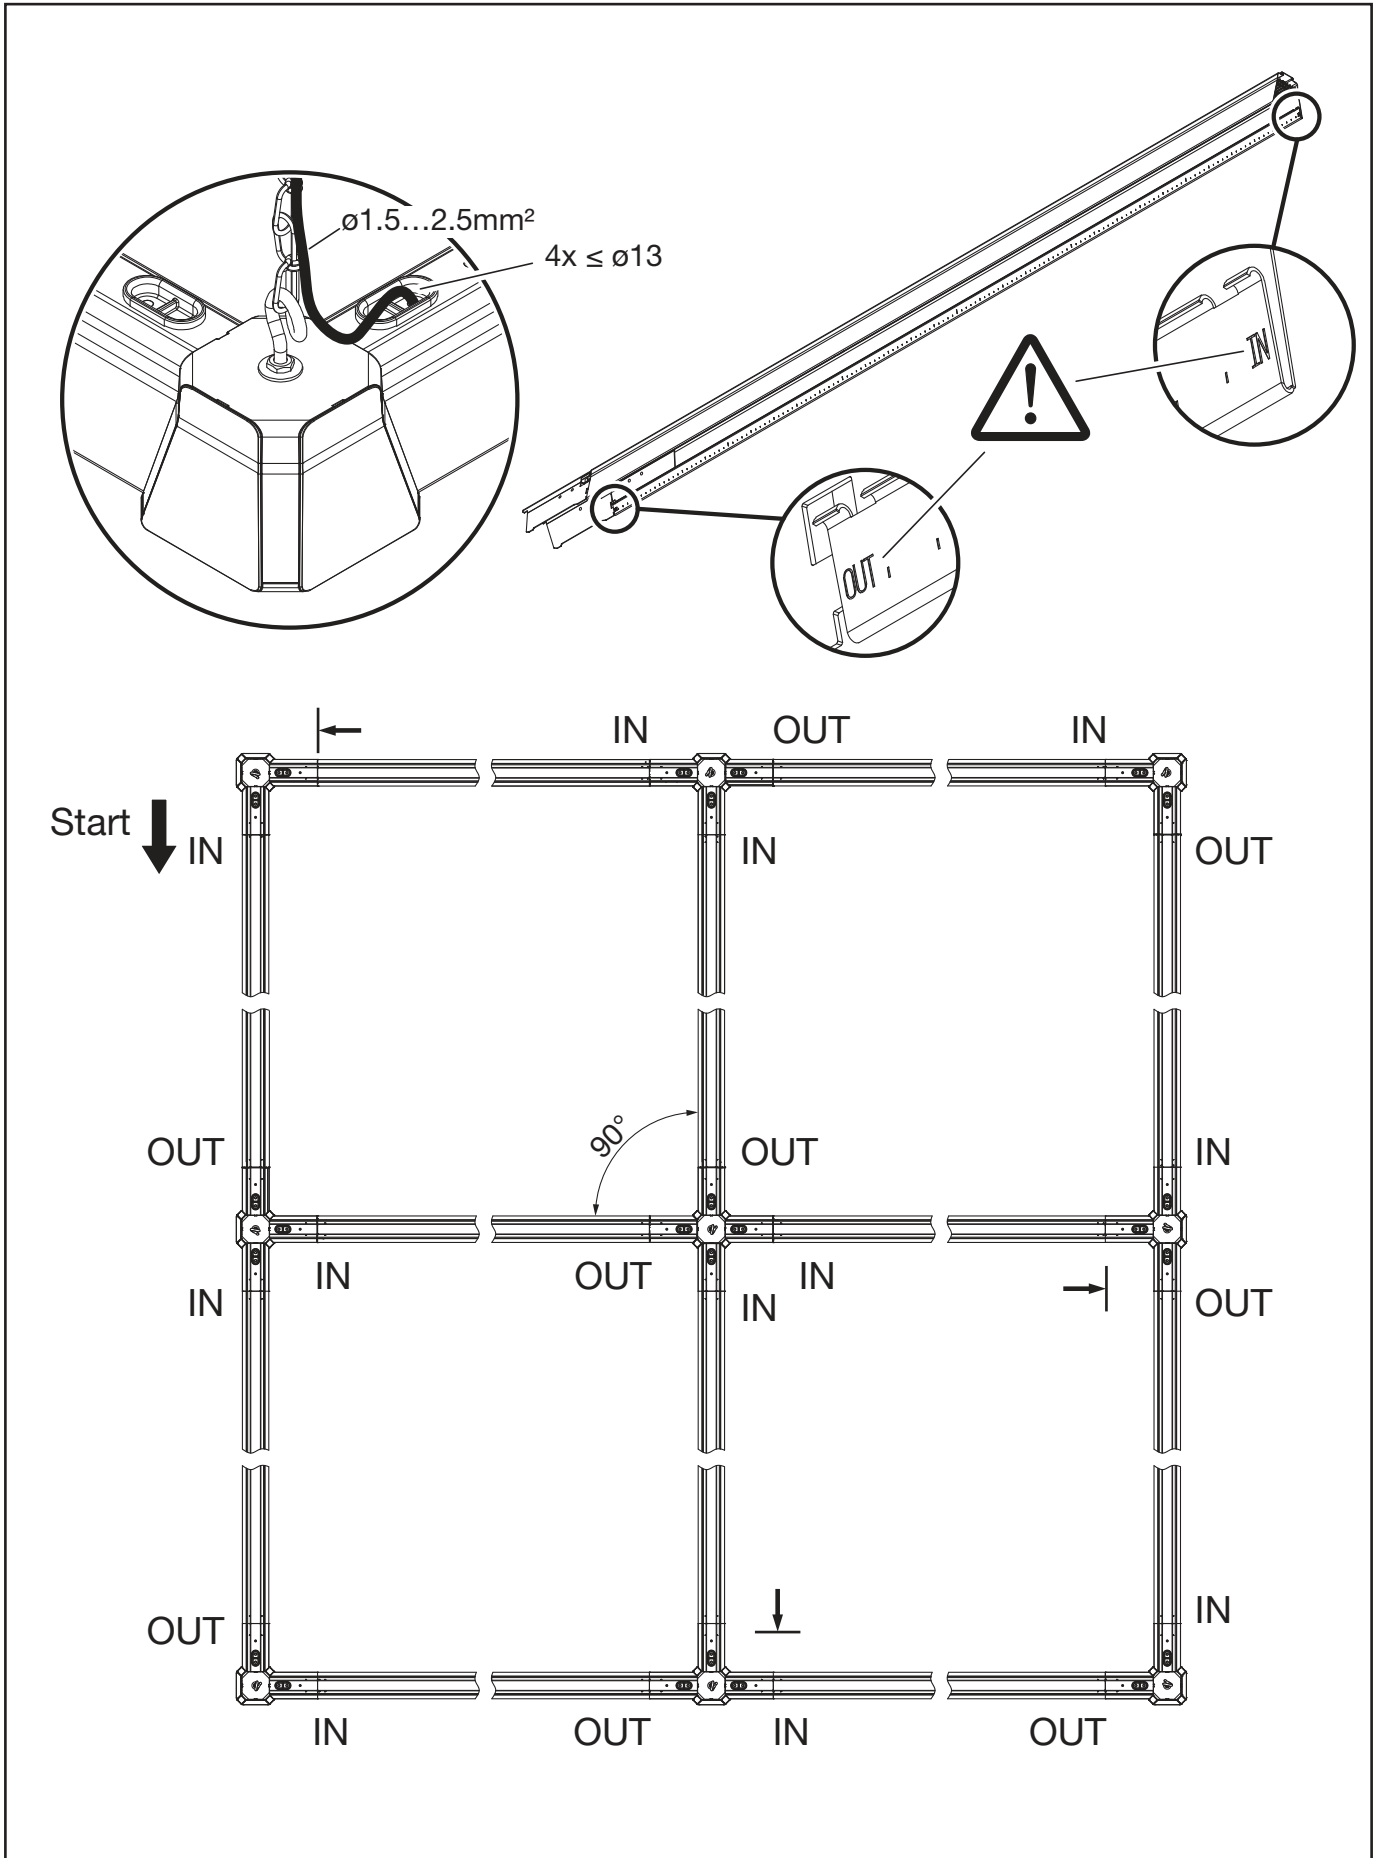


**1** Umgebungstemperatur während der Installation: +5°C...+40°C  
 Ambient temperature during installation:


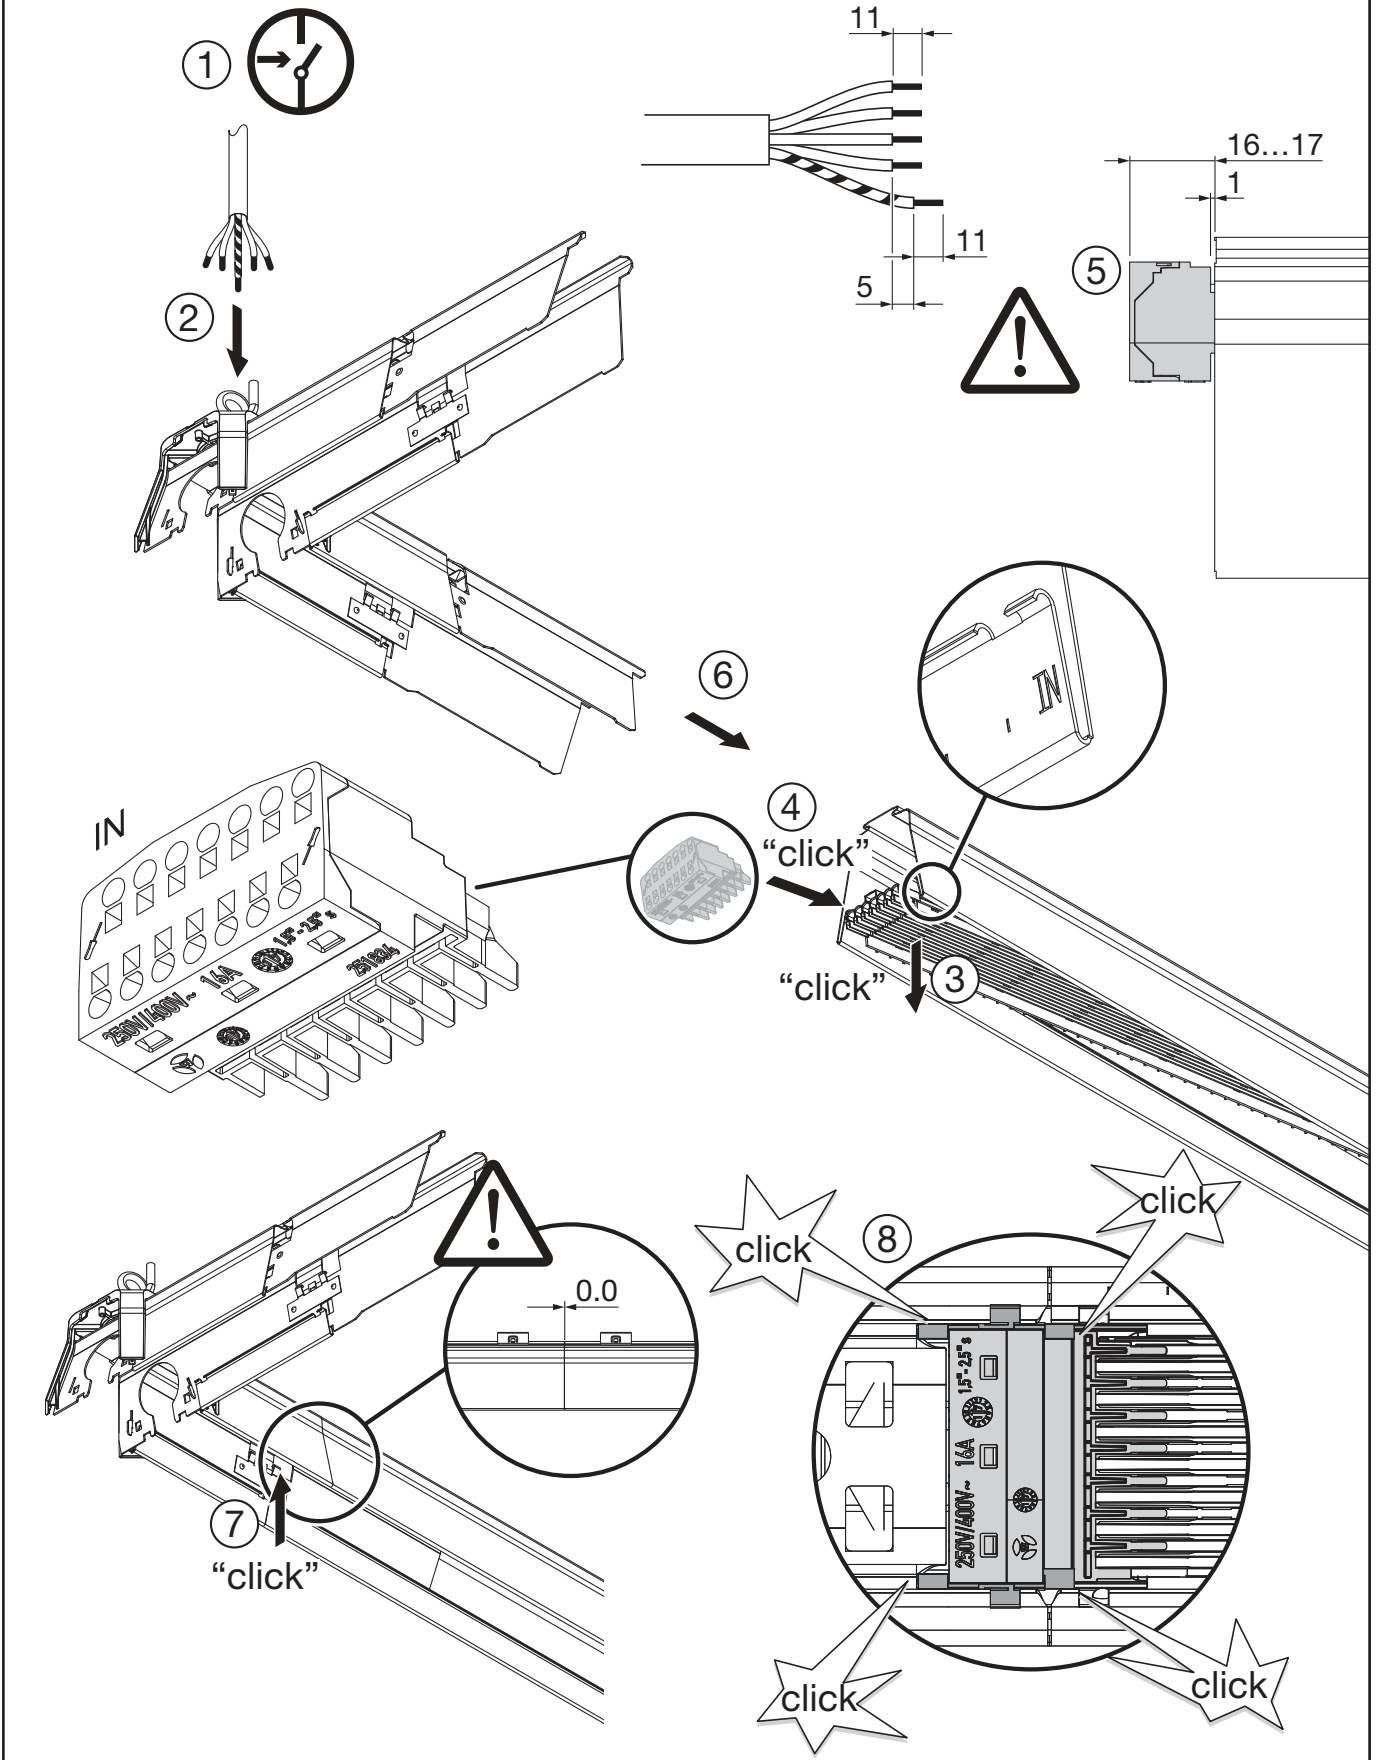


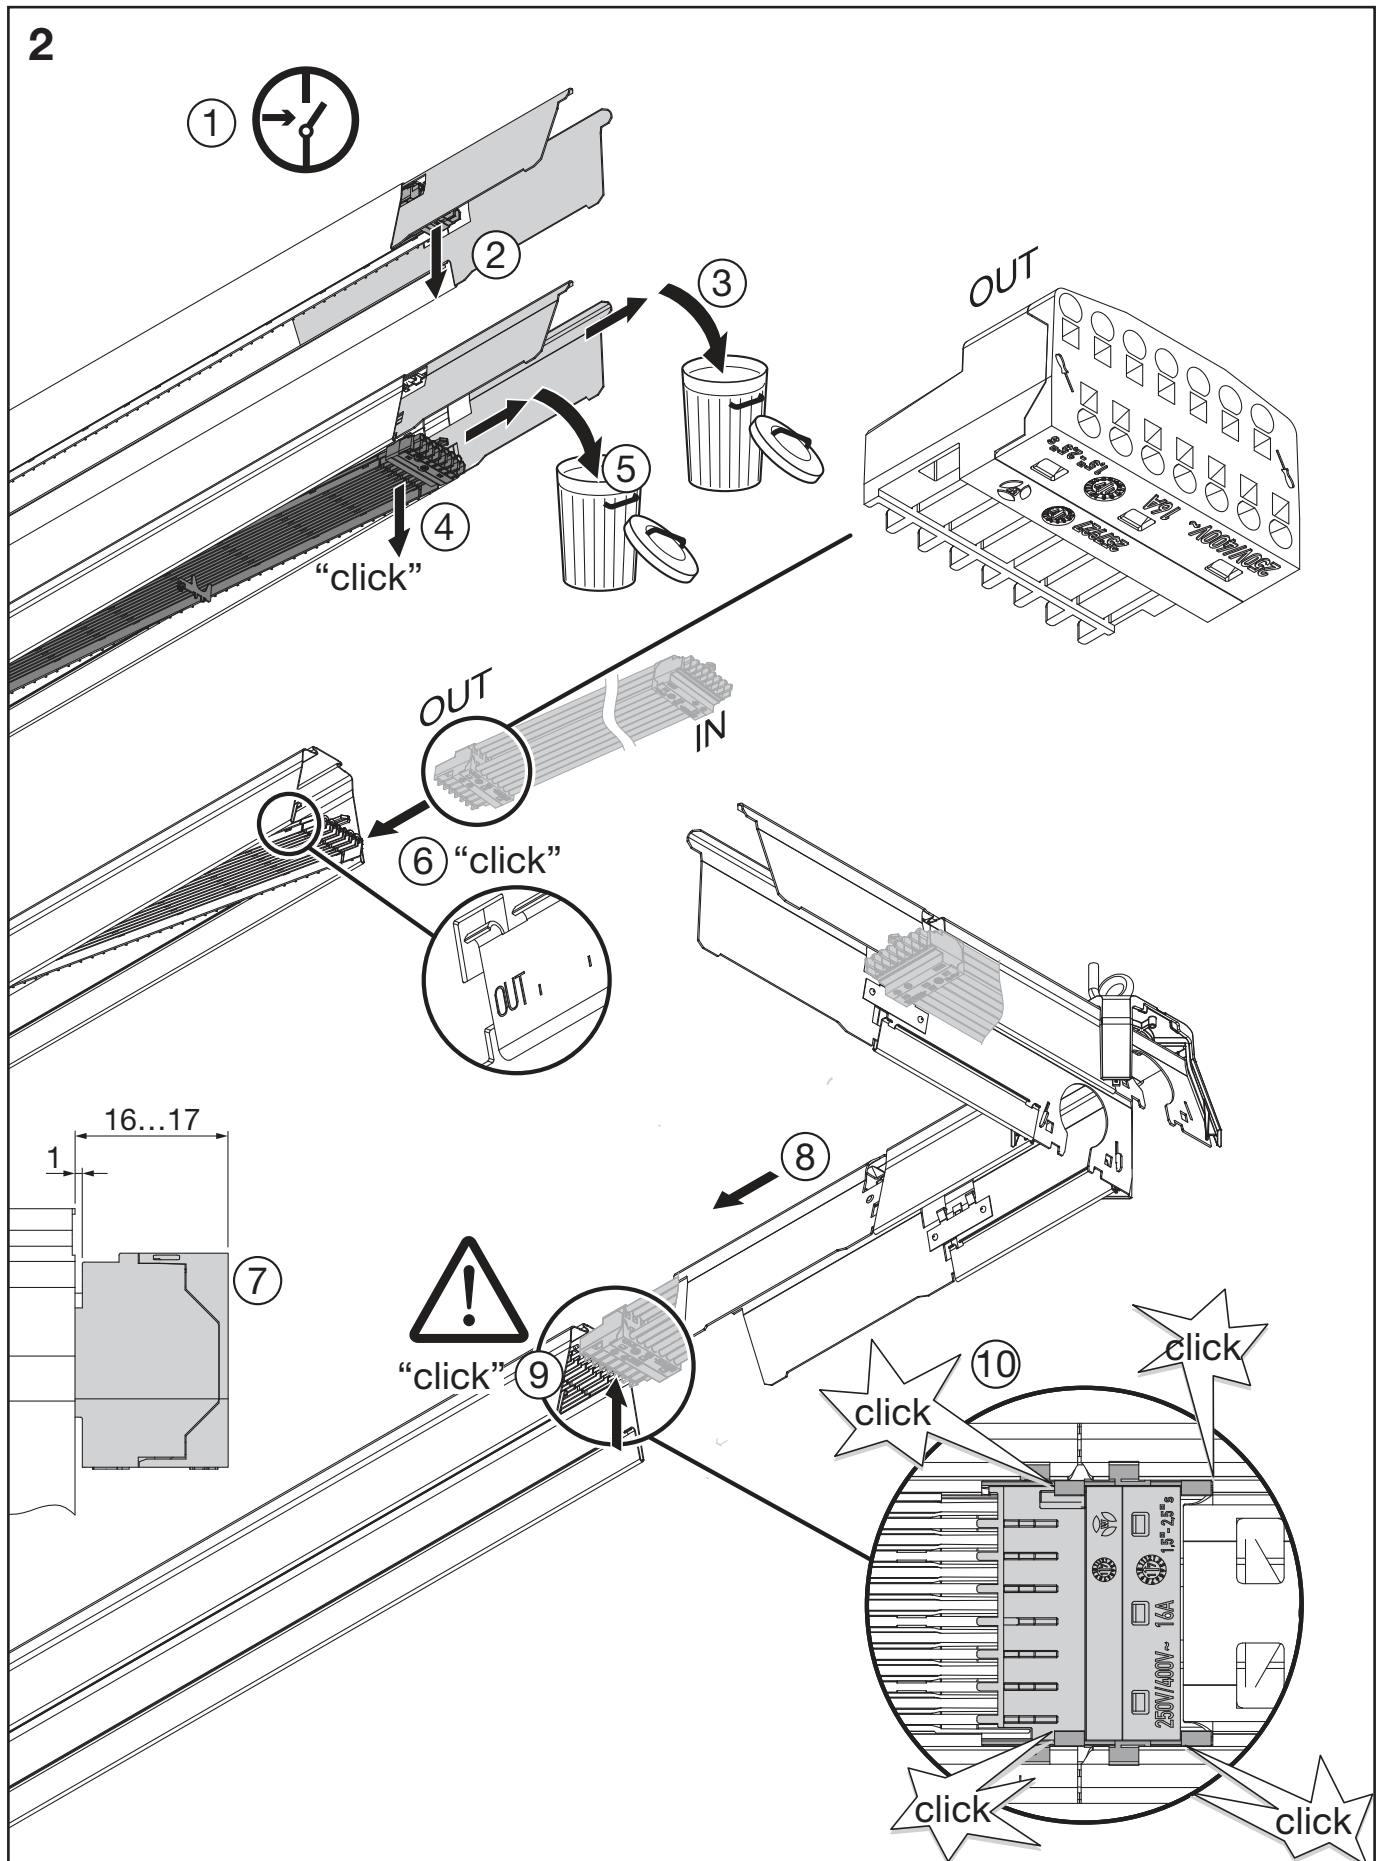

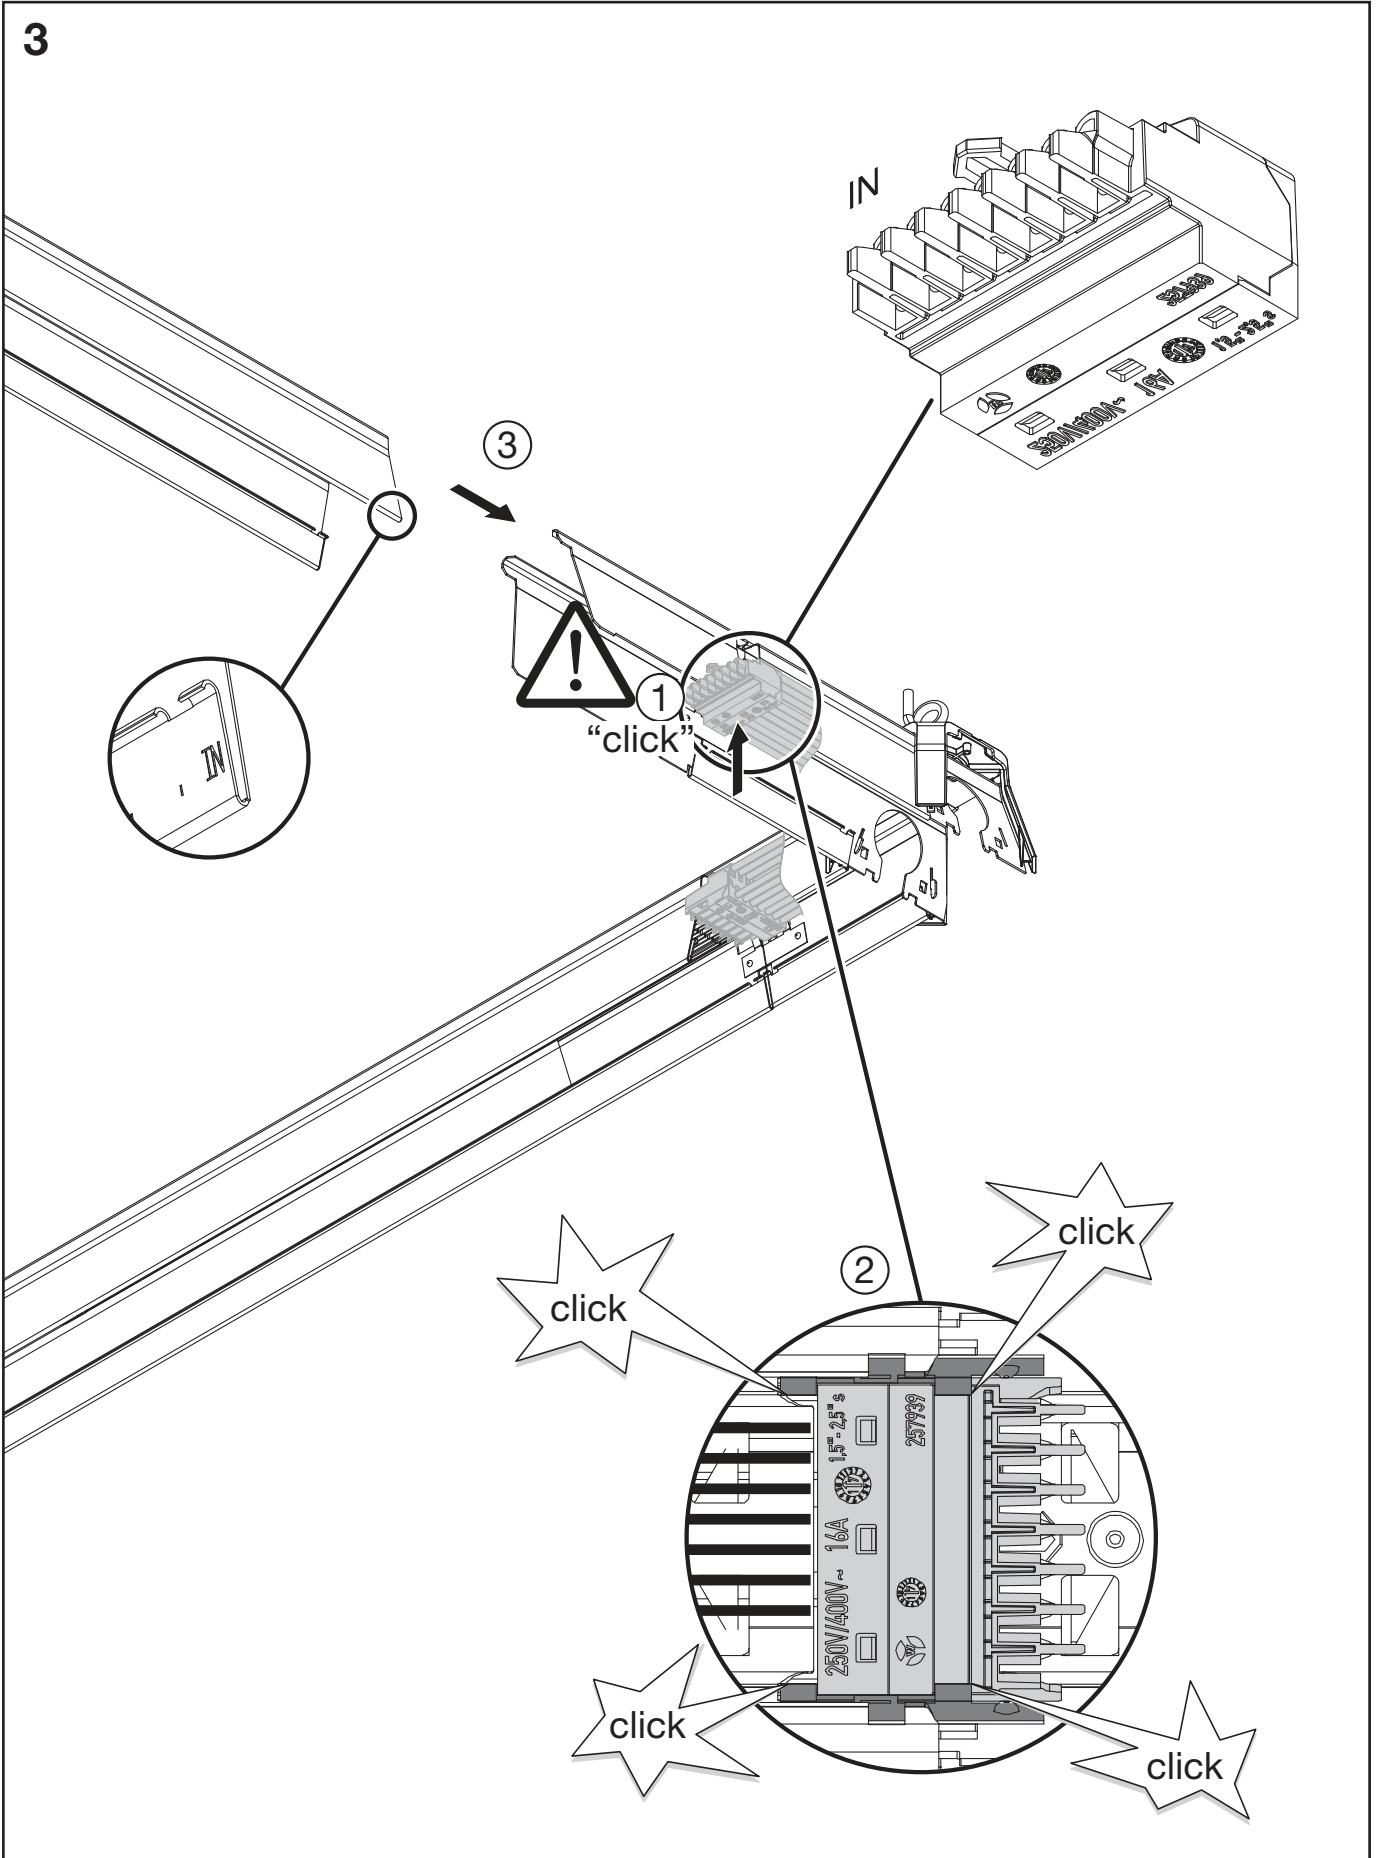

4a

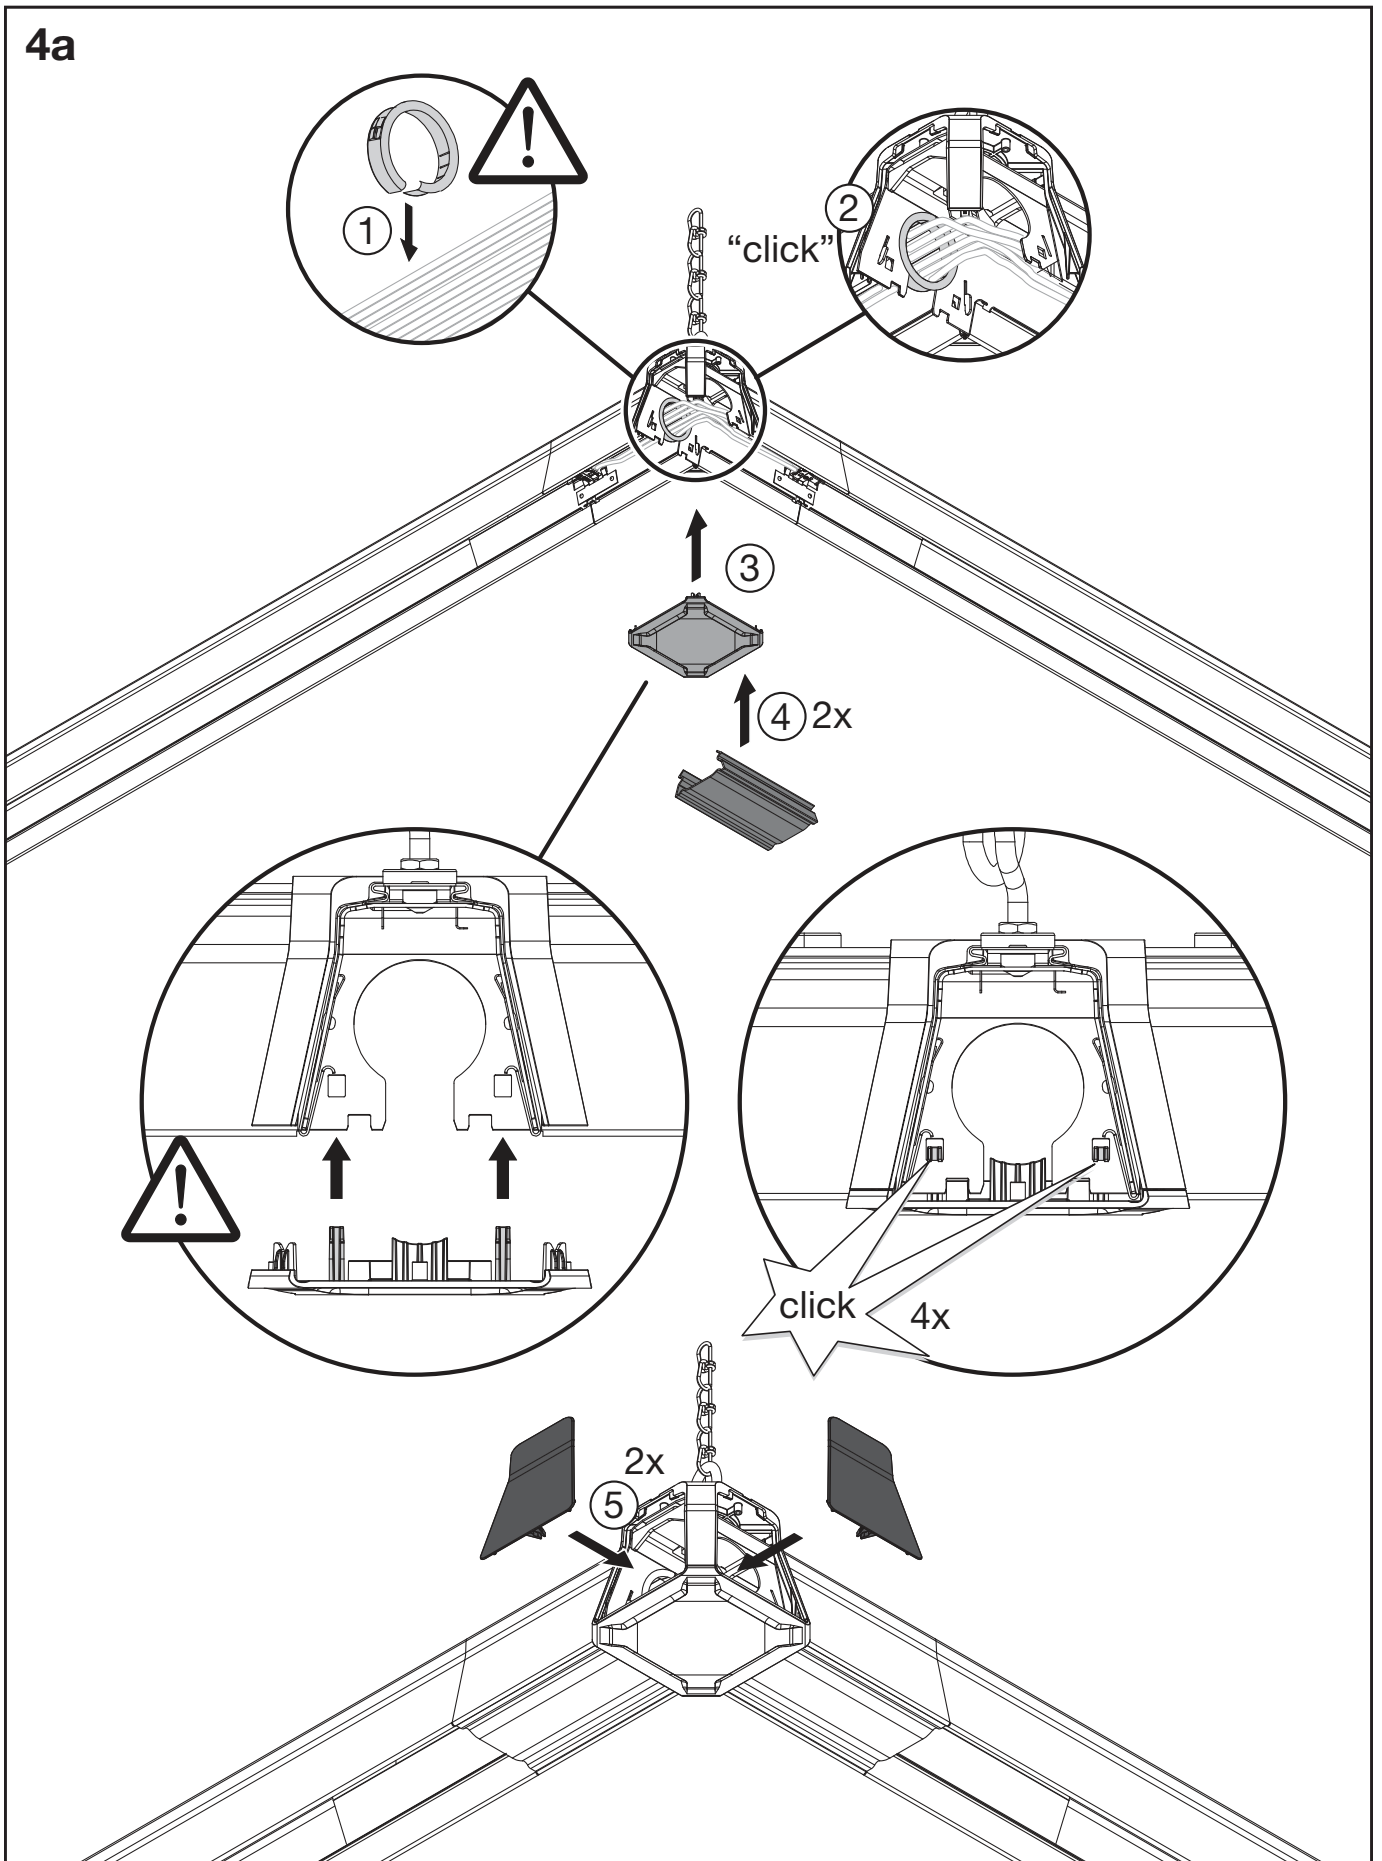

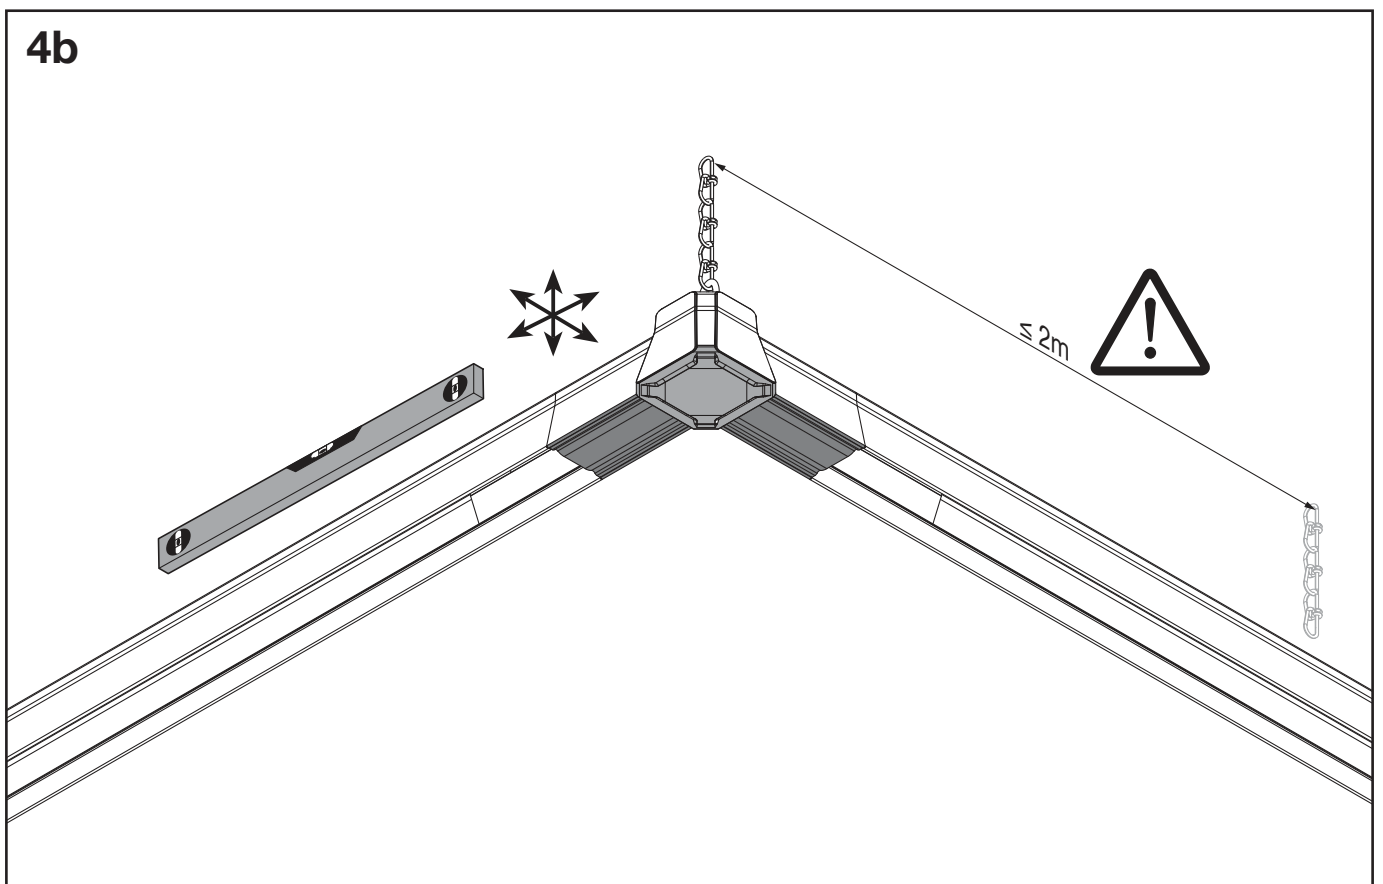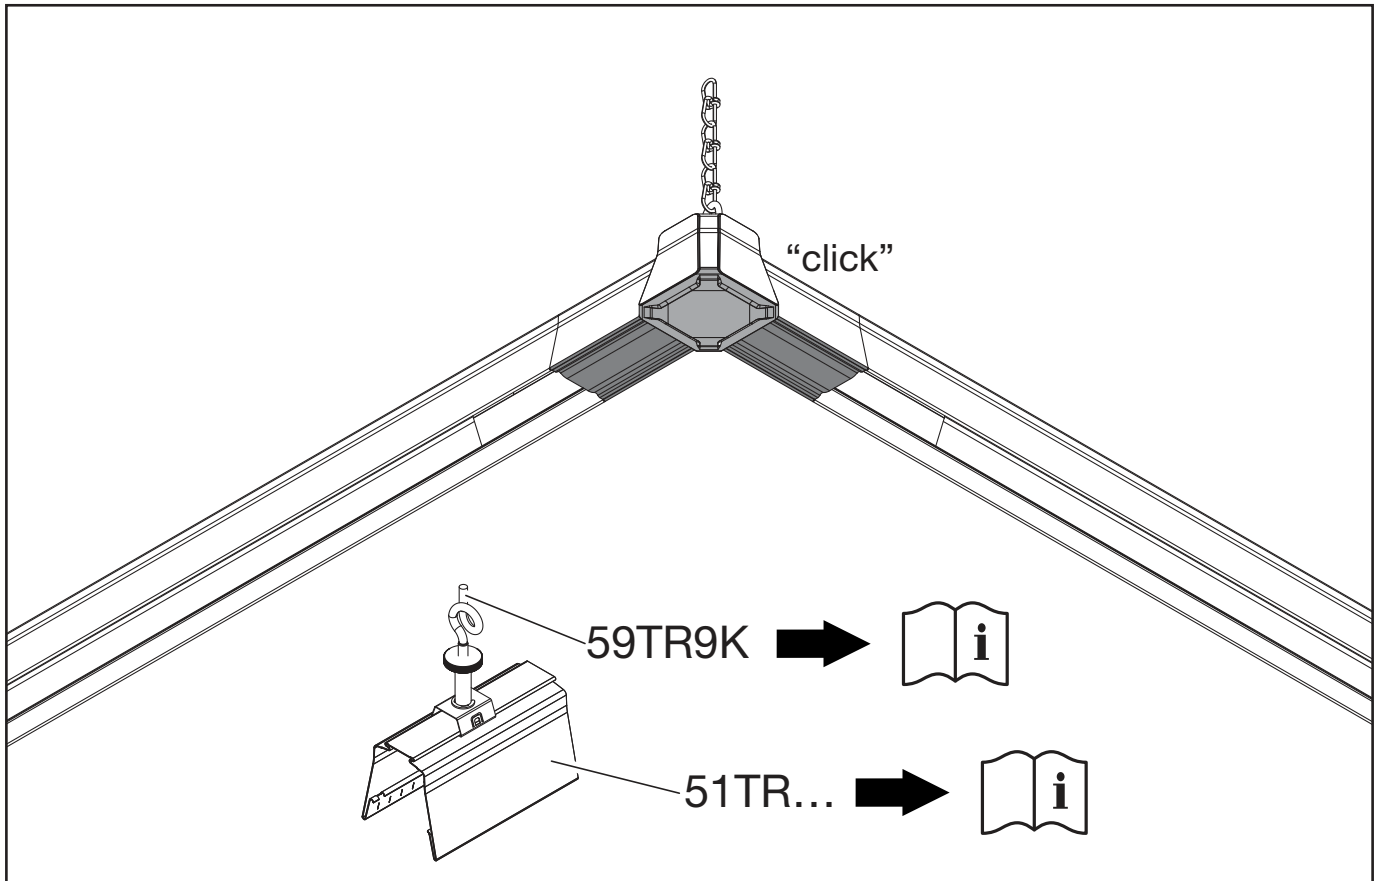

5MA14-259084\_ab  
10.01.2022 / SCH

Siteco GmbH  
Georg-Simon-Ohm-Straße 50  
83301 Traunreut, Germany  
mail: [technicalsupport@siteco.de](mailto:technicalsupport@siteco.de)  
Phone: +49 8669 / 33-844  
[www.siteco.com](http://www.siteco.com)