

# Photometric test report

<b>Family</b> <b>Monsun® 21</b>	<b>Order number: 51FB10MP480B</b> <b>EAN: 4058352520079</b>	<b>LP number</b> <b>58939_96</b>
	<b>Version</b> prismatic diffuser, opal, PMMA, wide distribution <b>Lamps</b> LED 4000 K   CRI ≥ 80 <b>Controlgear</b> ECG Multilumen <b>Rated values</b> Net luminous flux = 8190 lm Power consumption = 53.6 W Luminous efficacy = 152.8 lm/W	<b>serial documentation</b> <b>12.01.2023</b>
		

**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 340 cd/klm**



Classifications	
DIN 5040	A 4 1
CIE	N1=47 N2=77 N3=93 N4=94 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	94.2%
$\phi_o$	5.8%

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> <b>Monsun® 21</b>	<b>Order number: 51FB10MP480B</b> <b>EAN: 4058352520079</b>	<b>LP number</b> <b>58939_96</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	340.1	340.1	340.1	340.1	340.1	340.1	340.1	2.0	2.0
5°	339.4	338.3	336.5	337.9	339.5	339.4	339.8	16.2	18.2
10°	333.5	333.0	331.2	332.8	334.6	334.7	335.0	31.7	49.9
15°	324.2	324.2	322.5	324.2	326.1	326.4	326.9	46.1	96.0
20°	311.0	311.6	310.1	311.9	314.1	314.7	315.3	58.6	154.6
25°	294.4	295.4	294.1	296.0	298.4	299.4	300.2	68.7	223.4
30°	275.2	276.6	275.1	276.8	279.4	280.7	281.6	76.1	299.5
35°	253.9	255.2	253.8	254.9	257.1	258.4	259.7	80.5	380.0
40°	231.8	232.9	231.3	231.1	232.5	233.8	235.1	81.9	461.9
45°	209.4	209.9	207.8	205.9	206.1	206.6	208.2	80.4	542.4
50°	187.2	187.1	184.8	181.3	179.3	178.3	179.7	76.6	619.0
55°	165.5	164.8	162.1	157.0	153.1	150.2	150.9	70.7	689.7
60°	143.9	142.9	139.5	133.7	127.9	123.2	122.7	63.3	753.0
65°	123.6	122.5	117.8	111.0	104.2	97.9	96.0	54.9	808.0
70°	104.7	103.3	97.1	89.4	81.7	74.3	71.0	45.8	853.8
75°	86.1	84.4	77.8	69.2	60.2	52.2	47.8	36.3	890.0
80°	68.0	66.1	60.2	50.5	40.7	32.1	26.9	26.7	916.7
85°	51.8	50.0	44.6	35.3	24.7	15.7	10.1	18.3	935.0
90°	40.8	39.2	34.4	26.0	15.9	6.9	1.8	13.1	948.2
95°	34.8	33.5	29.7	22.7	13.6	5.1	1.6	11.2	959.3
100°	29.9	28.8	25.4	19.2	11.3	3.7	1.4	9.4	968.7
105°	25.7	24.7	21.4	16.1	8.8	2.4	1.2	7.7	976.4
110°	22.1	20.9	18.0	13.0	6.6	1.4	1.1	6.1	982.5
115°	19.0	17.8	15.0	10.4	4.7	1.2	1.1	4.9	987.4
120°	16.0	14.8	12.2	7.9	3.1	1.2	1.0	3.8	991.2
125°	13.0	11.9	9.4	5.6	1.7	1.1	0.9	2.7	993.9
130°	10.1	9.1	6.9	3.7	1.4	1.1	1.0	1.9	995.9
135°	7.3	6.5	4.6	2.1	1.4	1.1	1.1	1.3	997.1
140°	4.8	4.1	2.7	1.7	1.4	1.1	1.1	0.8	998.0
145°	2.6	2.3	1.9	1.7	1.4	1.2	1.2	0.5	998.5
150°	2.0	2.0	1.9	1.6	1.3	1.3	1.3	0.4	998.9
155°	1.9	1.9	1.7	1.6	1.4	1.4	1.4	0.4	999.3
160°	1.7	1.7	1.6	1.4	1.4	1.4	1.4	0.3	999.6
165°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.8
170°	1.3	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.9
175°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

## Photometric test report

Family <b>Monsun® 21</b>	Order number: <b>51FB10MP480B</b> EAN: <b>4058352520079</b>	LP number <b>58939_96</b>
-----------------------------	--	------------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.1	22.8	21.5	23.1	23.5	21.1	22.8	21.5	23.1	23.4
	3H	22.9	24.4	23.2	24.7	25.1	22.5	24.0	22.9	24.4	24.7
	4H	23.7	25.1	24.1	25.5	25.9	23.0	24.5	23.4	24.8	25.2
	6H	24.4	25.8	24.8	26.1	26.5	23.4	24.7	23.8	25.1	25.5
	8H	24.8	26.1	25.2	26.4	26.8	23.5	24.8	23.9	25.2	25.6
	12H	25.1	26.3	25.5	26.7	27.1	23.6	24.8	24.0	25.2	25.6
4H	2H	21.8	23.3	22.2	23.6	24.0	21.8	23.3	22.2	23.6	24.0
	3H	23.8	25.0	24.2	25.4	25.8	23.4	24.6	23.8	25.0	25.4
	4H	24.7	25.9	25.2	26.3	26.7	24.0	25.2	24.5	25.6	26.0
	6H	25.6	26.6	26.1	27.1	27.5	24.5	25.5	25.0	25.9	26.4
	8H	26.1	27.0	26.5	27.4	27.9	24.7	25.6	25.1	26.0	26.5
	12H	26.5	27.3	27.0	27.7	28.2	24.8	25.6	25.2	26.0	26.5
8H	4H	25.0	26.0	25.5	26.4	26.9	24.4	25.3	24.9	25.8	26.3
	6H	26.1	26.9	26.6	27.4	27.9	25.1	25.8	25.5	26.3	26.8
	8H	26.7	27.4	27.2	27.8	28.3	25.3	26.0	25.8	26.4	27.0
	12H	27.2	27.8	27.7	28.3	28.8	25.4	26.0	25.9	26.5	27.0
12H	4H	25.1	25.9	25.6	26.4	26.9	24.5	25.3	25.0	25.8	26.3
	6H	26.2	26.9	26.7	27.4	27.9	25.2	25.9	25.7	26.4	26.9
	8H	26.8	27.4	27.3	27.9	28.4	25.5	26.1	26.0	26.6	27.1


<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1590</b>	<b>H(C0) = 21</b>	<b>H(C180) = 21</b>
			<b>B = 87</b>	<b>H(C90) = 21</b>	<b>H(C270) = 21</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		14121.9	14209.5	14313.4	14612.7	15243.4	16087.6	17203.7	
50°		13393.7	13443.3	13543.8	13750.5	14270.5	15072.2	16295.1	
55°		12700.5	12715.3	12793.1	12893.9	13295.9	13996.5	15285.1	
60°		12015.3	12005.2	12026.1	12064.3	12329.2	12907.8	14207.6	
65°		11413.0	11385.5	11289.2	11217.6	11375.1	11810.5	13079.1	
70°		10895.8	10834.3	10553.1	10353.8	10372.2	10654.9	11866.8	
75°		10356.6	10258.8	9865.2	9465.1	9230.3	9325.5	10425.4	
80°		9785.1	9622.6	9228.3	8516.9	7923.7	7660.1	8525.6	
85°		9368.1	9169.7	8741.0	7849.0	6671.8	5716.8	5954.1	

**Photometric test report**

<b>Family</b> <b>Monsun® 21</b>	<b>Order number: 51FB10MP480B</b> <b>EAN: 4058352520079</b>	<b>LP number</b> <b>58939_96</b>
------------------------------------	--	-------------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

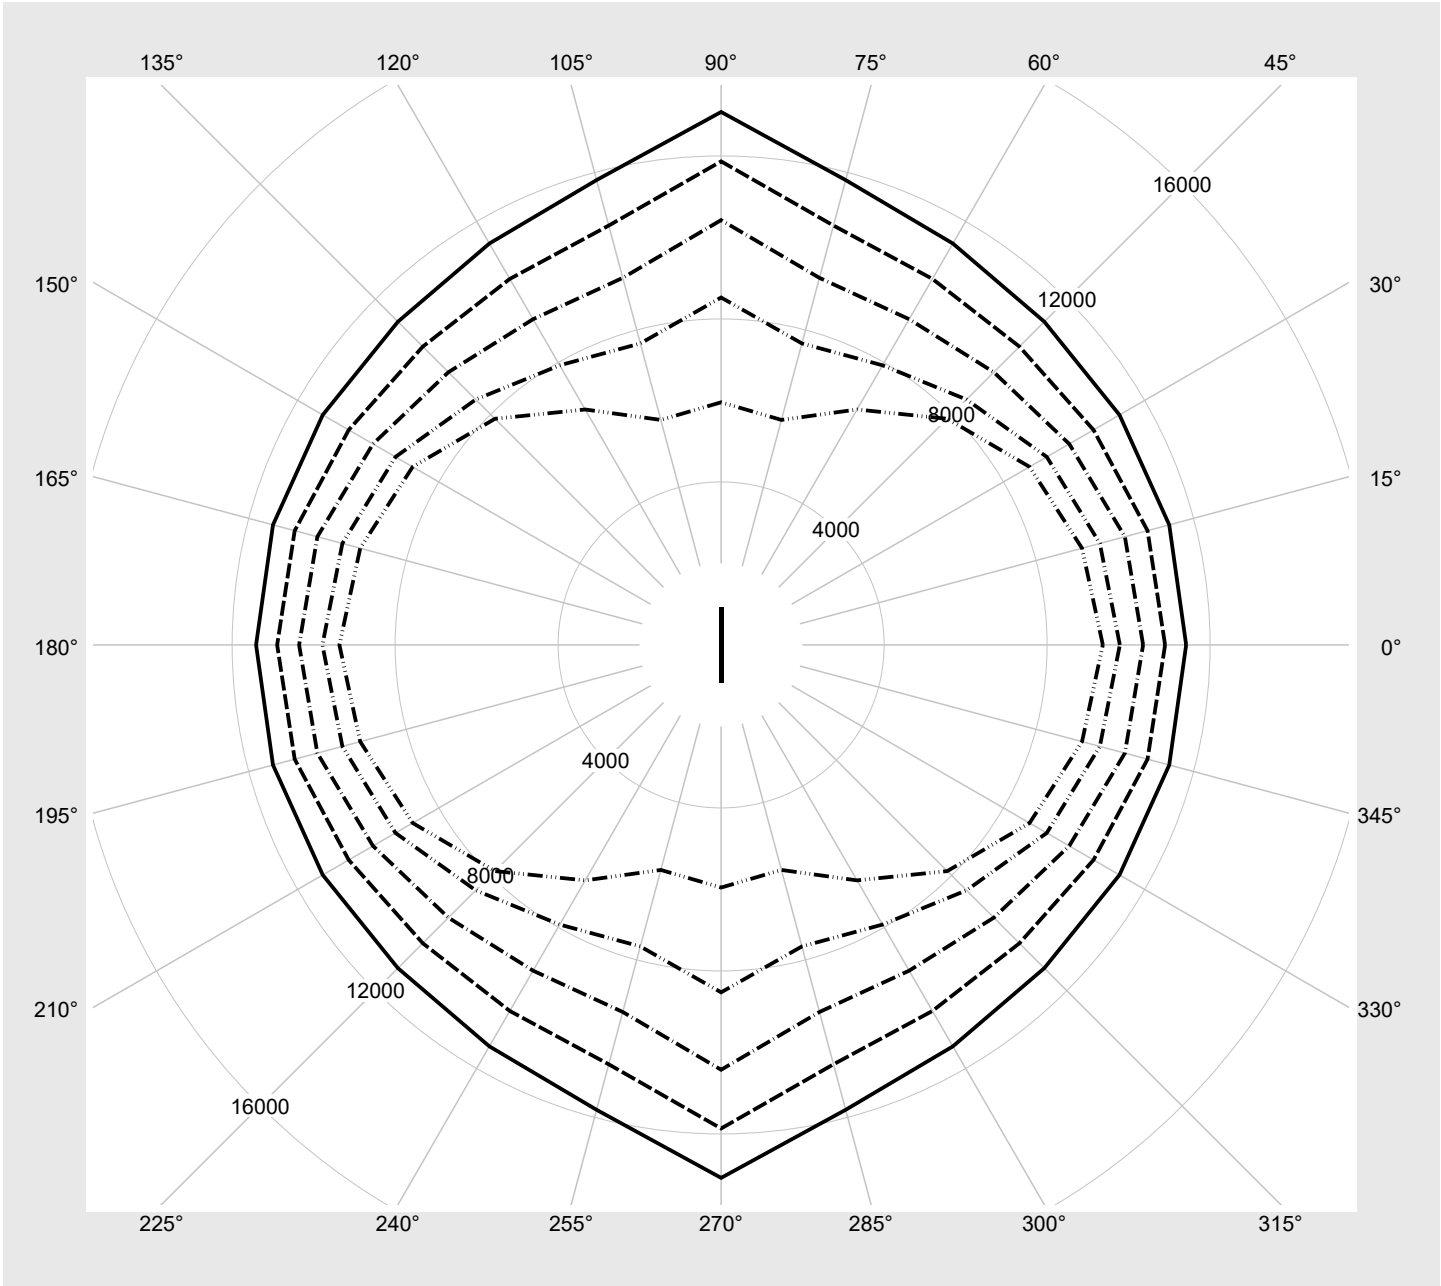

## Photometric test report

Family <b>Monsun® 21</b>	Order number: <b>51FB10MP480B</b> EAN: <b>4058352520079</b>	LP number <b>58939_96</b>
-----------------------------	--	------------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>sITeco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	8190	53.6
2	A	C	F	7390	47.6
3	A	D	E	6830	43.5
4	A	D	F	6190	39.0
5	B	C	E	5610	35.0
6	B	C	F	5010	31.0
7	B	D	E	4410	27.1
8	B	D	F	3860	23.6