

Photometric test report

Family
Monsun® 12

Order number: **51FP22MP4B0Q**
EAN: **4058352389850**

LP number
59059_2



Version prismatic diffuser, opal, polycarbonate, medium distribution

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG Multilumen

Rated values Net luminous flux = 10520 lm
Power consumption = 66.2 W
Luminous efficacy = 158.9 lm/W

serial
documentation
26.08.2020


sitEco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: **386 cd/klm**

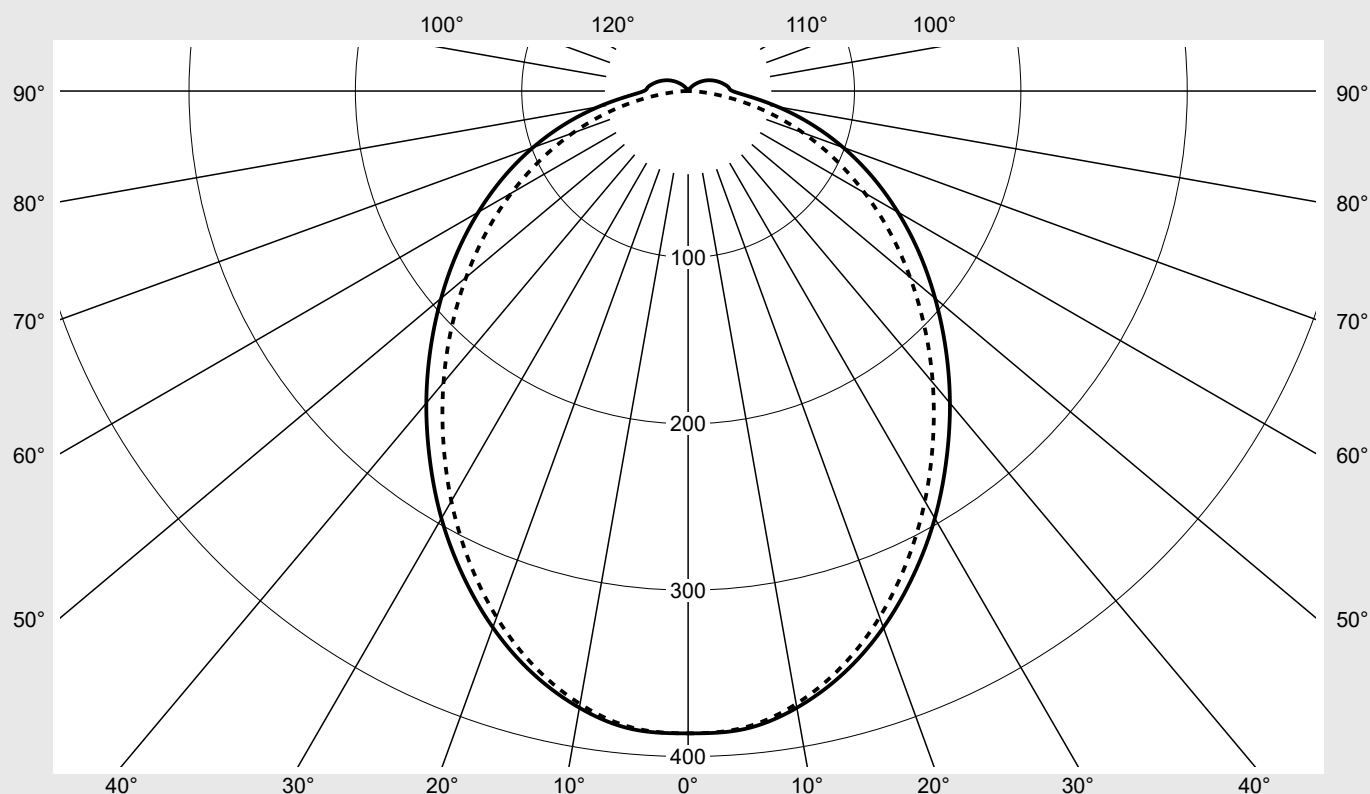

Classifications

DIN 5040 A 4 1
CIE N1=49 N2=78 N3=94
N4=96 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 95.7%
 ϕ_o 4.3%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Monsun® 12	Order number: 51FP22MP4B0Q EAN: 4058352389850	LP number 59059_2
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	386.1	386.1	386.1	386.1	386.1	386.1	386.1	2.3	2.3
5°	385.0	383.6	381.1	382.2	383.7	383.7	384.1	18.3	20.6
10°	376.4	374.9	372.1	372.9	373.9	373.8	374.1	35.6	56.2
15°	362.1	360.6	357.5	357.6	358.1	357.6	357.8	50.9	107.1
20°	343.1	341.6	338.1	337.5	337.4	336.4	336.5	63.5	170.5
25°	320.8	319.3	315.3	313.8	313.1	311.7	311.6	72.9	243.5
30°	296.6	295.0	290.7	288.0	286.5	284.8	284.6	79.3	322.7
35°	270.6	269.0	264.8	261.3	258.6	256.7	256.6	82.5	405.2
40°	244.8	243.1	239.0	234.7	231.1	228.9	228.7	83.0	488.2
45°	219.0	217.0	213.1	208.0	204.0	201.1	201.1	81.0	569.2
50°	193.8	191.7	188.2	182.7	178.0	174.2	174.1	76.9	646.1
55°	169.5	167.4	164.1	158.3	152.9	148.5	148.1	71.1	717.2
60°	145.6	143.6	140.4	134.6	128.8	123.6	122.6	63.7	780.8
65°	122.3	120.5	117.1	111.4	105.6	99.9	97.8	55.0	835.9
70°	99.2	97.7	93.7	88.4	82.6	76.6	73.7	45.1	881.0
75°	76.5	75.1	71.0	65.8	59.8	53.8	50.2	34.3	915.3
80°	54.8	53.3	49.6	44.1	38.2	32.1	28.1	23.3	938.6
85°	36.7	35.2	31.7	26.4	20.3	14.3	10.0	13.8	952.3
90°	26.6	25.3	21.8	16.8	10.9	5.1	1.3	8.6	960.9
95°	24.4	23.3	20.0	15.2	9.4	3.8	1.1	7.7	968.6
100°	22.4	21.2	18.1	13.4	8.0	2.7	1.0	6.8	975.3
105°	20.1	19.0	15.9	11.5	6.4	1.8	0.9	5.7	981.1
110°	17.7	16.5	13.7	9.6	4.8	1.1	0.9	4.7	985.8
115°	15.2	14.1	11.5	7.7	3.5	1.1	0.9	3.8	989.6
120°	12.8	11.7	9.4	5.9	2.3	1.1	0.9	2.9	992.5
125°	10.3	9.3	7.2	4.2	1.4	1.0	0.9	2.1	994.7
130°	7.9	7.1	5.2	2.8	1.3	1.1	0.9	1.5	996.2
135°	5.6	5.0	3.5	1.7	1.4	1.1	1.0	1.0	997.2
140°	3.6	3.1	2.1	1.6	1.4	1.2	1.1	0.7	997.9
145°	2.1	2.0	1.8	1.7	1.4	1.3	1.2	0.5	998.5
150°	2.0	1.9	1.8	1.6	1.5	1.4	1.3	0.4	998.9
155°	1.9	1.8	1.7	1.6	1.5	1.4	1.4	0.4	999.3
160°	1.7	1.7	1.6	1.5	1.5	1.5	1.4	0.3	999.6
165°	1.6	1.6	1.5	1.5	1.5	1.4	1.4	0.2	999.8
170°	1.5	1.5	1.4	1.4	1.4	1.4	1.4	0.1	999.9
175°	1.4	1.4	1.4	1.4	1.5	1.5	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 12	Order number: 51FP22MP4B0Q EAN: 4058352389850	LP number 59059_2
-----------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	22.1	23.8	22.4	24.1	24.4	21.9	23.6	22.3	23.9	24.2
	3H	23.7	25.2	24.0	25.5	25.9	23.4	24.9	23.8	25.2	25.6
	4H	24.3	25.8	24.7	26.1	26.5	23.9	25.4	24.3	25.7	26.1
	6H	24.9	26.2	25.3	26.6	27.0	24.3	25.7	24.7	26.0	26.4
	8H	25.2	26.4	25.6	26.8	27.2	24.5	25.7	24.9	26.1	26.5
	12H	25.3	26.5	25.8	26.9	27.3	24.5	25.7	24.9	26.1	26.5
4H	2H	22.8	24.2	23.1	24.5	24.9	22.6	24.1	23.0	24.4	24.8
	3H	24.5	25.8	24.9	26.1	26.5	24.3	25.5	24.7	25.9	26.3
	4H	25.3	26.4	25.8	26.8	27.3	25.0	26.1	25.4	26.5	26.9
	6H	26.0	27.0	26.5	27.4	27.9	25.4	26.4	25.9	26.8	27.3
	8H	26.3	27.2	26.8	27.6	28.1	25.6	26.5	26.1	26.9	27.4
	12H	26.6	27.4	27.1	27.8	28.3	25.7	26.5	26.2	26.9	27.4
8H	4H	25.6	26.5	26.1	27.0	27.4	25.3	26.2	25.8	26.6	27.1
	6H	26.5	27.2	26.9	27.7	28.2	25.9	26.7	26.4	27.1	27.6
	8H	26.8	27.5	27.3	28.0	28.5	26.1	26.8	26.6	27.3	27.8
	12H	27.2	27.7	27.7	28.2	28.8	26.3	26.8	26.8	27.3	27.9
12H	4H	25.7	26.5	26.2	26.9	27.4	25.4	26.2	25.9	26.6	27.1
	6H	26.5	27.2	27.0	27.7	28.2	26.0	26.7	26.5	27.1	27.7
	8H	26.9	27.5	27.5	28.0	28.5	26.3	26.8	26.8	27.3	27.9

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1590	H(C0) = 21	H(C180) = 21
			B = 87	H(C90) = 21	H(C270) = 21

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		18970.0	18874.7	18857.7	18956.6	19377.5	20110.3	21343.6	
50°		17806.8	17691.6	17716.2	17800.2	18191.0	18914.7	20281.4	
55°		16715.0	16585.4	16636.0	16694.5	17053.9	17775.0	19276.7	
60°		15614.7	15497.3	15542.9	15603.0	15942.6	16638.1	18230.3	
65°		14497.1	14381.7	14404.1	14462.9	14808.9	15477.7	17117.8	
70°		13262.2	13165.5	13086.7	13157.3	13473.1	14113.6	15806.9	
75°		11820.4	11724.4	11551.5	11558.3	11769.3	12338.3	14045.0	
80°		10132.2	9961.8	9773.8	9557.9	9564.6	9864.8	11439.2	
85°		8510.6	8289.4	7974.5	7535.6	7066.5	6700.4	7599.5	


Photometric test report

Family Monsun® 12	Order number: 51FP22MP4B0Q EAN: 4058352389850	LP number 59059_2
------------------------------------	--	------------------------------------



Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

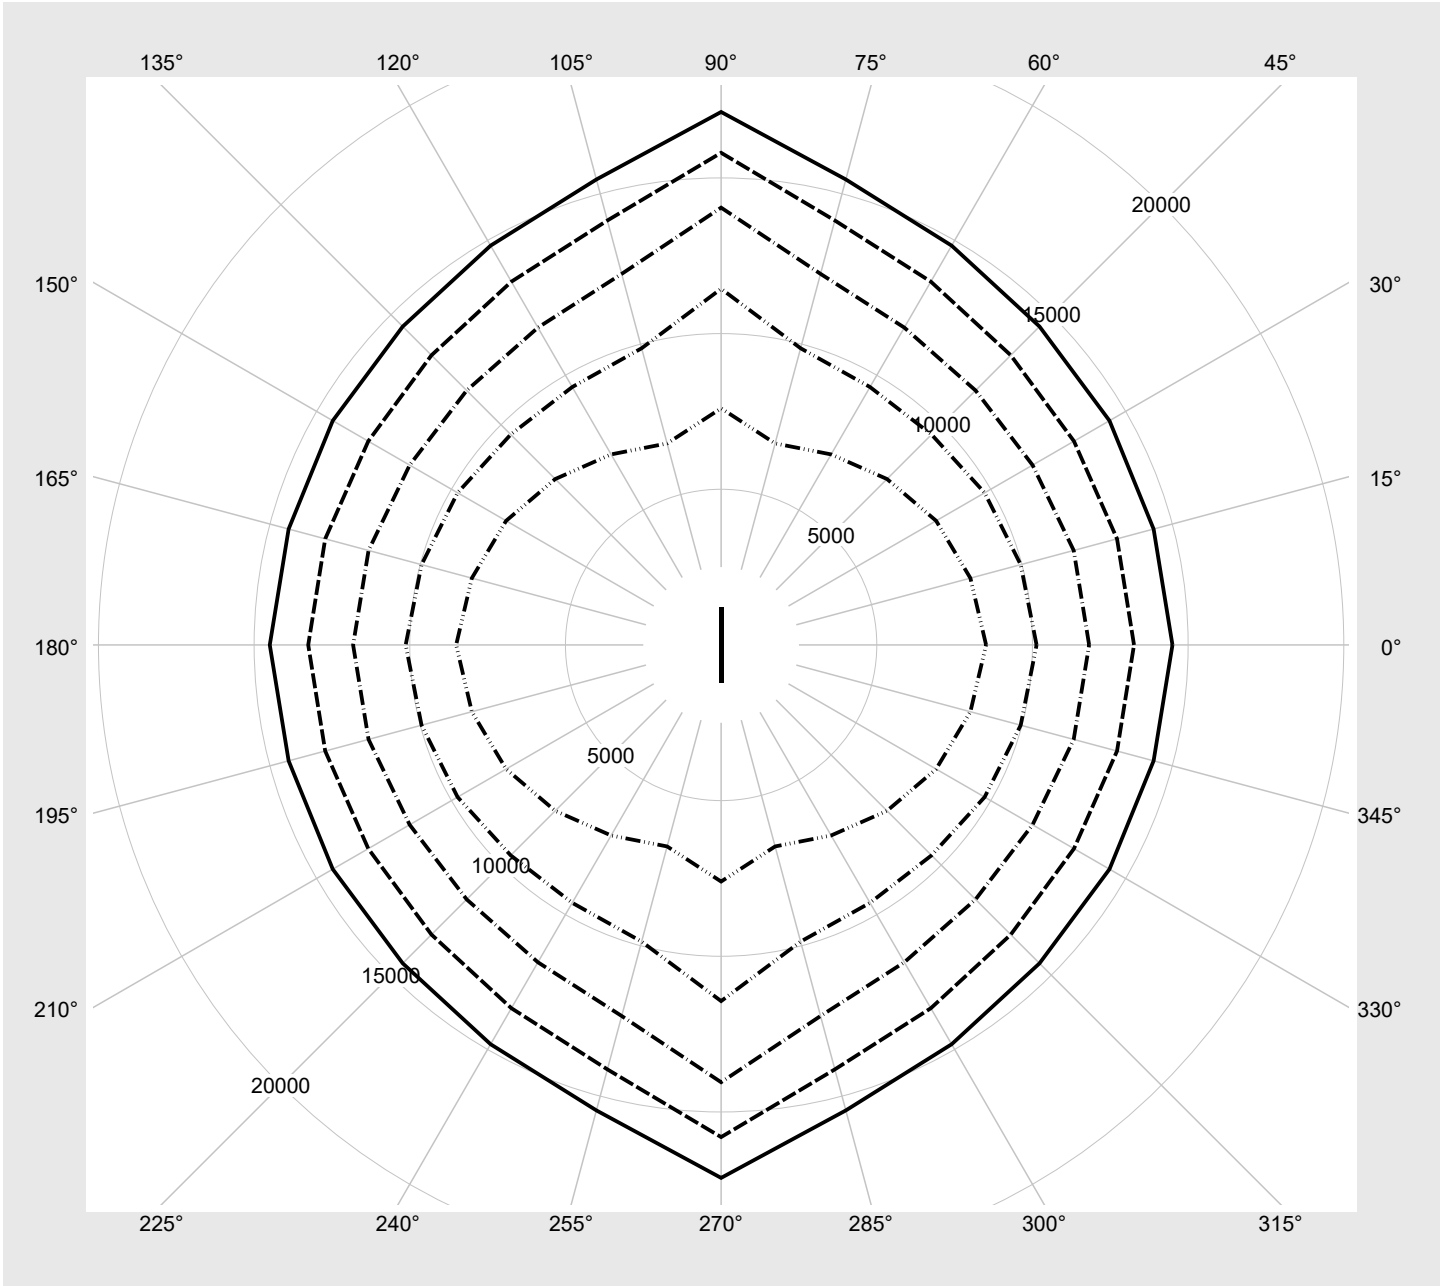

Photometric test report

Family Monsun® 12	Order number: 51FP22MP4B0Q EAN: 4058352389850	LP number 59059_2
-----------------------------	--	-----------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]
	1	2	3		
1	A	C	E	10520	66.2
2	A	C	F	9940	62.3
3	A	D	E	9420	58.8
4	A	D	F	8960	55.8
5	B	C	E	8430	52.3
6	B	C	F	7970	49.4
7	B	D	E	7570	46.8
8	B	D	F	7030	43.4