


# Photometric test report

<b>Family</b> Ecopack® 31	<b>Order number: 51LJ12MKM40A + 59LJ203</b> <b>EAN: 4058352589564 + 4058352612422</b>	<b>LP number</b> 59348_5
<b>Version</b>	diffuser optic, frosted, polycarbonate, adjustable color temperature: 3000K   4000K   5000K, extremely wide distribution, emergency light element 3h operating duration	<b>serial</b> <b>documentation</b> 19.08.2022
<b>Lamps</b>	LED 4000 K   CRI ≥ 80	
<b>Controlgear</b>	ECG Multilumen	
<b>Setting</b>	factory setting: colour temperature 4000K	
<b>Rated values</b>	Net luminous flux = 4900 lm Power consumption = 36.5 W Luminous efficacy = 134.2 lm/W	



**Luminous intensity in cd/klm** C180-0 C270-90 **Imax: 248 cd/klm**

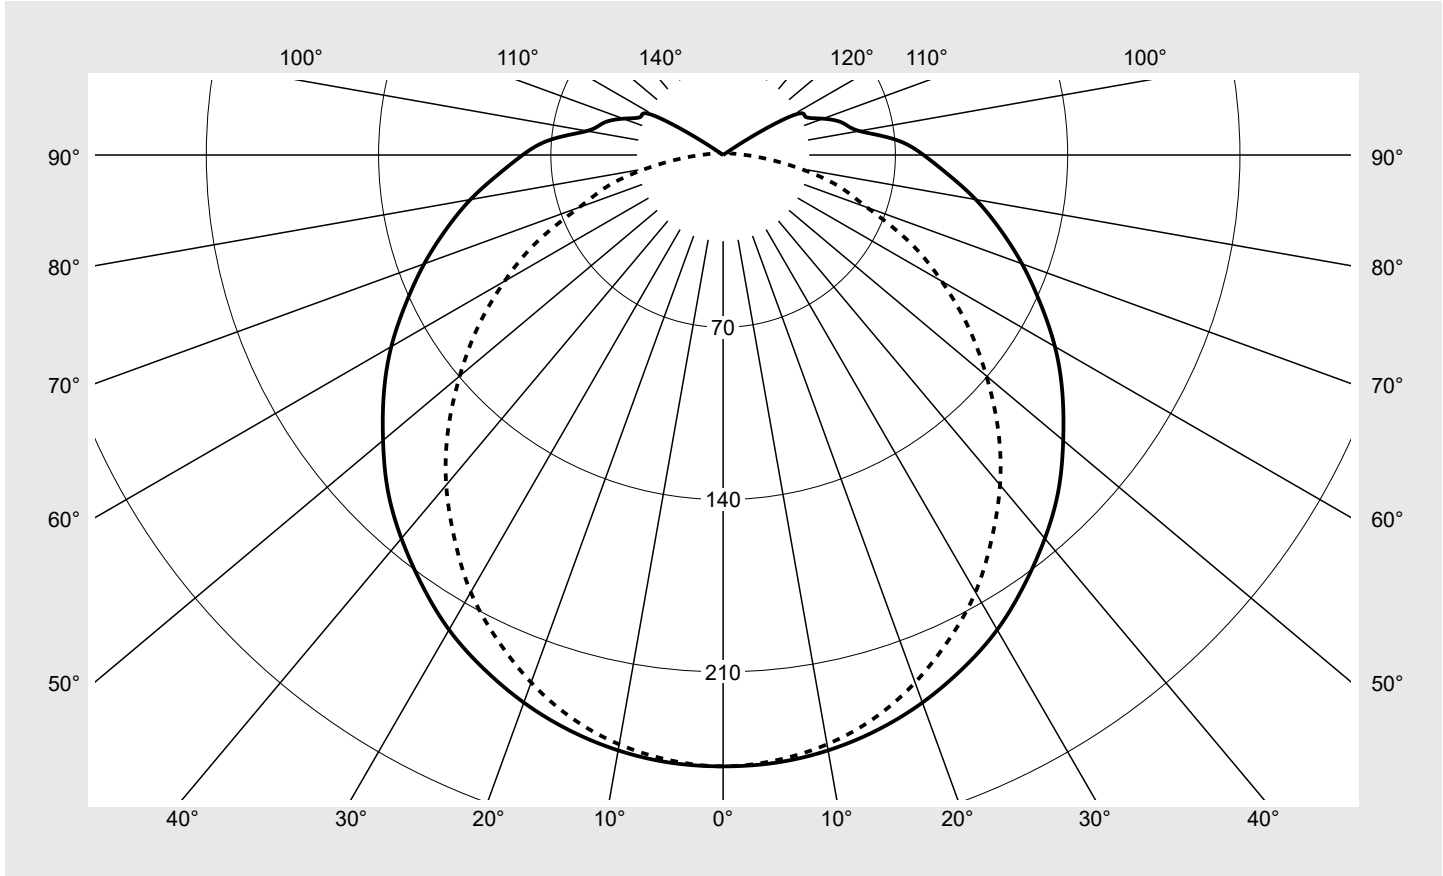

Classifications	
DIN 5040	B 3 1
CIE	N1=39 N2=67 N3=87 N4=89 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	88.8%
$\phi_o$	11.2%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Ecopack® 31</b>	Order number: <b>51LJ12MKM40A + 59LJ203</b> EAN: <b>4058352589564 + 4058352612422</b>	LP number <b>59348_5</b>
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes $\gamma$	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	248.4	248.4	248.4	248.4	248.4	248.4	248.4	1.5	1.5
5°	247.8	248.0	248.2	247.6	247.0	246.9	246.9	11.8	13.3
10°	245.6	246.0	246.3	244.9	243.5	243.3	243.2	23.3	36.6
15°	241.9	242.3	242.7	240.5	238.4	237.7	237.0	34.1	70.7
20°	236.8	237.0	237.1	234.0	230.9	229.5	228.1	43.8	114.5
25°	230.3	230.4	230.5	226.1	221.8	219.5	217.2	52.2	166.7
30°	222.7	222.6	222.5	216.9	211.3	208.2	205.1	59.2	225.8
35°	213.3	213.1	212.8	205.7	198.6	194.5	190.3	64.3	290.1
40°	203.4	202.9	202.5	193.9	185.3	180.1	175.0	67.8	357.8
45°	192.7	192.1	191.5	181.3	171.1	164.6	158.1	69.5	427.3
50°	180.4	179.6	178.8	167.2	155.7	147.7	139.7	69.2	496.6
55°	168.3	167.2	166.2	153.2	140.3	130.9	121.5	67.6	564.1
60°	155.7	154.5	153.3	139.2	125.1	113.8	102.5	64.5	628.6
65°	142.1	141.2	140.3	124.9	109.4	96.4	83.4	60.0	688.6
70°	129.3	128.0	126.8	110.8	94.9	78.6	62.2	54.5	743.1
75°	116.5	115.1	113.8	97.8	81.8	65.0	48.3	49.1	792.2
80°	104.3	102.8	101.4	86.0	70.6	51.1	31.7	43.2	835.4
85°	91.9	90.5	89.2	73.8	58.4	38.0	17.7	36.8	872.2
90°	81.5	79.6	77.8	62.8	47.8	28.4	9.1	31.2	903.4
95°	70.6	66.3	62.0	50.4	38.9	22.1	5.3	25.3	928.7
100°	56.2	54.3	52.5	39.2	26.0	14.7	3.5	19.5	948.1
105°	50.3	48.5	46.6	34.6	22.7	12.9	3.1	16.9	965.1
110°	43.2	41.8	40.4	29.8	19.3	11.1	2.9	14.2	979.3
115°	36.9	35.3	33.8	24.8	15.9	9.4	2.8	11.5	990.8
120°	31.0	29.8	28.6	20.6	12.7	7.7	2.6	9.2	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family <b>Ecopack® 31</b>	Order number: <b>51LJ12MKM40A + 59LJ203</b> EAN: <b>4058352589564 + 4058352612422</b>	LP number <b>59348_5</b>
------------------------------	--	-----------------------------

<b>UGR-Table</b>	<b>Standard room</b>	<b>siteco</b>
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.1	22.9	21.6	23.2	23.7	20.6	22.3	21.0	22.7	23.1
	3H	23.2	24.7	23.6	25.2	25.6	22.3	23.8	22.7	24.2	24.7
	4H	24.2	25.6	24.6	26.1	26.6	23.0	24.4	23.4	24.9	25.3
	6H	25.1	26.4	25.6	26.9	27.5	23.5	24.9	24.0	25.4	25.9
	8H	25.6	26.9	26.1	27.4	27.9	23.8	25.1	24.3	25.6	26.1
12H	26.0	27.2	26.6	27.7	28.3	23.9	25.2	24.4	25.7	26.2	
4H	2H	21.9	23.4	22.4	23.8	24.3	21.5	22.9	21.9	23.4	23.8
	3H	24.2	25.4	24.7	25.9	26.5	23.3	24.6	23.8	25.1	25.6
	4H	25.3	26.5	25.9	27.0	27.6	24.2	25.3	24.7	25.9	26.4
	6H	26.4	27.4	27.0	28.0	28.6	25.0	26.0	25.5	26.5	27.1
	8H	27.0	27.9	27.6	28.5	29.1	25.3	26.3	25.9	26.8	27.4
12H	27.5	28.3	28.1	28.9	29.6	25.5	26.4	26.1	27.0	27.6	
8H	4H	25.8	26.7	26.3	27.3	27.9	24.8	25.7	25.4	26.3	26.9
	6H	27.1	27.9	27.7	28.5	29.2	25.8	26.6	26.4	27.2	27.9
	8H	27.8	28.5	28.4	29.1	29.8	26.3	27.0	26.9	27.6	28.3
	12H	28.5	29.1	29.1	29.7	30.5	26.7	27.3	27.3	27.9	28.7
12H	4H	25.8	26.6	26.4	27.2	27.9	24.9	25.7	25.5	26.3	27.0
	6H	27.2	27.9	27.8	28.6	29.2	26.0	26.7	26.7	27.3	28.0
	8H	28.0	28.6	28.6	29.3	30.0	26.6	27.2	27.2	27.8	28.6


<b>Luminance table</b>	<b>Max. for <math>\gamma \geq 65^\circ</math></b>	<b>Photometric dimensions in mm:</b>	<b>L = 1142</b>	<b>H(C0) = 29</b>	<b>H(C180) = 29</b>
			<b>B = 56</b>	<b>H(C90) = 0</b>	<b>H(C270) = 0</b>

C-planes	$\gamma$	Luminance in cd/m <sup>2</sup>								
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°		
45°		13755.8	13872.8	14321.9	14378.9	14729.5	15727.4	17127.2		
50°		13296.0	13410.7	13886.5	13876.8	14180.9	15177.4	16646.6		
55°		12921.5	13029.7	13531.1	13441.6	13684.2	14679.4	16234.1		
60°		12576.1	12684.1	13220.9	13050.3	13230.4	14153.3	15714.1		
65°		12209.4	12353.0	12967.9	12680.5	12754.4	13578.3	15125.5		
70°		11951.4	12078.5	12723.1	12377.7	12423.0	12864.0	13941.5		
75°		11757.3	11889.4	12600.2	12230.7	12307.7	12834.9	14308.9		
80°		11685.5	11825.7	12626.7	12332.0	12616.2	12813.7	13965.6		
85°		11675.1	11847.8	12796.4	12505.1	12955.3	13200.0	15548.0		

**Photometric test report**

<b>Family</b> <b>Ecopack® 31</b>	<b>Order number: 51LJ12MKM40A + 59LJ203</b> <b>EAN: 4058352589564 + 4058352612422</b>	<b>LP number</b> <b>59348_5</b>
-------------------------------------	--	------------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°   γ 70°   γ 75°   γ 80°   γ 85°     **siteco**

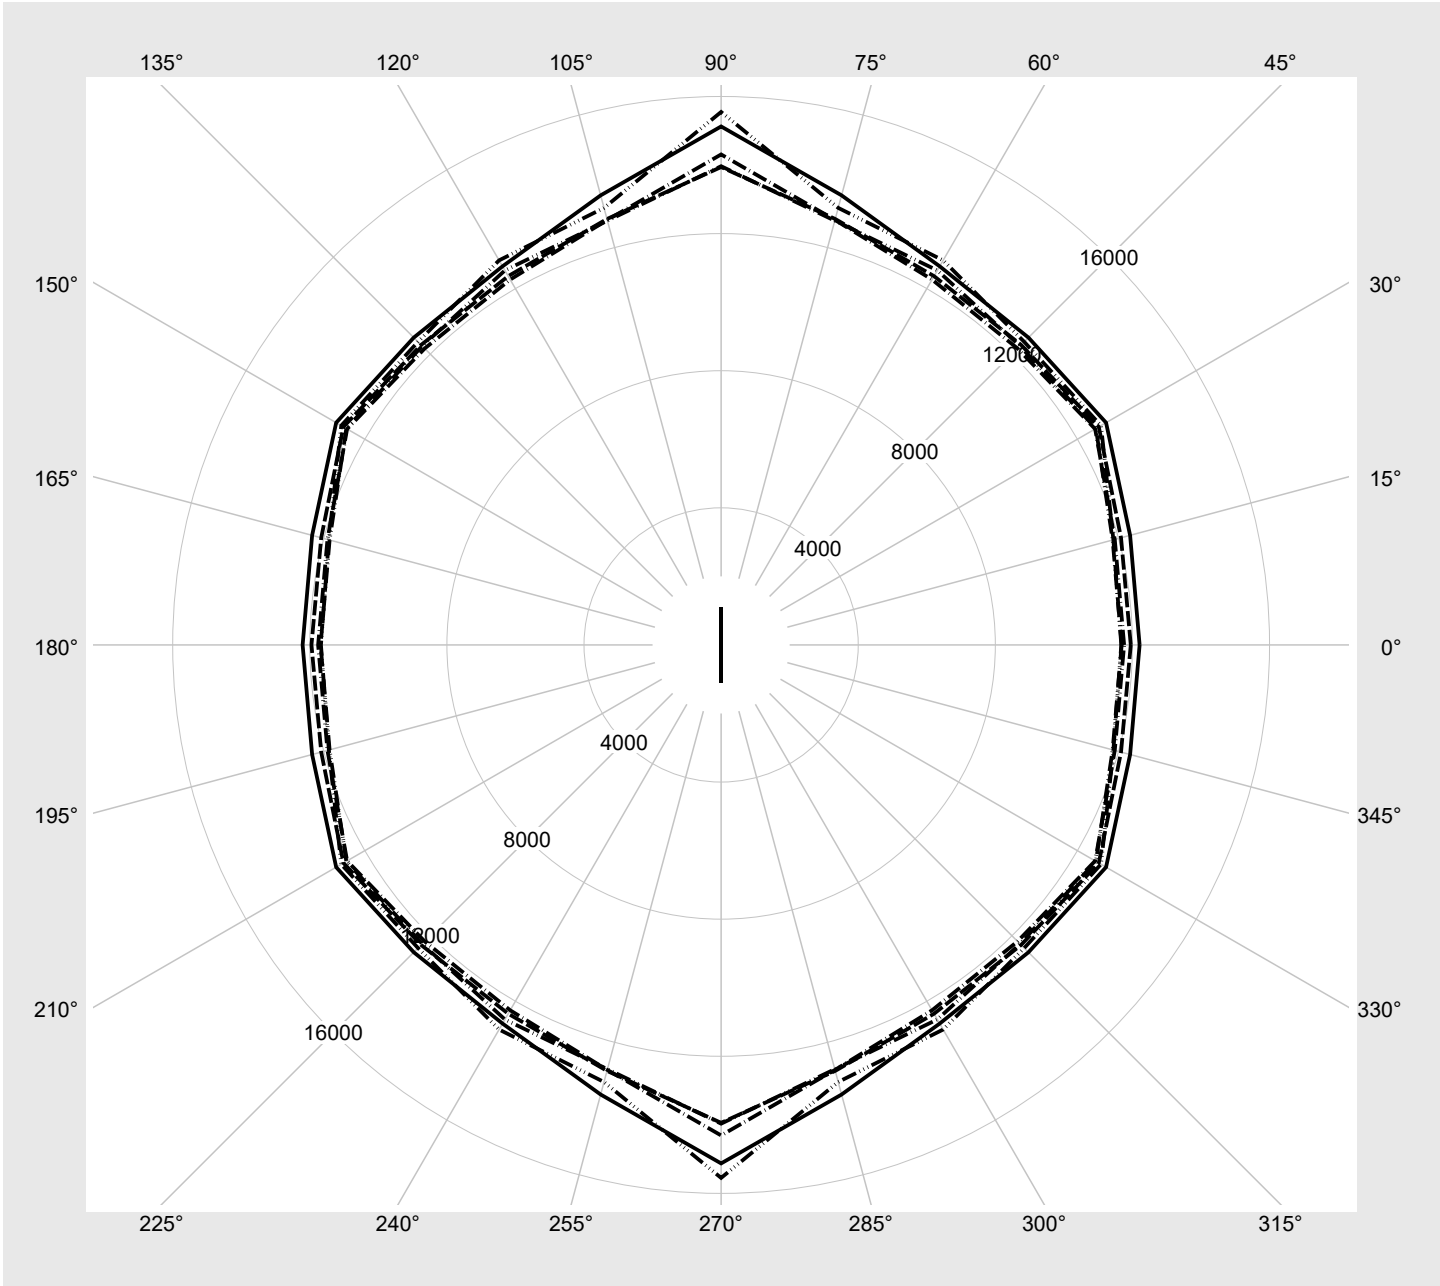

### Photometric test report

Family <b>Ecopack® 31</b>	Order number: <b>51LJ12MKM40A + 59LJ203</b> EAN: <b>4058352589564 + 4058352612422</b>	LP number <b>59348_5</b>
------------------------------	--	-----------------------------

<b>Multilumen Table</b>	environmental temperature: 25°C	<b>sITeco</b>
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting		Luminous flux [lm]	Power consumption [W]
	1	2		
3	ON	ON	4900	36.5
2	ON	OFF	4220	31.5
1	OFF	ON	3510	26.5
0	OFF	OFF	2830	21.5