

Photometric test report

Family
APOLLON® 2

Order number: **51MQ12WD2T12**
EAN: **4058352331903**

LP number
58974_1

serial
documentation
03.08.2020

siteco

Version recessed luminaire for lay-in mounting, square M600, microprismatic optics, $UGR \leq 19$ ($L65 \leq 3000 \text{ cd/m}^2$)

Lamps LED 2700 K ... 6500 K | CRI ≥ 80

Controlgear ECG-DALI


Rated values at 2700 K
Net luminous flux = 4200 lm
Power consumption = 45.0 W
Luminous efficacy = 93.3 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 520 cd/klm

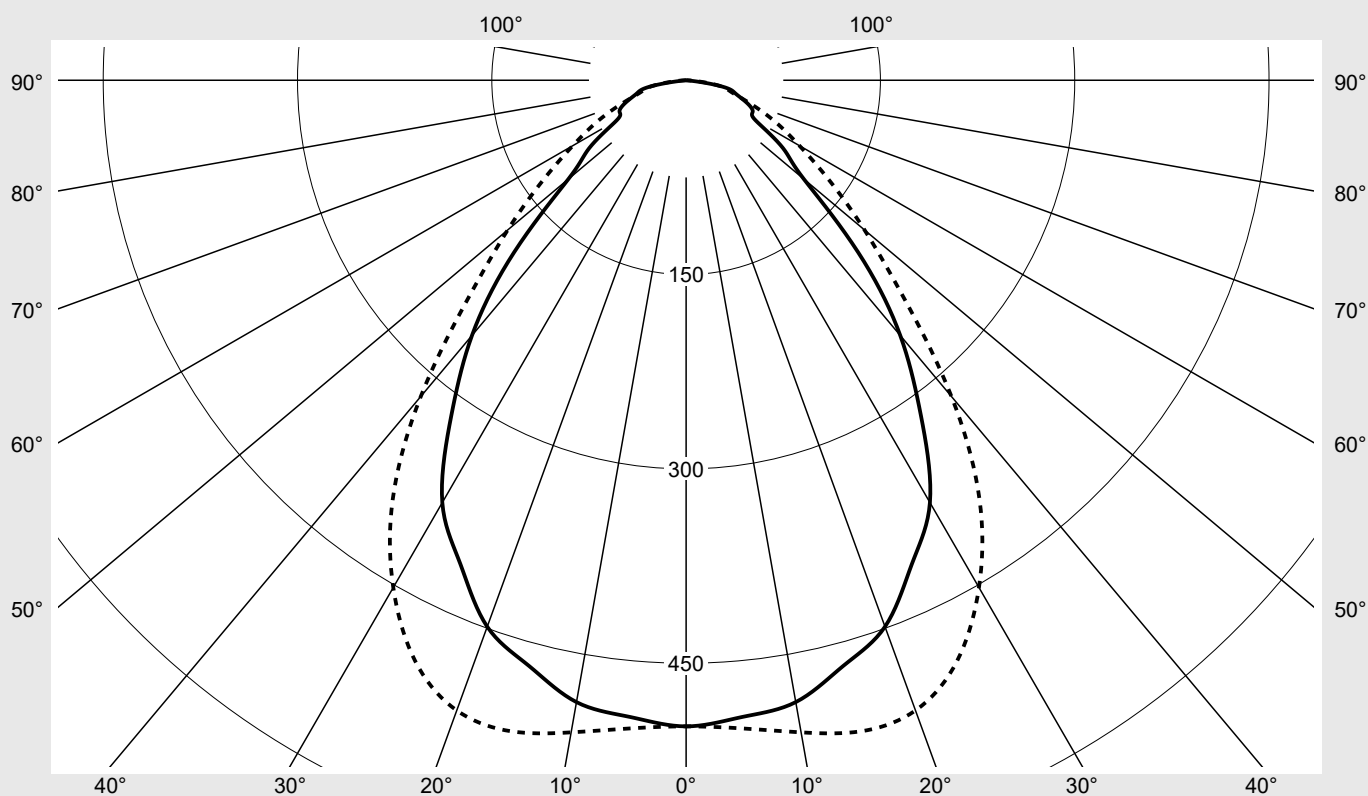

Classifications

DIN 5040 A 5 0
CIE N1=64 N2=88 N3=97
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family APOLLON® 2	Order number: 51MQ12WD2T12 EAN: 4058352331903	LP number 58974_1
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	498.8	498.8	498.8	498.8	498.8	498.8	498.8	3.0	3.0
5°	493.5	493.9	494.9	496.5	498.6	500.6	502.3	23.7	26.7
10°	487.5	488.7	491.7	496.2	501.1	506.4	511.2	47.3	74.1
15°	468.2	471.0	479.7	493.7	503.3	510.6	520.4	69.8	143.9
20°	448.9	452.2	461.5	476.1	498.5	504.4	517.7	89.9	233.7
25°	412.2	417.8	433.5	451.9	468.9	482.1	494.8	104.5	338.3
30°	376.4	381.7	393.0	410.1	424.8	441.9	452.1	112.6	450.9
35°	316.1	323.3	343.9	352.0	369.8	385.7	394.9	111.6	562.5
40°	257.2	260.9	274.3	285.6	293.2	307.1	318.7	100.4	662.9
45°	187.8	198.7	211.4	214.3	210.8	226.4	237.9	82.3	745.2
50°	118.6	139.6	165.8	149.4	137.5	156.6	179.8	62.9	808.1
55°	91.2	109.1	128.1	114.6	94.9	112.8	135.2	50.3	858.4
60°	61.9	85.5	98.2	87.9	65.8	88.5	101.0	40.1	898.6
65°	56.8	70.8	72.4	71.0	57.8	73.2	75.9	34.1	932.6
70°	49.2	58.5	53.3	57.1	50.1	57.9	52.9	28.1	960.8
75°	39.4	42.8	38.5	42.7	39.4	41.3	36.8	21.4	982.2
80°	28.6	27.4	28.0	26.5	26.5	25.2	27.7	14.5	996.8
85°	0.0	0.9	3.9	6.9	10.1	9.5	8.6	3.2	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.4	0.0	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family APOLLON® 2		Order number: 51MQ12WD2T12 EAN: 4058352331903							LP number 58974_1	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
x	y									
2H	2H	15.0	16.6	15.4	16.9	17.2	15.5	17.0	15.8	17.3
	3H	16.2	17.6	16.6	17.9	18.2	16.6	18.0	17.0	18.3
	4H	16.8	18.0	17.2	18.4	18.8	17.1	18.3	17.5	18.7
	6H	17.3	18.5	17.7	18.9	19.3	17.5	18.7	17.9	19.1
	8H	17.5	18.6	17.9	19.0	19.4	17.8	18.8	18.2	19.2
	12H	17.5	18.5	17.9	18.9	19.3	17.8	18.8	18.2	19.2
4H	2H	15.5	16.8	15.9	17.2	17.5	15.9	17.1	16.3	17.5
	3H	16.9	18.0	17.3	18.4	18.8	17.2	18.3	17.6	18.6
	4H	17.6	18.6	18.1	19.0	19.4	17.8	18.8	18.3	19.2
	6H	18.4	19.2	18.8	19.6	20.1	18.4	19.2	18.9	19.7
	8H	18.5	19.3	19.0	19.7	20.2	18.6	19.4	19.1	19.8
	12H	18.6	19.2	19.0	19.7	20.2	18.8	19.4	19.3	19.9
8H	4H	18.0	18.7	18.4	19.2	19.6	18.1	18.9	18.6	19.3
	6H	18.8	19.5	19.3	19.9	20.4	18.9	19.5	19.4	20.0
	8H	19.1	19.6	19.6	20.1	20.6	19.1	19.7	19.6	20.2
	12H	19.1	19.5	19.6	20.0	20.6	19.3	19.8	19.8	20.3
12H	4H	18.0	18.7	18.5	19.1	19.6	18.2	18.8	18.7	19.3
	6H	18.9	19.4	19.4	19.9	20.5	19.0	19.5	19.5	20.0
	8H	19.2	19.6	19.7	20.1	20.6	19.3	19.7	19.8	20.2

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 550 B = 550	
C-planes	γ	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°
			Luminance in cd/m²				
45°	50°	55°	60°				
65°	70°	75°	80°				
85°							

Photometric test report

Family
APOLLON® 2

Order number: **51MQ12WD2T12**
EAN: **4058352331903**

LP number
58974_1

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

