

Photometric test report

Family
Apollon® 21

Order number: 51MQ14WD2312
EAN: 4058352490518

LP number
59191_2



Version recessed luminaire for lay-in mounting, linear, wide distribution, UGR≤19 ($L65 \leq 3000 \text{cd/m}^2$)

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 3800 lm
Power consumption = 33.0 W
Luminous efficacy = 115.2 lm/W

serial
documentation
30.07.2021


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 428 cd/klm

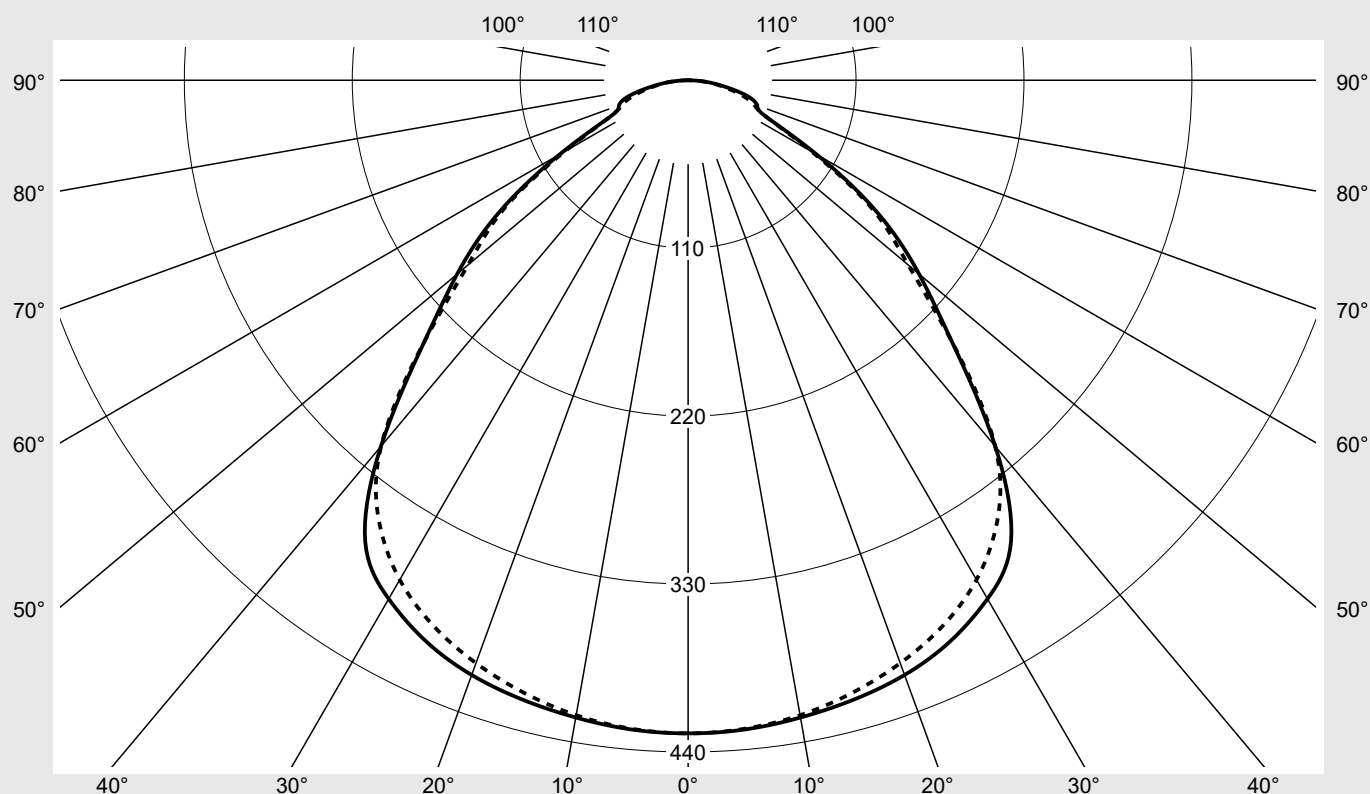

Classifications

DIN 5040 A 5 0
CIE N1=60 N2=89 N3=97
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Apollon® 21	Order number: 51MQ14WD2312 EAN: 4058352490518	LP number 59191_2
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm							Luminous flux in lm/klm		
0°	427.8	427.8	427.8	427.8	427.8	427.8	427.8	2.6	2.6
5°	426.9	426.5	426.3	426.2	426.2	426.2	426.4	20.4	22.9
10°	423.9	423.6	423.1	422.4	422.1	422.1	422.3	40.2	63.2
15°	419.9	419.2	418.2	416.9	415.9	415.4	415.4	59.2	122.4
20°	414.5	413.1	411.3	409.1	407.6	406.7	406.3	76.8	199.2
25°	405.7	403.7	401.2	398.1	396.1	394.9	394.5	92.4	291.6
30°	392.2	389.6	386.3	382.2	379.9	378.4	377.8	105.1	396.7
35°	368.8	365.8	362.4	358.4	356.2	354.4	352.9	113.1	509.8
40°	313.0	312.4	311.9	311.7	314.0	314.4	312.9	110.2	620.1
45°	246.3	246.6	246.4	245.9	250.2	250.5	246.8	96.0	716.1
50°	197.5	194.2	190.7	189.5	193.4	193.0	188.2	80.7	796.8
55°	151.7	147.7	142.8	142.7	147.3	149.0	147.9	65.8	862.6
60°	97.2	96.7	96.1	95.4	94.8	94.1	93.5	45.3	907.9
65°	56.1	56.7	57.3	57.9	57.3	56.7	56.1	28.3	936.2
70°	48.2	47.8	47.4	48.0	47.4	46.5	45.6	24.4	960.6
75°	40.3	39.0	37.5	38.1	37.6	36.3	35.1	20.0	980.5
80°	24.7	23.9	22.9	23.4	26.1	25.7	22.3	13.1	993.6
85°	11.4	11.4	11.4	11.4	11.4	11.4	11.4	6.2	999.8
90°	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.2	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Apollon® 21	Order number: 51MQ14WD2312 EAN: 4058352490518	LP number 59191_2
------------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	15.8	17.3	16.1	17.7	18.0	15.7	17.3	16.1	17.6	17.9
	3H	16.4	17.8	16.8	18.1	18.5	16.3	17.7	16.7	18.0	18.4
	4H	16.8	18.1	17.2	18.5	18.8	16.7	18.0	17.1	18.3	18.7
	6H	17.2	18.4	17.6	18.8	19.1	17.0	18.2	17.4	18.6	19.0
	8H	17.4	18.5	17.8	18.8	19.3	17.2	18.3	17.6	18.7	19.1
	12H	17.5	18.5	17.9	18.9	19.3	17.3	18.3	17.7	18.7	19.1
4H	2H	16.1	17.4	16.5	17.7	18.1	16.0	17.3	16.4	17.7	18.1
	3H	16.9	18.0	17.3	18.3	18.8	16.8	17.9	17.2	18.3	18.7
	4H	17.4	18.4	17.9	18.8	19.3	17.3	18.3	17.8	18.7	19.1
	6H	18.0	18.8	18.4	19.2	19.7	17.8	18.7	18.3	19.1	19.6
	8H	18.2	18.9	18.6	19.4	19.9	18.0	18.8	18.5	19.3	19.7
	12H	18.3	19.0	18.8	19.5	20.0	18.2	18.9	18.7	19.3	19.8
8H	4H	17.7	18.4	18.1	18.9	19.4	17.6	18.3	18.0	18.8	19.3
	6H	18.3	18.9	18.8	19.4	19.9	18.2	18.9	18.7	19.3	19.8
	8H	18.6	19.1	19.1	19.6	20.1	18.5	19.1	19.0	19.6	20.1
	12H	18.8	19.3	19.3	19.8	20.3	18.8	19.2	19.3	19.7	20.3
12H	4H	17.7	18.4	18.2	18.9	19.3	17.6	18.3	18.1	18.7	19.2
	6H	18.4	18.9	18.9	19.4	19.9	18.3	18.9	18.8	19.3	19.9
	8H	18.7	19.2	19.2	19.7	20.2	18.6	19.1	19.2	19.6	20.2

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1198 B = 260
------------------------	---	--------------------------------------	-----------------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		4249.2	4254.0	4251.7	4242.3	4317.3	4322.7	4258.3	
50°		3748.5	3685.7	3619.8	3596.2	3671.1	3663.2	3572.6	
55°		3226.1	3141.8	3038.2	3035.1	3133.0	3170.2	3146.6	
60°		2371.2	2359.7	2344.1	2328.5	2312.6	2297.0	2281.4	
65°		1618.3	1635.6	1652.9	1670.3	1652.9	1635.6	1618.3	
70°		1718.2	1705.9	1690.2	1711.3	1692.0	1657.4	1626.2	
75°		1898.4	1837.9	1767.9	1795.4	1772.8	1709.4	1655.0	
80°		1734.6	1675.6	1612.0	1642.9	1833.9	1809.0	1568.1	
85°		1592.2	1598.5	1597.1	1595.7	1594.3	1592.9	1591.5	

Photometric test report

Family Apollon® 21	Order number: 51MQ14WD2312 EAN: 4058352490518	LP number 59191_2
-------------------------------------	--	------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

