


Photometric test report

Family Mirrortec® LED	Order number: 5NW14093QC + 5XA7682G2H2AC EAN: 4039806568489 + 4058352223710	LP number 58032_10
	Version SMR100A 1200x1200, 3 pcs. single wire suspension, FL20 midi power RS5 Lamps LED 4000 K CRI ≥ 70 Controlgear ECG-DALI Setting individual position: distance floodlight mirror = 3,0m / reflector tilt = 5° Rated values Net luminous flux = 33700 lm Power consumption = 305.7 W Luminous efficacy = 110.2 lm/W	serial documentation 16.12.2020




siteco

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 456 cd/klm**

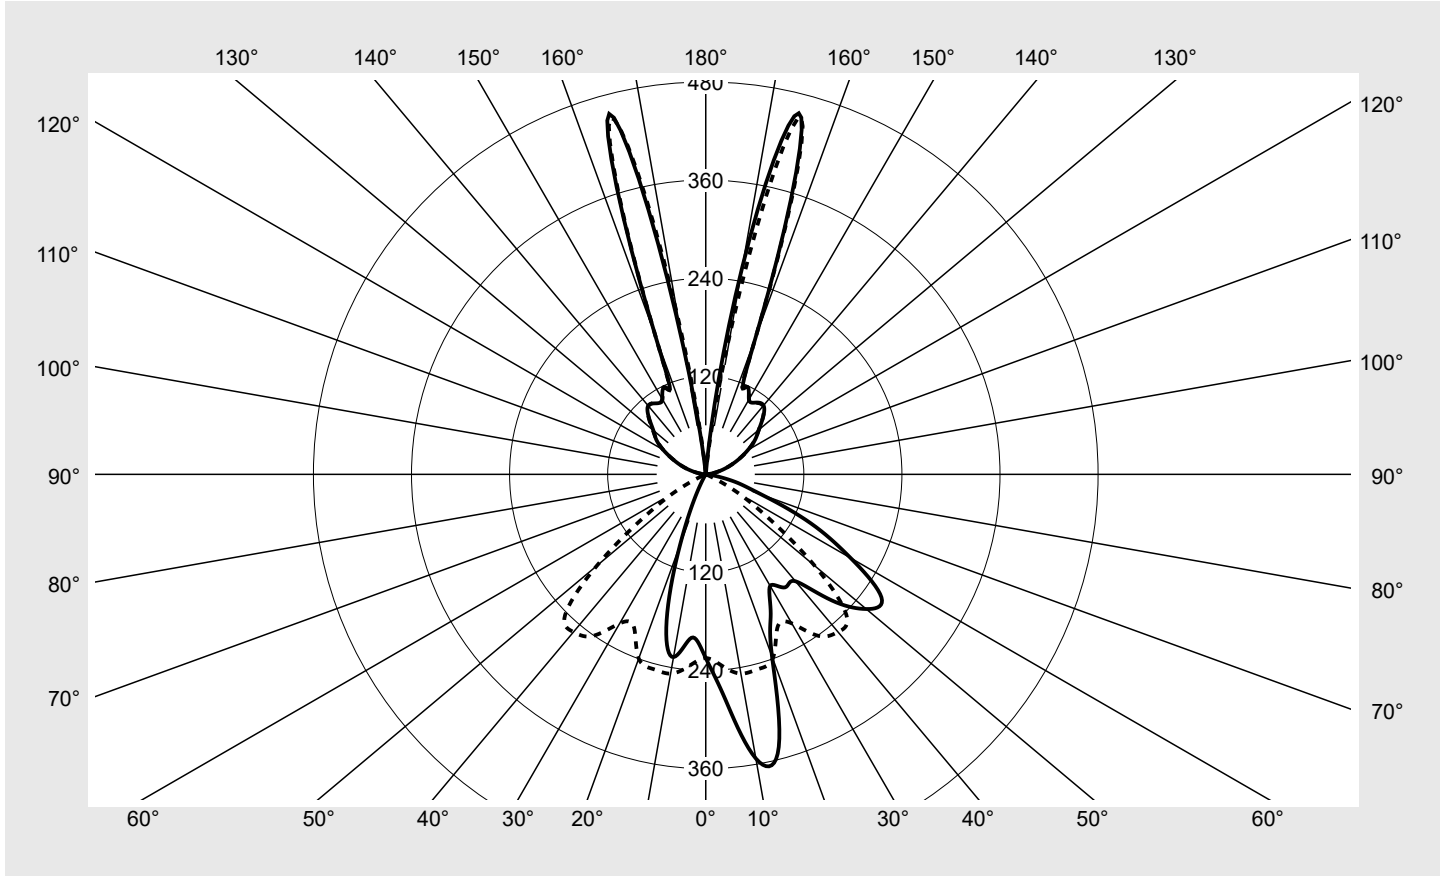

Classifications	
DIN 5040	C 4 3
CIE	N1=47 N2=83 N3=98 N4=58 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	58.3%
ϕ_o	41.7%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Mirrortec® LED	Order number: 5NW14093QC + 5XA7682G2H2AC EAN: 4039806568489 + 4058352223710	LP number 58032_10
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
γ	Luminous intensity in cd/klm						
0°	224.8	224.8	224.8	224.8	224.8	224.8	224.8
5°	276.7	276.2	279.7	281.3	266.2	253.2	235.5
10°	353.0	356.0	325.0	304.4	277.0	244.1	247.5
15°	345.2	347.3	335.4	306.3	264.6	243.3	246.7
20°	237.0	261.4	236.2	233.6	236.7	227.6	239.8
25°	188.1	178.9	195.6	197.7	196.2	211.9	207.2
30°	157.6	164.3	166.9	181.3	181.3	203.8	210.5
35°	168.8	161.9	177.4	189.1	194.2	224.4	241.4
40°	170.7	190.9	196.0	202.7	217.3	255.1	251.7
45°	218.2	215.8	223.9	240.7	265.8	232.7	243.4
50°	256.3	246.7	268.8	295.6	254.2	196.6	174.0
55°	262.4	253.6	320.6	338.4	216.9	134.0	95.2
60°	204.7	229.9	311.7	289.1	145.3	71.9	46.5
65°	141.9	162.2	254.7	213.2	85.5	24.9	10.2
70°	73.4	102.1	159.7	143.4	39.6	7.4	1.0
75°	40.6	53.5	96.6	86.3	11.5	0.7	0.0
80°	14.4	20.2	47.5	40.1	5.1	0.0	0.0
85°	6.2	6.4	22.7	20.4	1.0	0.0	0.0
90°	1.2	3.0	8.1	7.6	0.4	0.2	0.2
95°	3.0	2.8	3.5	2.9	2.8	2.8	2.8
100°	10.2	10.3	10.2	10.1	10.2	10.2	10.2
105°	20.7	20.9	20.7	20.8	20.7	20.7	20.9
110°	32.3	32.3	32.6	32.3	32.3	32.4	32.3
115°	45.5	45.1	45.6	45.5	45.4	45.4	45.3
120°	59.5	59.9	60.3	60.0	60.0	59.5	60.3
125°	73.6	73.0	72.9	73.7	73.5	72.6	73.2
130°	84.8	85.7	85.6	85.4	85.3	85.2	84.7
135°	99.3	98.9	98.4	98.2	98.2	98.2	99.0
140°	110.0	109.1	108.9	108.9	108.7	108.8	109.1
145°	107.2	106.5	106.5	107.1	105.0	106.7	106.8
150°	105.6	106.9	106.8	106.0	106.1	105.8	105.8
155°	118.3	117.5	117.4	118.7	118.1	117.9	118.0
160°	178.7	178.8	180.1	178.8	179.0	178.1	179.1
165°	451.8	452.8	379.7	219.7	371.6	452.9	451.3
170°	257.6	178.1	38.8	0.0	27.2	136.5	189.1
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Mirrortec® LED	Order number: 5NW14093QC + 5XA7682G2H2AC EAN: 4039806568489 + 4058352223710	LP number 58032_10
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	224.8	224.8	224.8	224.8	224.8	224.8	1.3	1.3
5°	225.9	222.2	215.4	216.6	212.8	200.7	11.6	13.0
10°	232.3	225.2	230.6	223.0	221.0	227.0	25.2	38.2
15°	255.1	257.8	228.0	207.5	188.7	184.9	37.2	75.4
20°	258.1	260.1	213.7	149.3	113.1	92.1	40.5	115.9
25°	251.3	218.0	136.5	74.4	38.4	30.1	38.9	154.8
30°	223.4	158.2	75.1	21.7	7.6	4.3	38.3	193.0
35°	219.5	113.0	24.5	1.6	0.2	0.1	42.8	235.8
40°	207.1	67.7	9.7	1.1	0.0	0.0	49.5	285.3
45°	182.7	35.7	5.8	2.7	1.5	0.5	56.9	342.1
50°	111.6	12.5	0.5	0.1	0.1	0.0	59.1	401.2
55°	54.9	3.3	0.0	0.1	0.0	0.0	57.9	459.1
60°	23.7	0.5	0.0	0.0	0.0	0.0	48.3	507.4
65°	6.1	0.1	0.0	0.0	0.3	0.0	34.3	541.7
70°	0.7	0.0	0.0	0.0	0.1	0.0	21.1	562.8
75°	0.0	0.0	0.0	0.0	0.0	0.0	11.9	574.6
80°	0.0	0.0	0.0	0.0	0.0	0.0	5.4	580.0
85°	0.0	0.0	0.0	0.0	0.0	0.0	2.4	582.5
90°	0.2	0.2	0.2	0.2	0.2	0.2	1.0	583.4
95°	2.8	2.8	2.8	2.8	2.8	2.8	1.6	585.0
100°	10.1	10.2	10.2	10.2	10.3	10.3	5.5	590.5
105°	20.7	20.7	20.7	20.8	20.8	20.7	11.0	601.5
110°	32.6	32.4	32.4	32.4	32.3	32.7	16.7	618.2
115°	45.7	45.1	45.2	45.3	45.5	45.3	22.5	640.8
120°	59.9	60.0	59.8	59.9	60.1	60.2	28.5	669.2
125°	73.5	73.4	73.9	72.9	73.3	73.8	32.9	702.1
130°	85.8	85.4	84.4	85.6	85.1	83.7	35.8	737.9
135°	99.0	98.8	98.7	98.5	98.8	98.5	38.2	776.1
140°	108.4	108.5	108.4	109.0	109.0	109.6	38.4	814.5
145°	106.7	105.9	106.7	106.6	107.5	106.1	33.5	848.0
150°	106.2	106.7	105.5	106.4	106.8	106.7	29.1	877.1
155°	118.3	117.5	118.8	117.7	117.7	116.5	27.3	904.4
160°	178.5	179.5	179.4	179.8	180.0	179.6	33.6	938.0
165°	455.4	348.2	176.9	341.0	448.4	456.5	53.8	991.8
170°	117.5	18.4	0.0	14.6	101.5	161.2	8.2	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Mirrortec® LED	Order number: 5NW14093QC + 5XA7682G2H2AC EAN: 4039806568489 + 4058352223710	LP number 58032_10
UGR-Table		Standard room

siteco

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	21.3	22.3	22.1	23.1	24.2	15.6	16.7	16.5	17.5	18.6
	3H	22.9	23.9	23.6	24.7	25.6	16.2	17.2	17.0	18.0	18.9
	4H	22.2	23.1	23.1	23.9	25.1	15.3	16.2	16.2	17.0	18.2
	6H	22.3	23.1	23.2	24.0	25.1	15.3	16.1	16.2	17.0	18.1
	8H	22.1	22.8	23.0	23.7	24.9	15.1	15.8	16.0	16.7	17.9
	12H	22.1	22.8	23.0	23.7	24.9	15.1	15.8	16.0	16.7	17.9
4H	2H	22.2	23.0	23.0	23.9	25.0	17.6	18.4	18.4	19.3	20.4
	3H	23.4	24.1	24.3	25.0	26.2	17.5	18.2	18.4	19.2	20.3
	4H	23.7	24.3	24.6	25.2	26.4	17.4	18.1	18.3	19.0	20.1
	6H	23.8	24.3	24.7	25.3	26.4	17.4	18.0	18.3	18.9	20.1
	8H	23.6	24.1	24.5	25.0	26.2	17.2	17.7	18.2	18.7	19.9
	12H	23.7	24.1	24.6	25.1	26.3	17.3	17.7	18.2	18.7	19.9
8H	4H	23.7	24.2	24.7	25.2	26.4	18.1	18.6	19.0	19.5	20.7
	6H	23.9	24.3	24.9	25.3	26.5	18.0	18.4	19.0	19.4	20.6
	8H	23.9	24.3	24.9	25.3	26.5	18.0	18.3	18.9	19.3	20.5
	12H	24.0	24.3	25.0	25.3	26.5	18.0	18.3	19.0	19.3	20.5
12H	4H	23.8	24.3	24.8	25.2	26.4	18.3	18.7	19.2	19.6	20.8
	6H	24.0	24.4	25.0	25.3	26.6	18.3	18.6	19.2	19.6	20.8
	8H	24.1	24.4	25.1	25.4	26.6	18.2	18.5	19.2	19.5	20.7

Luminance table	Max. for $\gamma \geq 65^\circ$												
	Photometric dimensions in mm:										L = 1200 B = 1200		
C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°
γ	Luminance in cd/m ²												
45°	7220.8	7143.7	7411.9	7964.7	8796.9	7703.0	8055.1	6047.0	1181.7	193.1	88.8	49.9	17.7
50°	9332.1	8981.2	9786.6	10761.7	9256.7	7156.8	6333.9	4061.7	454.3	19.6	4.5	3.6	0.0
55°	10707.4	10347.1	13080.9	13805.7	8848.9	5466.4	3885.6	2240.3	134.8	0.0	6.0	0.0	0.0
60°	9579.5	10759.1	14589.6	13529.9	6799.3	3363.0	2175.3	1110.4	22.0	0.6	0.0	0.0	0.0
65°	7860.1	8982.0	14104.7	11804.7	4732.2	1376.6	563.9	340.1	4.5	0.7	0.0	18.1	0.0
70°	5020.8	6985.0	10930.8	9814.7	2706.3	507.5	69.1	45.4	0.0	0.0	0.0	5.0	0.0
75°	3674.4	4834.7	8739.0	7807.0	1038.3	64.0	0.0	3.6	0.0	0.0	0.0	0.0	0.0
80°	1941.5	2725.9	6398.3	5408.4	683.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
85°	1665.9	1719.8	6096.9	5473.2	267.4	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Mirrortec® LED	Order number: 5NW14093QC + 5XA7682G2H2AC EAN: 4039806568489 + 4058352223710	LP number 58032_10
--	--	-------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

