

Photometric test report

Family
Floodlight 20 midi LED

Order number: **5XA7681D2D1AC**
EAN: **4058352222300**

LP number
58577_4



Version	mounting bracket
Optic	asymmetric distribution PL52
Cover	toughened safety glass
Lamps	1 x LED 4000K / CRI ≥ 70 (unbekannt LED 4000K / CRI = 70)
Controlgear	ECG
Rated values	Net luminous flux = 17990 lm Power consumption = 142.0 W Luminous efficacy = 126.7 lm/W

serial
documentation
25.08.2021

siteco

Luminous intensity in cd/klm


C180-0

C215-35

C220-40

C270-90

Imax: 827 cd/klm

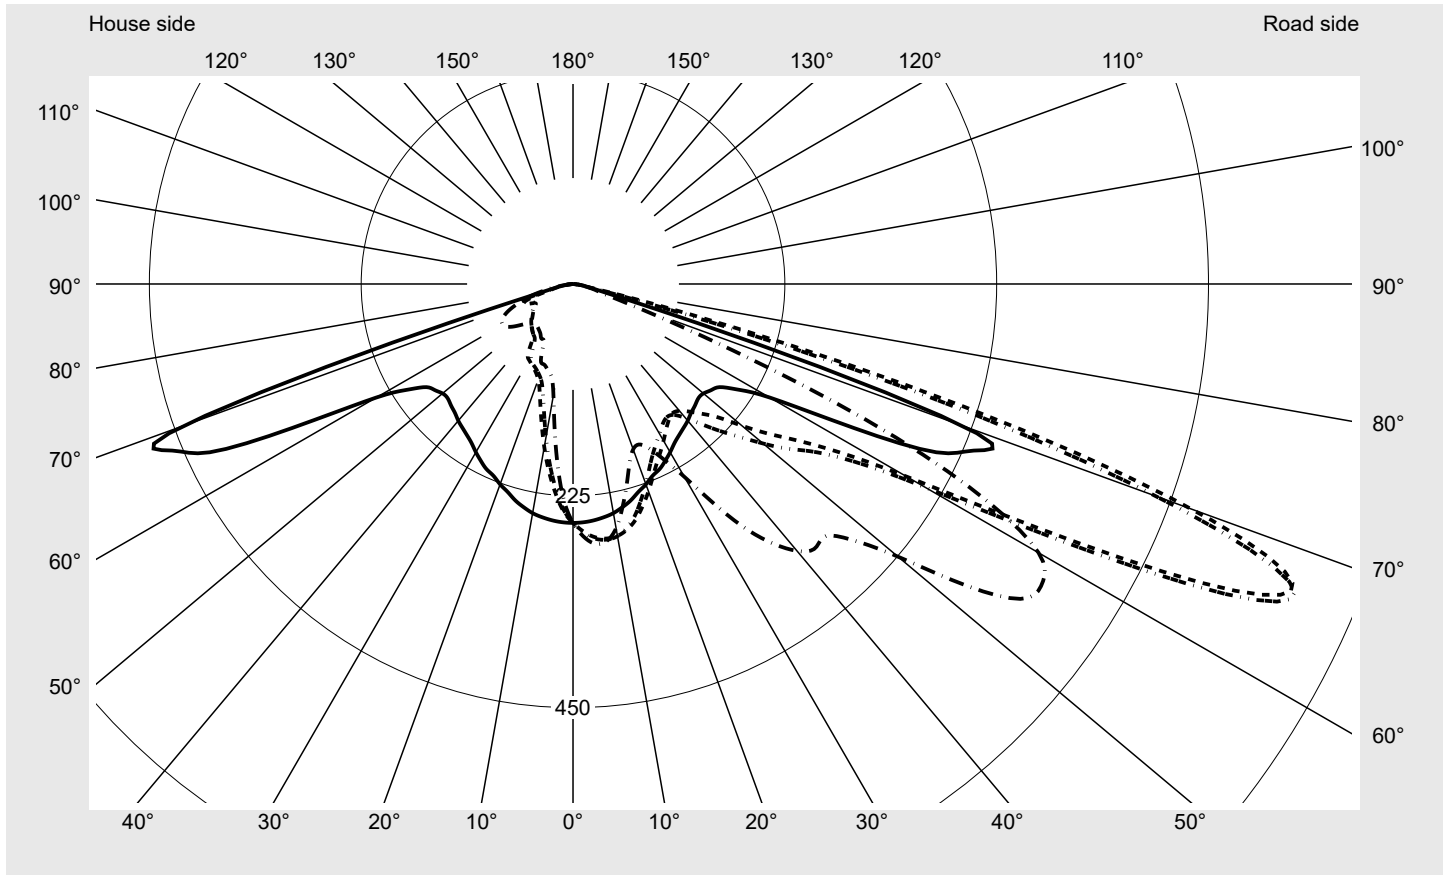

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	767.0
Imax 80°	23.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7681D2D1AC EAN: 4058352222300	LP number 58577_4
--	---	------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°**

