

## Photometric test report

**Family**  
Floodlight 20 midi LED

**Order number: 5XA7682D1A4AC**  
**EAN: 4058352222416**

**LP number**  
**58576\_3**



**Version** mast flange adapter  
**Optic** asymmetric distribution PL43  
**Cover** toughened safety glass  
**Lamps** 1 x LED 3000K / CRI ≥ 80  
 (unbekannt LED 3000K / CRI = 80)  
**Controlgear** ECG-DALI  
**Rated values** Net luminous flux = 14980 lm  
 Power consumption = 142.0 W  
 Luminous efficacy = 105.5 lm/W

**serial**  
**documentation**  
25.08.2021

siteco

**Luminous intensity in cd/klm**


**C180-0**

**C230-50**

**C235-55**

**C270-90**

**Imax: 733 cd/klm**

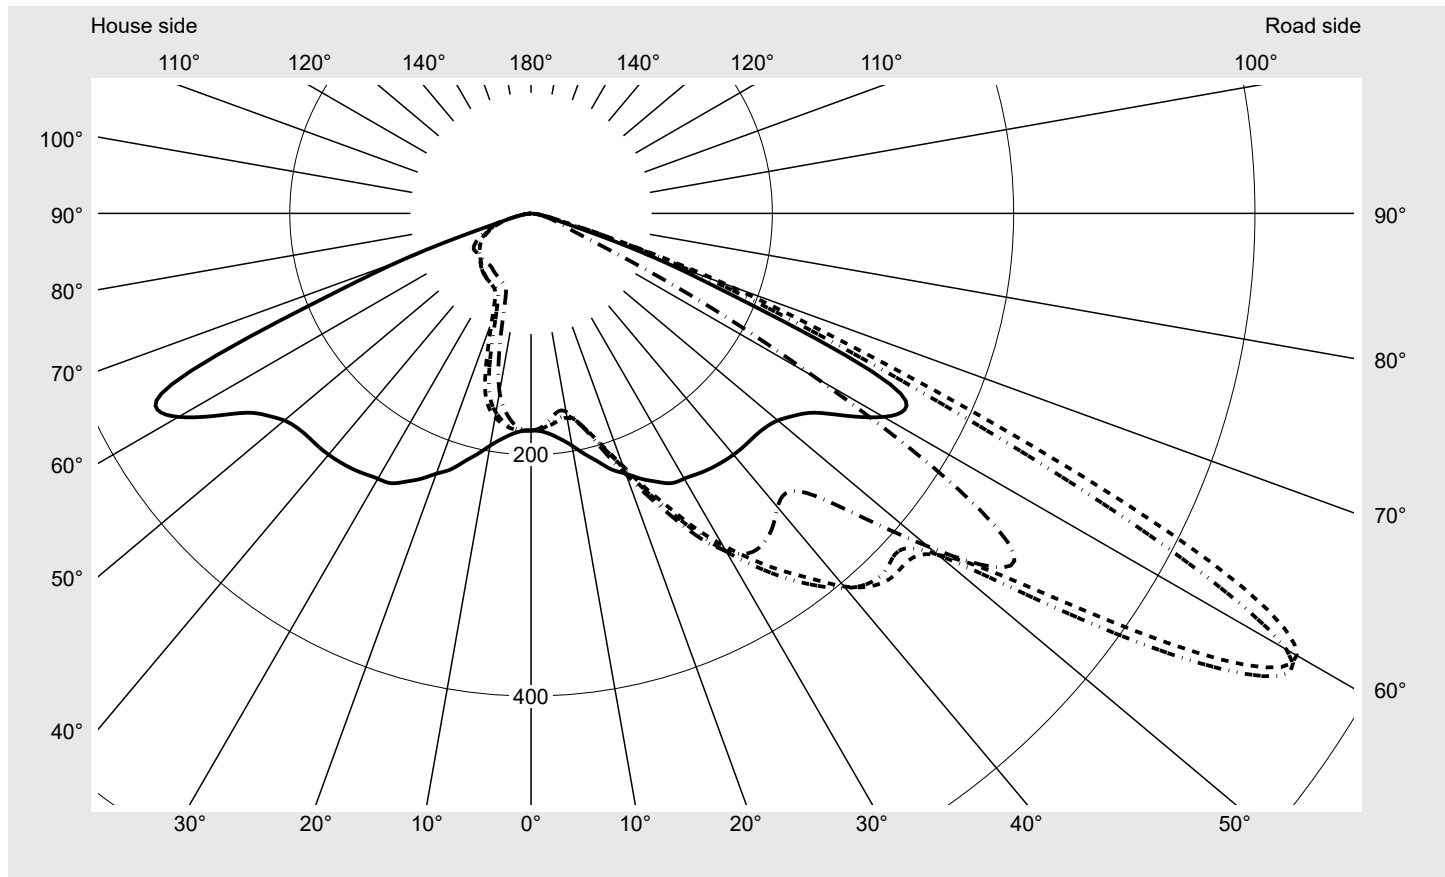

### Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

### Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	250.7
Imax 80°	13.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

### Measurement conditions


DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>Floodlight 20 midi LED</b>	<b>Order number: 5XA7682D1A4AC</b> <b>EAN: 4058352222416</b>	<b>LP number</b> <b>58576_3</b>
--	---	------------------------------------



**Envelope curve in cd/klm**      **KMK 60°**      **KMK 57.5°**      **KMK 55°**      **KMK 52.5°**

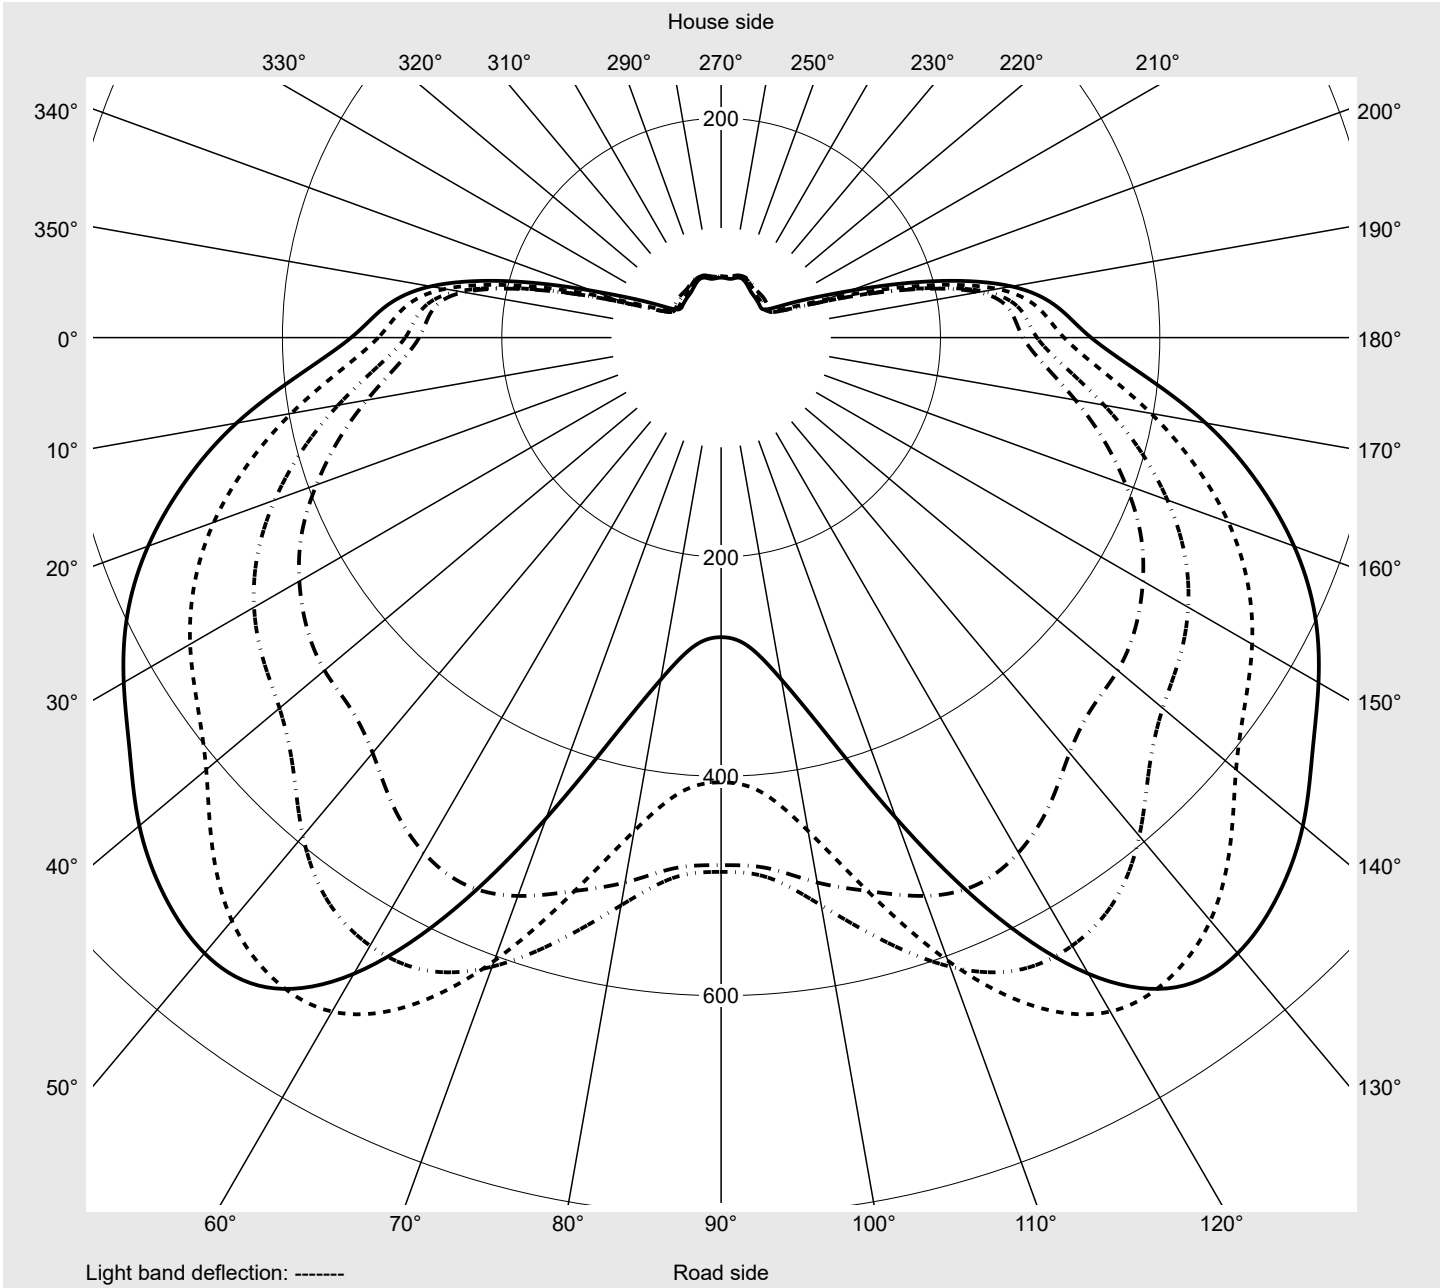

## Photometric test report

<b>Family</b> Floodlight 20 midi LED	<b>Order number: 5XA7682D1A4AC</b> <b>EAN: 4058352222416</b>	<b>LP number</b> 58576_3
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9
2,5°	180.7	180.4	180.3	180.3	180.2	180.2	180.1	179.9	179.6	179.4	179.2	178.9	178.7
5,0°	183.7	183.4	182.9	182.4	181.8	181.2	180.4	179.5	178.5	177.5	176.6	175.7	174.9
7,5°	188.8	188.0	186.9	185.6	184.1	182.6	180.9	179.0	177.0	175.1	173.3	171.8	170.3
10,0°	195.5	194.5	192.6	190.3	187.8	185.1	182.2	179.4	176.6	174.2	172.1	170.5	169.2
12,5°	204.2	202.3	199.5	196.0	192.4	188.8	185.5	182.6	180.2	178.5	177.4	176.7	176.5
15,0°	212.7	210.5	206.6	202.2	198.1	194.5	191.7	189.8	188.7	188.2	188.6	189.0	189.2
17,5°	222.6	218.8	214.2	209.6	205.7	202.9	201.4	201.1	202.0	203.2	204.3	205.5	206.5
20,0°	229.6	226.1	221.4	216.9	213.9	212.6	213.3	215.5	217.8	220.3	222.9	225.1	227.0
22,5°	238.0	233.6	228.9	225.2	223.5	224.4	228.1	232.3	236.6	241.1	245.4	249.1	250.8
25,0°	245.3	242.0	238.0	235.4	235.1	238.8	244.2	250.4	256.6	262.6	267.9	272.3	275.4
27,5°	252.1	248.7	246.0	245.2	248.7	255.8	263.3	271.1	278.8	286.6	293.6	298.6	302.1
30,0°	253.9	252.1	250.7	252.4	259.9	269.9	280.3	290.3	299.9	309.1	317.3	323.8	328.0
32,5°	256.1	255.0	255.6	260.4	271.1	283.3	295.9	308.4	320.0	330.1	339.6	347.2	351.5
35,0°	258.4	258.8	262.3	270.7	283.3	297.5	311.7	325.9	339.5	351.0	361.1	369.2	372.1
37,5°	259.9	262.2	269.2	281.6	295.7	311.3	327.3	343.0	358.0	371.4	381.6	388.9	388.5
40,0°	261.1	265.5	276.9	292.5	308.5	325.7	343.7	361.7	378.1	393.0	403.6	405.4	400.4
42,5°	261.5	268.2	284.0	302.1	321.0	340.5	360.0	379.7	396.9	411.3	418.8	415.4	406.2
45,0°	261.6	270.9	290.5	311.6	332.9	354.4	376.5	396.4	412.8	424.4	424.9	416.8	401.9
47,5°	263.0	275.1	297.2	320.8	344.1	366.4	387.2	405.7	419.4	427.7	425.2	413.8	401.7
50,0°	267.0	283.1	309.3	337.2	363.9	388.2	409.6	426.5	438.2	442.5	440.2	440.2	447.9
52,5°	275.3	296.7	328.0	361.3	392.7	421.9	444.1	461.2	472.1	478.0	494.3	521.3	542.3
55,0°	288.0	315.6	354.6	395.1	433.1	466.3	491.8	510.1	525.7	552.5	593.3	626.2	640.2
57,5°	312.7	349.0	398.0	446.9	492.3	529.8	559.1	583.1	612.9	656.3	694.0	712.9	709.6
60,0°	337.3	385.8	448.7	505.5	556.0	597.4	629.0	658.3	692.5	718.5	732.8	723.1	669.8
62,5°	350.0	407.7	477.2	540.5	593.3	632.6	659.3	681.3	689.2	682.0	654.5	579.5	477.7
65,0°	316.3	376.8	447.1	504.0	548.1	577.7	594.3	595.3	578.0	540.7	466.8	384.3	313.0
67,5°	196.1	254.1	308.0	354.9	392.3	417.5	425.2	415.6	385.9	336.8	287.6	242.8	197.9
70,0°	116.8	142.9	168.8	199.2	226.4	242.1	250.7	246.5	228.8	200.6	173.1	148.7	126.7
72,5°	48.9	42.1	39.5	55.6	105.4	131.8	133.6	125.8	106.5	85.8	80.1	78.5	69.5
75,0°	22.3	19.5	19.2	20.9	34.8	56.7	57.8	50.8	30.9	26.0	32.2	32.5	30.1
77,5°	13.4	12.3	12.2	12.9	16.0	21.6	22.1	17.4	15.3	15.3	17.4	19.0	21.7
80,0°	7.7	7.4	7.7	8.1	8.7	10.2	10.2	9.4	9.7	10.0	10.4	10.9	12.2
82,5°	4.1	4.1	4.3	4.6	4.8	5.1	5.7	5.7	5.9	6.0	6.1	6.0	5.9
85,0°	1.9	1.8	1.9	2.0	2.2	2.4	2.6	2.8	2.8	2.8	2.7	2.6	2.4
87,5°	0.9	0.9	0.8	0.8	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight 20 midi LED</b>	<b>Order number: 5XA7682D1A4AC</b> <b>EAN: 4058352222416</b>	<b>LP number</b> <b>58576_3</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>

**siteco**

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9
2,5°	178.4	178.2	178.1	178.0	177.9	177.9	180.8	180.8	180.8	180.8	180.7	180.7	180.6
5,0°	174.1	173.4	172.9	172.6	172.5	172.5	184.0	183.9	183.7	183.4	183.0	182.4	181.8
7,5°	169.0	167.8	167.0	166.4	166.1	166.0	189.0	188.8	188.2	187.3	186.2	184.7	182.9
10,0°	168.2	167.4	167.0	166.8	166.9	166.9	196.1	195.7	194.6	192.8	190.4	187.3	183.8
12,5°	176.3	176.2	176.2	176.5	176.6	176.7	204.8	204.3	202.6	199.6	195.5	190.6	184.6
15,0°	189.4	189.4	189.7	190.1	190.5	190.5	214.0	213.3	210.7	206.2	200.3	192.9	184.0
17,5°	207.3	208.0	208.5	209.2	209.8	209.9	223.3	222.1	218.4	212.3	204.0	193.6	180.1
20,0°	228.2	228.8	229.4	229.9	230.3	230.3	231.5	229.8	224.9	217.0	205.7	190.3	166.4
22,5°	252.4	252.9	253.3	253.8	254.0	253.8	239.6	237.7	231.4	220.5	203.7	177.1	144.0
25,0°	276.7	276.9	277.0	277.7	278.0	277.7	247.5	245.1	236.8	222.0	193.8	156.1	119.5
27,5°	303.6	303.1	302.4	303.2	303.6	303.3	253.3	250.0	239.7	217.0	174.8	130.8	95.4
30,0°	328.6	326.1	324.3	324.2	323.9	322.9	255.2	251.2	238.8	203.2	152.9	107.3	78.5
32,5°	350.6	346.3	343.1	340.9	337.1	334.2	257.1	252.7	235.1	186.8	130.3	88.3	69.8
35,0°	368.8	361.3	356.5	350.6	340.0	334.7	258.7	253.5	225.8	166.7	106.8	73.1	65.2
37,5°	380.8	369.5	363.2	351.9	334.9	328.5	259.4	252.9	212.7	146.0	88.0	65.4	62.8
40,0°	387.7	373.0	363.3	343.5	323.9	317.9	259.7	250.3	199.2	127.8	76.1	61.9	60.7
42,5°	390.0	371.4	353.5	331.6	318.1	313.9	259.4	246.9	189.4	115.0	70.4	59.4	58.8
45,0°	384.4	366.9	352.3	340.9	332.2	329.9	258.7	243.2	181.7	105.8	65.8	57.1	57.0
47,5°	396.0	389.7	384.4	380.6	373.9	373.2	258.9	240.0	175.3	100.4	62.3	55.0	55.2
50,0°	458.1	458.1	448.9	441.8	432.1	429.5	260.8	237.4	169.3	94.5	59.2	53.0	53.5
52,5°	550.7	541.8	522.6	504.5	485.6	481.0	265.5	238.4	165.7	91.4	57.0	51.1	51.7
55,0°	636.6	610.4	568.8	525.7	494.3	487.2	275.3	243.2	167.6	91.4	55.9	49.3	49.7
57,5°	672.1	604.8	524.7	456.8	415.8	405.5	292.0	255.8	180.6	101.7	61.0	48.6	47.5
60,0°	574.7	466.3	375.8	316.6	282.4	273.2	309.0	268.9	198.3	124.4	79.5	53.3	45.7
62,5°	381.2	303.5	247.0	203.1	171.1	163.0	313.6	273.2	210.0	145.1	101.0	67.1	46.2
65,0°	254.3	201.4	146.7	98.7	73.7	72.1	277.5	248.6	202.2	149.0	104.6	72.8	50.4
67,5°	162.1	121.9	57.2	40.9	37.9	36.6	147.3	155.0	152.5	128.7	92.2	62.6	49.8
70,0°	105.4	79.1	39.4	31.3	29.5	28.0	47.6	43.2	62.9	70.1	56.8	49.6	43.3
72,5°	55.6	44.1	29.7	23.8	22.1	20.8	26.2	23.8	25.9	32.8	30.3	29.8	29.6
75,0°	29.5	29.7	23.0	18.3	17.0	15.7	18.4	16.6	17.8	20.4	20.1	19.7	19.5
77,5°	24.2	22.5	16.4	13.4	12.2	11.1	13.5	11.8	12.6	13.9	13.6	13.6	13.5
80,0°	13.8	12.7	10.0	9.0	7.9	7.1	7.8	7.7	8.0	8.9	8.9	8.8	8.8
82,5°	5.7	5.7	5.2	4.6	4.1	3.8	4.3	4.4	4.5	4.9	5.2	5.2	5.3
85,0°	2.2	2.0	1.8	1.6	1.5	1.4	2.0	2.0	2.1	2.3	2.4	2.5	2.5
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.9	0.9	0.9	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> Floodlight 20 midi LED	<b>Order number: 5XA7682D1A4AC</b> <b>EAN: 4058352222416</b>	<b>LP number</b> 58576_3
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	179.9	0.3	0.3
2,5°	180.5	180.3	180.0	179.8	179.6	179.4	179.1	178.9	178.7	178.7	178.8	2.1	2.4
5,0°	181.0	180.2	179.2	178.2	177.2	176.4	175.5	174.8	174.4	174.2	174.1	4.3	6.7
7,5°	180.8	178.6	176.4	174.2	172.0	170.0	168.2	166.7	165.6	165.1	164.9	6.3	13.0
10,0°	179.9	175.8	171.6	167.6	163.5	159.9	156.7	153.9	151.9	150.8	150.4	8.4	21.4
12,5°	178.0	171.0	163.7	156.5	149.3	142.5	136.1	130.8	127.0	124.6	123.8	10.4	31.8
15,0°	173.7	161.6	147.6	133.7	121.5	111.6	103.7	97.8	93.7	91.2	90.4	12.4	44.2
17,5°	160.5	139.0	119.5	103.6	91.7	83.3	77.4	73.6	71.1	69.7	69.2	14.5	58.7
20,0°	138.8	114.2	95.2	82.1	74.1	69.9	67.5	66.0	64.9	64.1	63.8	16.8	75.5
22,5°	114.0	92.0	78.5	71.5	68.4	66.7	65.3	64.0	63.0	62.2	61.8	19.5	95.0
25,0°	92.1	76.9	70.6	68.4	67.0	65.7	64.4	63.2	62.0	60.9	60.5	22.3	117.3
27,5°	76.0	69.9	68.2	67.3	66.3	65.3	64.0	62.6	61.2	59.9	59.2	25.3	142.7
30,0°	69.2	67.5	67.0	66.5	66.0	65.1	63.9	62.3	60.7	59.0	58.2	28.3	171.0
32,5°	66.4	65.9	65.9	65.9	65.8	65.1	63.7	62.0	60.1	58.2	57.1	31.3	202.3
35,0°	64.3	64.3	64.7	65.1	65.2	64.7	63.3	61.3	59.2	57.1	55.9	34.1	236.4
37,5°	62.5	62.8	63.3	64.0	64.2	63.9	62.6	60.7	58.6	56.4	55.0	36.8	273.2
40,0°	60.8	61.3	61.9	62.5	63.0	62.9	62.0	60.3	58.3	56.2	54.9	39.3	312.5
42,5°	59.2	59.8	60.2	61.0	61.6	62.1	61.6	60.0	58.1	56.3	55.1	41.7	354.3
45,0°	57.5	58.1	58.5	59.1	60.2	61.3	61.1	59.6	58.0	56.4	55.2	44.2	398.5
47,5°	55.9	56.5	56.7	57.3	58.8	60.4	60.6	59.2	57.6	56.2	55.1	47.2	445.7
50,0°	54.3	54.8	55.0	55.7	57.5	59.4	59.9	58.8	57.0	55.8	55.0	52.3	498.0
52,5°	52.5	53.2	53.5	54.3	56.1	58.3	59.3	58.5	56.9	55.7	55.2	59.5	557.5
55,0°	50.6	51.4	52.0	52.9	54.7	57.4	58.8	58.6	56.7	55.8	55.6	67.2	624.7
57,5°	48.3	49.4	50.2	51.3	53.2	56.2	58.2	58.2	56.1	55.7	56.0	73.8	698.5
60,0°	45.8	46.8	47.9	49.2	51.4	54.4	56.9	56.6	54.4	54.3	54.7	75.4	773.9
62,5°	43.1	43.7	44.7	46.1	48.5	51.4	54.1	53.6	51.5	51.2	51.5	70.8	844.7
65,0°	41.0	40.4	41.3	42.9	45.0	48.1	50.7	50.1	47.7	47.1	47.5	59.6	904.3
67,5°	40.3	36.4	37.3	38.9	41.3	44.1	45.9	44.8	41.9	41.5	42.4	41.3	945.6
70,0°	36.6	32.1	32.9	34.8	37.1	39.4	40.3	38.5	35.5	36.6	37.0	25.2	970.8
72,5°	27.7	26.2	27.5	29.5	31.6	33.3	33.6	30.8	28.6	31.2	32.2	13.1	983.9
75,0°	19.9	20.5	21.9	23.7	25.4	26.8	26.5	23.8	21.8	23.3	24.5	6.9	990.8
77,5°	13.9	14.6	15.4	17.1	18.7	19.9	18.8	16.8	15.2	15.4	15.8	4.3	995.1
80,0°	9.1	9.5	10.1	11.1	12.3	12.9	11.8	10.5	9.4	9.1	8.9	2.6	997.7
82,5°	5.4	5.6	5.9	6.1	6.3	6.2	5.8	5.2	4.7	4.5	4.4	1.4	999.1
85,0°	2.5	2.5	2.6	2.7	2.7	2.7	2.6	2.3	2.1	2.0	2.0	0.6	999.8
87,5°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.2	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Floodlight 20 midi LED	<b>Order number: 5XA7682D1A4AC</b> <b>EAN: 4058352222416</b>	<b>LP number</b> 58576_3
---	---	-----------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	14980	142.0
95	241	252	14231	134.1
90	226	250	13482	126.2
85	211	247	12733	118.6
80	197	245	11984	111.1
75	185	242	11235	103.6
70	171	239	10486	96.3
65	157	236	9737	89.2
60	144	233	8988	82.2
55	130	230	8239	75.4
50	118	226	7490	68.6
45	106	222	6741	61.9
40	94	217	5992	55.3
35	81	212	5243	48.9
30	69	206	4494	42.6
25	57	199	3745	36.4
20	45	191	2996	30.3
15	34	181	2246	24.2