

Photometric test report

Family
Floodlight 20 midi LED

Order number: 5XA7682E2C4AC
EAN: 4058352223376

LP number
58578_17



Version mast flange adapter
Optic asymmetric distribution PL61
Cover toughened safety glass
Lamps 1 x LED 4000K / CRI ≥ 70
(unbekannt LED 4000K / CRI = 70)
Controlgear ECG-DALI
Rated values Net luminous flux = 27150 lm
Power consumption = 207.8 W
Luminous efficacy = 130.6 lm/W

serial
documentation
25.08.2021

siteco

Luminous intensity in cd/klm


C180-0

C190-10

C195-15

C270-90

Imax: 745 cd/klm

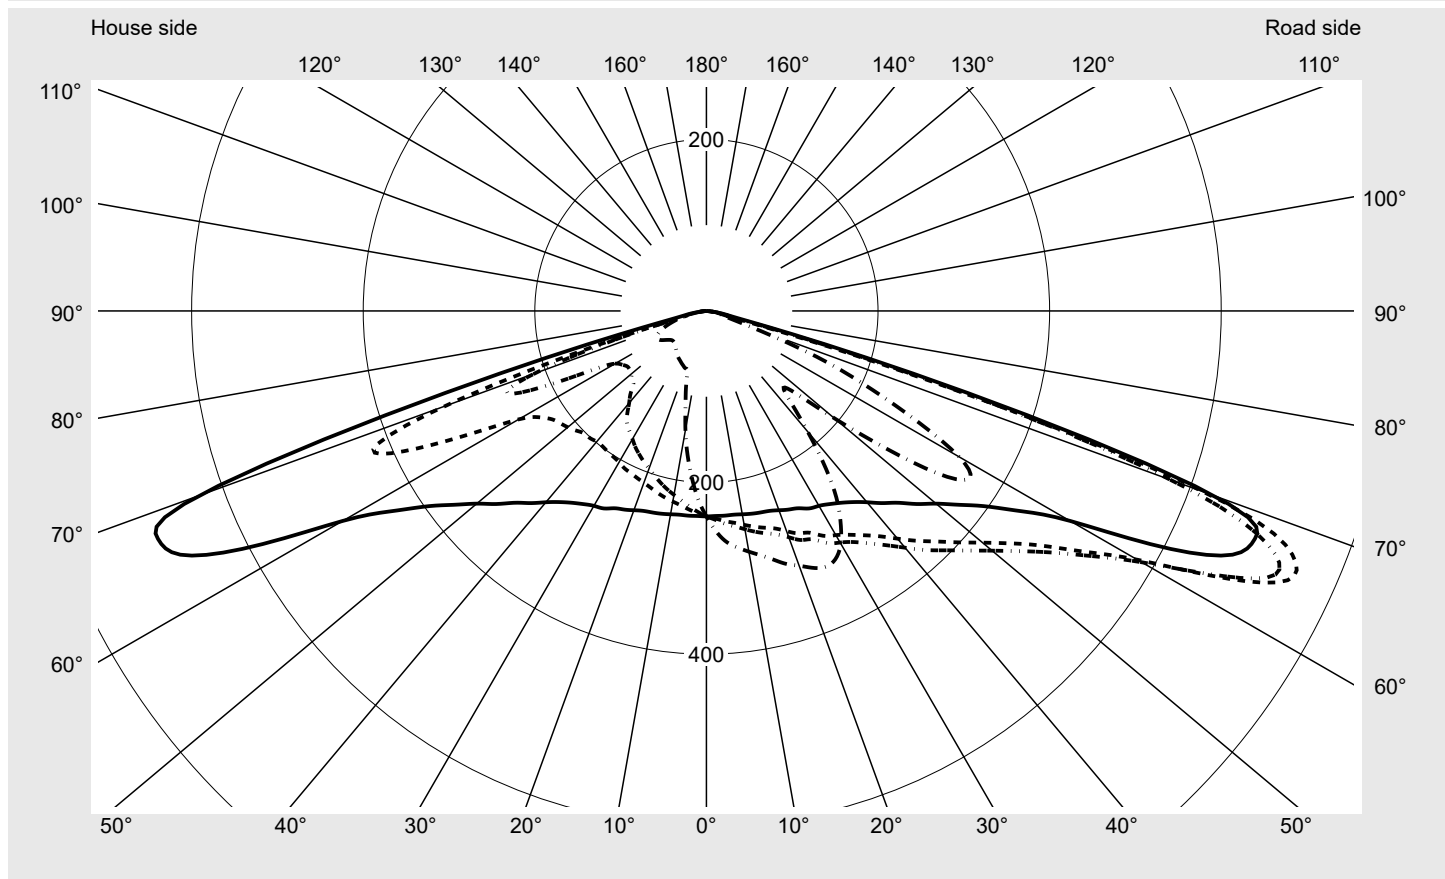

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G3
Imax 70°	640.5
Imax 80°	24.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682E2C4AC EAN: 4058352223376	LP number 58578_17
-----------------------------------------	-----------------------------------------------------------------	------------------------------

Envelope curve in cd/klm **KMK 65°** **KMK 62,5°** **KMK 60°** **KMK 57,5°** **siteco**

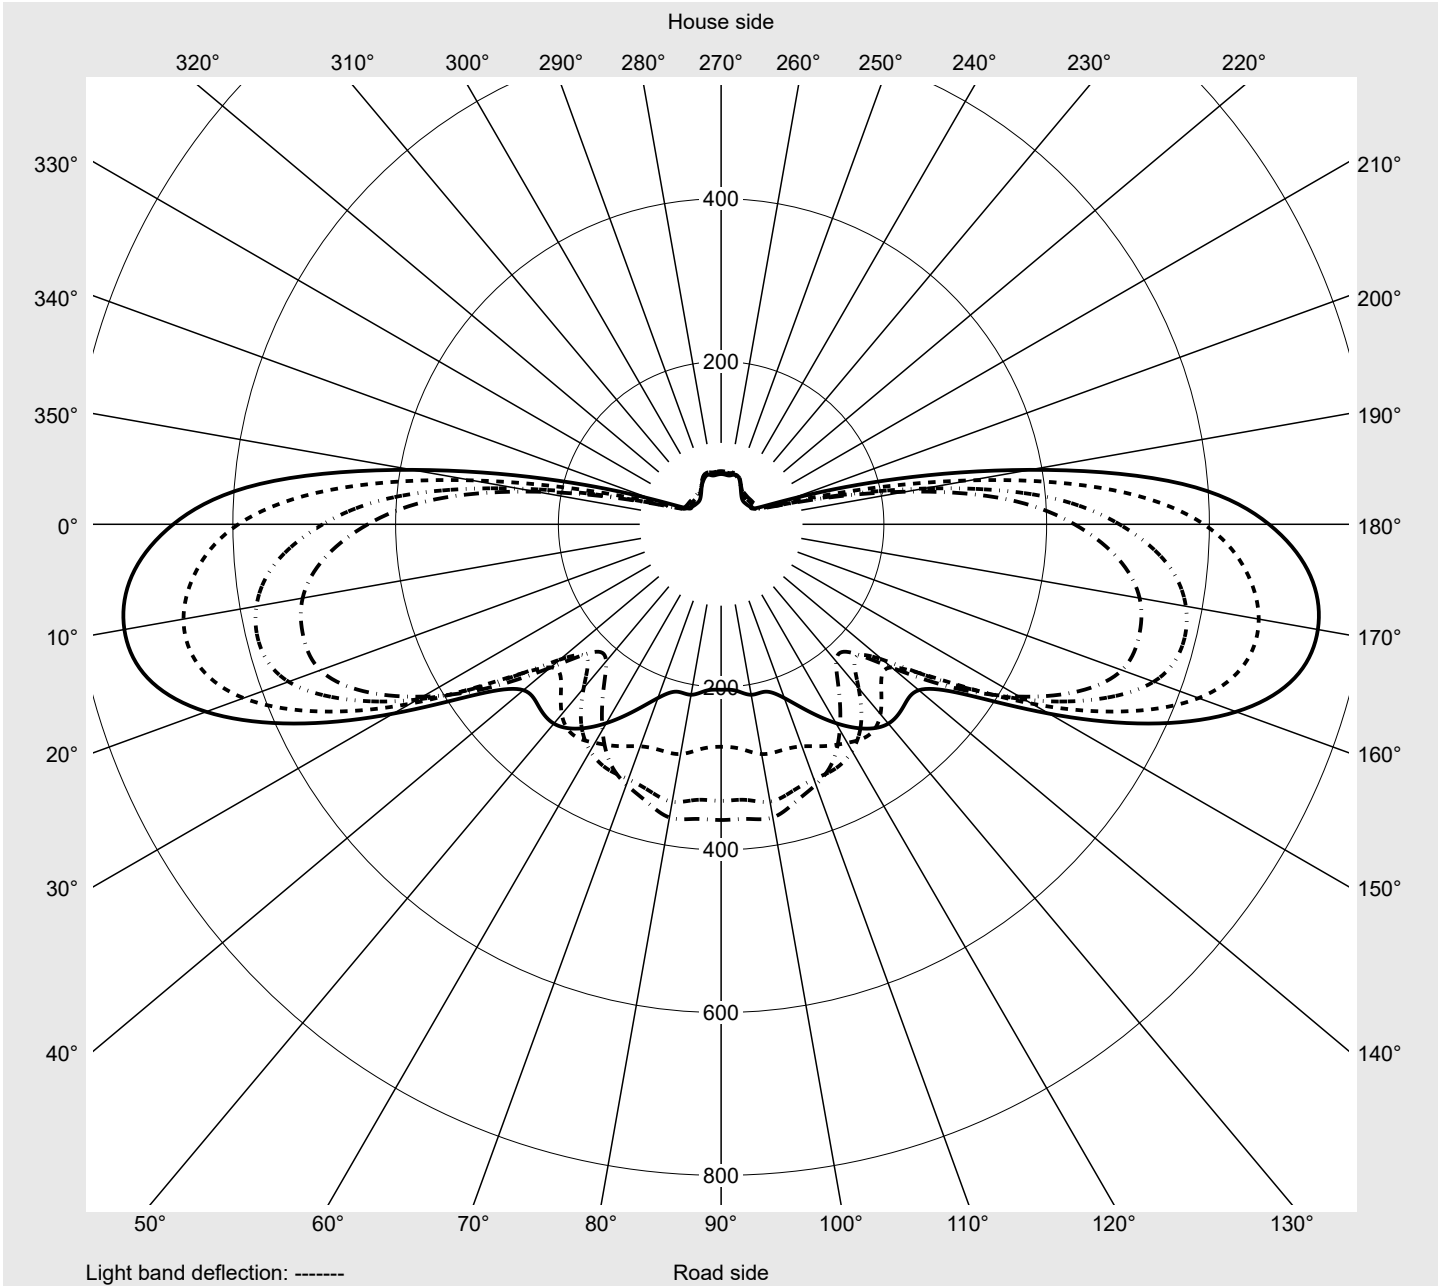

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682E2C4AC EAN: 4058352223376	LP number 58578_17
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5
2,5°	239.2	240.6	242.2	243.7	245.4	247.0	248.5	249.7	250.8	251.8	252.8	253.7	254.4
5,0°	239.5	242.7	245.9	249.0	251.9	254.7	257.2	259.4	261.3	263.0	264.5	265.8	266.9
7,5°	239.6	244.5	249.0	253.2	257.1	260.7	264.0	266.7	269.0	270.9	272.5	273.9	275.0
10,0°	240.7	247.3	253.2	258.3	262.9	266.8	270.2	272.8	274.8	276.2	277.6	279.1	280.5
12,5°	242.1	250.3	257.5	263.6	268.7	272.8	276.1	278.5	280.3	281.7	282.9	284.2	285.5
15,0°	243.2	253.2	261.6	268.3	273.6	277.7	281.0	283.8	286.1	287.9	289.3	290.5	291.6
17,5°	244.4	256.2	265.8	273.1	278.6	282.6	286.0	288.9	291.7	294.1	296.3	298.1	299.7
20,0°	247.2	262.0	273.1	280.6	285.3	288.9	292.0	294.9	297.5	300.4	303.7	306.4	308.1
22,5°	250.6	267.7	280.5	289.0	293.0	295.6	299.1	302.4	305.2	308.2	312.1	315.5	317.9
25,0°	253.7	271.8	285.2	293.6	298.4	302.0	305.7	309.5	313.2	316.6	319.7	323.6	326.3
27,5°	259.5	280.4	295.5	304.9	310.5	314.1	316.1	318.8	322.5	326.2	329.4	331.8	333.4
30,0°	262.3	285.3	301.7	311.7	318.2	323.2	326.6	328.9	330.9	334.2	335.4	334.9	332.8
32,5°	266.9	291.7	309.3	319.4	325.5	330.3	334.7	338.2	339.3	338.9	336.5	331.7	325.8
35,0°	273.0	300.4	319.1	330.7	337.7	342.5	346.3	348.7	347.4	340.9	331.9	324.2	315.2
37,5°	280.8	310.7	331.0	344.1	352.2	356.8	359.5	358.9	351.7	339.1	323.9	313.3	300.6
40,0°	291.0	324.4	346.4	360.2	368.8	374.4	376.5	369.9	354.1	333.7	312.4	293.8	275.9
42,5°	303.8	340.0	363.4	378.0	386.3	391.3	391.2	378.8	354.2	323.4	294.1	267.2	243.1
45,0°	316.2	356.0	380.1	394.5	403.2	407.8	401.4	380.8	347.9	309.8	273.1	238.7	207.4
47,5°	333.1	374.5	399.2	413.4	421.6	424.7	412.0	378.8	338.2	294.3	248.5	208.9	176.1
50,0°	349.4	394.1	420.1	434.7	442.0	440.1	418.4	377.5	326.4	275.1	222.7	184.4	169.2
52,5°	371.1	416.7	444.9	459.9	464.5	452.4	419.9	370.6	310.9	252.5	204.0	186.7	195.6
55,0°	396.9	446.5	476.8	490.8	491.6	467.2	422.8	361.7	293.9	233.1	204.4	210.0	235.1
57,5°	434.2	490.3	522.2	531.6	524.1	485.2	423.4	351.0	274.1	222.1	219.9	252.9	291.6
60,0°	489.5	549.8	579.9	585.8	565.7	508.8	430.4	338.9	258.8	233.1	262.9	299.7	321.7
62,5°	593.3	647.0	670.9	665.5	624.4	544.2	440.8	335.5	273.5	278.1	304.7	316.3	310.1
65,0°	673.3	726.9	744.7	729.6	673.5	579.4	465.3	363.6	317.2	316.8	319.7	306.5	282.1
67,5°	692.3	734.5	738.2	706.3	642.7	556.8	463.7	382.3	347.7	336.9	316.9	279.9	236.1
70,0°	629.0	640.5	619.1	578.0	519.0	457.0	394.4	353.3	340.5	324.9	286.4	233.9	198.5
72,5°	327.9	325.8	291.9	301.0	323.1	314.1	287.3	268.5	257.1	233.5	204.7	182.0	158.1
75,0°	97.0	63.1	54.8	75.1	154.3	189.6	178.5	152.6	113.5	87.4	107.1	102.2	86.8
77,5°	32.8	28.1	25.1	25.4	52.2	80.6	76.8	38.5	23.7	25.5	35.7	35.5	32.3
80,0°	20.7	17.4	17.1	16.6	19.5	24.8	19.4	13.3	12.8	13.0	14.2	16.7	16.3
82,5°	10.1	9.1	9.8	10.2	9.5	9.2	8.9	7.5	7.6	7.7	7.4	8.2	8.6
85,0°	3.6	3.2	3.4	3.4	3.3	3.4	3.4	3.4	3.4	3.4	3.2	3.2	3.1
87,5°	1.2	1.2	1.2	1.1	1.1	1.0	0.9	0.9	0.8	0.8	0.7	0.6	0.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682E2C4AC EAN: 4058352223376	LP number 58578_17
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5
2,5°	255.0	255.6	256.1	256.5	256.9	257.0	237.6	236.0	234.3	232.7	231.2	229.8	228.5
5,0°	267.7	268.3	269.0	269.7	270.2	270.3	236.0	232.3	228.7	225.1	221.6	218.2	215.0
7,5°	275.7	276.2	276.8	277.5	278.0	278.2	234.1	228.5	222.8	217.2	211.7	206.5	201.3
10,0°	281.4	282.1	282.9	283.9	284.6	284.9	233.4	225.6	217.7	209.9	202.2	194.8	187.6
12,5°	286.9	288.2	289.4	290.5	291.4	291.7	232.7	222.8	212.6	202.7	192.8	183.2	173.6
15,0°	293.1	295.1	297.1	298.7	299.6	299.8	231.8	219.5	207.0	194.8	182.8	171.1	159.1
17,5°	301.1	303.2	305.8	307.7	308.7	309.1	230.8	216.0	201.1	186.5	171.9	157.5	143.0
20,0°	309.2	310.8	313.6	315.4	316.0	316.0	230.5	213.1	195.5	178.2	160.7	143.4	127.2
22,5°	318.3	319.3	321.7	324.1	324.3	324.1	231.1	210.8	190.3	170.2	149.8	130.0	112.4
25,0°	327.4	327.5	328.5	330.3	329.8	329.1	232.1	208.5	184.8	161.1	138.0	116.2	95.6
27,5°	332.5	329.9	328.9	329.9	328.0	325.9	234.0	206.8	179.1	151.6	124.4	97.9	81.4
30,0°	329.4	323.9	321.5	321.3	317.4	313.1	234.1	203.6	172.4	141.4	106.9	82.4	76.2
32,5°	319.2	312.0	307.3	304.1	295.6	290.9	235.8	201.7	166.6	129.7	91.2	75.8	73.5
35,0°	305.5	295.3	287.6	278.7	266.3	263.1	238.3	200.3	161.0	115.5	79.9	72.0	70.9
37,5°	285.5	270.6	258.3	240.6	226.8	225.0	242.2	198.9	151.7	100.3	73.3	69.3	68.5
40,0°	255.6	237.1	219.7	195.2	185.0	183.7	248.0	198.8	140.1	85.3	68.2	66.5	65.9
42,5°	218.8	194.2	173.9	156.4	149.0	148.0	254.8	201.0	131.0	77.5	64.8	63.6	63.2
45,0°	181.0	156.7	141.7	130.5	126.7	127.1	263.3	201.7	120.4	71.4	61.7	60.7	60.4
47,5°	157.5	145.8	141.0	141.9	141.4	144.0	275.1	206.3	118.8	68.7	59.2	58.2	57.8
50,0°	172.0	175.4	180.4	188.9	191.2	194.6	287.2	210.9	113.6	65.4	56.6	55.6	55.1
52,5°	211.8	224.2	237.9	253.7	258.4	261.7	302.8	214.9	112.5	63.4	54.2	53.1	52.5
55,0°	265.3	288.2	308.0	327.0	329.2	331.6	321.4	220.0	112.7	61.3	51.8	50.5	50.0
57,5°	323.1	340.4	353.1	365.8	363.4	363.4	352.4	230.7	116.6	60.1	49.3	48.0	47.5
60,0°	331.5	333.4	339.3	346.1	339.9	339.9	397.0	252.7	122.8	59.8	46.9	45.5	45.0
62,5°	300.7	290.4	287.4	286.7	277.0	273.4	483.0	311.0	147.5	64.8	45.3	43.3	42.6
65,0°	253.4	227.2	212.9	212.7	205.1	203.4	568.9	385.2	207.0	89.5	46.7	41.7	40.4
67,5°	201.9	183.2	157.4	145.0	134.7	137.1	586.1	419.8	251.0	133.6	58.6	42.4	37.8
70,0°	179.3	159.0	76.7	59.5	55.4	61.0	469.1	325.6	213.5	120.4	59.8	44.4	36.6
72,5°	141.1	117.8	36.2	28.5	28.5	27.5	196.0	136.9	113.2	71.9	45.2	39.0	32.2
75,0°	76.2	62.7	25.0	21.1	20.9	19.7	57.7	36.1	37.9	34.6	27.7	25.8	23.8
77,5°	31.6	29.8	17.0	14.9	14.6	13.4	26.4	22.7	22.4	20.9	18.3	17.0	16.6
80,0°	14.2	13.2	10.0	9.3	8.7	8.1	18.9	15.6	13.6	13.0	11.9	11.2	11.1
82,5°	7.0	6.3	5.3	4.8	4.3	4.0	10.3	8.8	7.5	7.3	8.1	6.8	6.7
85,0°	2.6	2.3	1.9	1.7	1.7	1.6	3.8	3.4	3.2	3.3	3.7	3.4	3.3
87,5°	0.6	0.6	0.6	0.6	0.6	0.6	1.3	1.3	1.3	1.4	1.3	1.3	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682E2C4AC EAN: 4058352223376	LP number 58578_17
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	239.5	0.4	0.4
2,5°	227.2	225.9	224.6	223.6	222.7	221.9	221.2	220.5	220.1	219.9	219.9	2.9	3.2
5,0°	212.0	209.0	206.3	203.8	201.6	199.6	197.9	196.6	195.6	195.2	195.0	5.6	8.9
7,5°	196.3	191.7	187.4	183.4	179.7	176.5	173.7	171.6	170.0	169.2	168.9	8.3	17.1
10,0°	180.5	173.8	167.5	161.7	156.3	151.7	147.7	144.7	142.5	141.3	140.9	10.7	27.9
12,5°	164.1	154.9	146.3	138.5	131.5	125.6	120.8	117.2	114.6	113.1	112.6	13.1	40.9
15,0°	147.0	135.8	125.6	116.9	109.5	103.6	99.0	95.9	93.7	92.4	91.9	15.3	56.2
17,5°	129.3	117.1	105.9	95.3	87.4	82.1	78.6	76.3	75.0	74.1	73.9	17.4	73.6
20,0°	113.2	98.1	85.6	79.3	76.7	75.0	73.8	72.9	72.0	71.4	71.2	19.7	93.3
22,5°	95.0	82.3	78.1	76.5	75.2	73.9	72.6	71.5	70.5	69.8	69.6	22.2	115.5
25,0°	81.5	77.6	76.4	75.4	74.3	72.9	71.5	70.2	69.0	68.1	67.7	24.6	140.0
27,5°	77.2	75.9	75.2	74.4	73.3	71.9	70.3	68.8	67.5	66.4	65.8	27.0	167.1
30,0°	75.0	74.4	74.0	73.4	72.4	71.1	69.4	67.6	66.1	64.8	64.1	29.1	196.2
32,5°	73.0	72.8	72.7	72.3	71.5	70.1	68.3	66.4	64.7	63.1	62.3	31.0	227.2
35,0°	70.7	70.7	71.1	70.8	70.1	68.7	66.8	64.7	62.8	61.1	60.1	32.6	259.8
37,5°	68.4	68.7	69.0	68.9	68.3	67.0	65.2	63.0	60.9	58.9	57.7	33.9	293.7
40,0°	65.9	66.3	66.6	66.6	66.1	64.9	62.8	60.8	58.8	56.8	55.7	34.8	328.4
42,5°	63.2	63.5	63.8	64.2	63.5	62.2	60.9	59.1	57.1	55.1	53.9	35.4	363.8
45,0°	60.3	60.4	60.9	60.8	60.4	59.8	59.0	57.6	56.0	54.0	52.7	35.9	399.7
47,5°	57.5	57.6	57.6	57.5	57.5	57.4	57.2	56.6	55.4	53.4	52.3	37.4	437.1
50,0°	54.8	54.7	54.2	54.4	54.7	55.2	55.8	56.1	55.4	53.9	52.9	40.1	477.3
52,5°	52.3	51.8	51.5	51.8	52.6	54.0	55.8	57.1	56.9	56.1	55.4	44.0	521.3
55,0°	49.7	49.1	49.3	49.8	51.2	54.0	57.2	59.7	59.7	59.4	59.0	49.0	570.3
57,5°	47.0	46.7	47.1	48.1	50.3	54.9	60.1	63.2	62.8	62.9	63.2	54.1	624.4
60,0°	44.4	44.3	44.9	46.7	50.3	56.4	63.0	65.8	64.7	64.9	65.4	58.2	682.6
62,5°	41.9	41.8	42.6	45.2	49.8	56.6	63.2	65.4	63.8	64.3	64.7	62.7	745.4
65,0°	39.4	39.1	40.3	43.4	48.5	55.5	62.0	63.2	60.9	61.1	61.7	66.5	811.9
67,5°	36.2	35.8	37.1	40.3	45.6	52.7	58.1	58.5	55.7	55.6	56.0	65.8	877.7
70,0°	32.2	31.7	33.2	36.7	41.9	47.8	51.8	51.5	48.8	48.0	48.6	56.2	933.9
72,5°	27.3	26.7	28.3	31.5	36.0	40.7	43.3	42.4	39.8	38.7	39.9	35.2	969.1
75,0°	21.9	21.8	23.2	26.0	29.5	33.0	34.3	33.1	30.6	30.0	31.7	16.3	985.4
77,5°	16.5	16.7	17.8	19.8	22.4	24.6	25.4	23.9	21.9	21.5	22.1	7.4	992.8
80,0°	11.3	11.4	12.2	13.6	15.1	16.4	16.6	15.2	13.9	13.5	13.6	3.9	996.7
82,5°	6.7	6.8	7.2	7.7	8.1	8.4	8.2	7.5	6.9	6.7	6.7	2.1	998.8
85,0°	3.2	3.1	3.2	3.3	3.4	3.6	3.5	3.1	2.8	2.7	2.7	0.8	999.7
87,5°	1.2	1.2	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight 20 midi LED	Order number: 5XA7682E2C4AC EAN: 4058352223376	LP number 58578_17
-----------------------------------------	-----------------------------------------------------------------	------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	27150	207.8
95	239	252	25793	196.0
90	225	250	24435	184.4
85	211	247	23078	173.1
80	196	245	21720	161.9
75	184	242	20363	151.1
70	170	239	19005	140.2
65	156	236	17648	129.8
60	143	233	16290	119.6
55	131	230	14933	109.2
50	118	226	13575	99.2
45	105	222	12218	89.5
40	92	217	10860	79.9
35	81	212	9503	70.4
30	69	206	8145	61.0
25	57	199	6788	51.8
20	46	191	5430	43.0
15	34	180	4072	34.2