


Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C41E08FE EAN: 4058352583654	LP number 58290_150
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution (P1.0a) Cover transparent, PMMA Lamps LED 4000 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 5820 lm Power consumption = 46.3 W Luminous efficacy = 125.7 lm/W	serial documentation 17.08.2022



Luminous intensity in cd/klm C180-0 C185-5 C270-90 **Imax: 975 cd/klm**

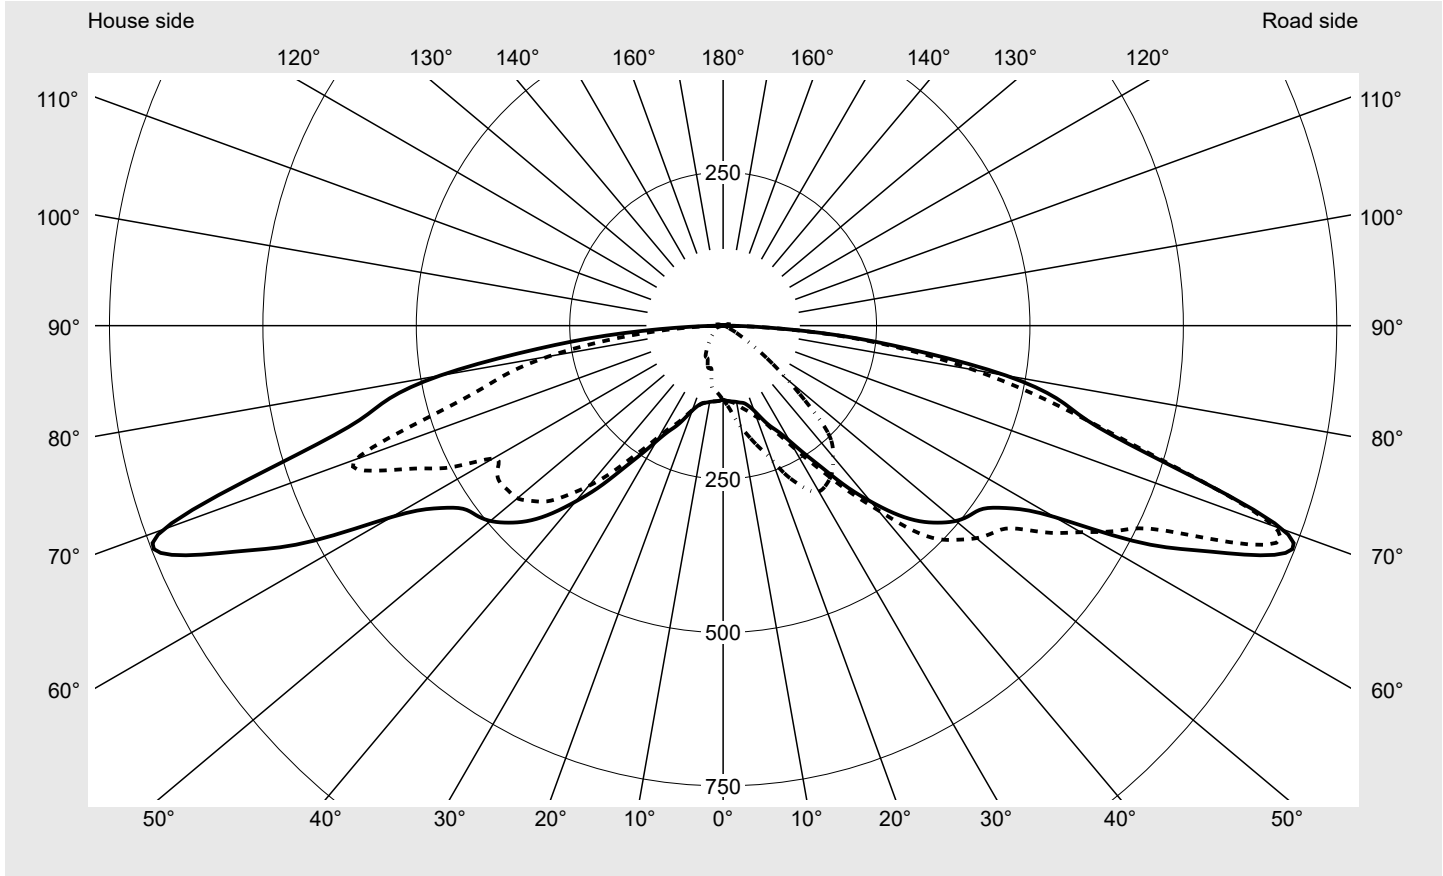

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	970.0
Imax 80°	468.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C41E08FE EAN: 4058352583654	LP number 58290_150
-------------------------------------------------	----------------------------------------------------------------	--------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°**

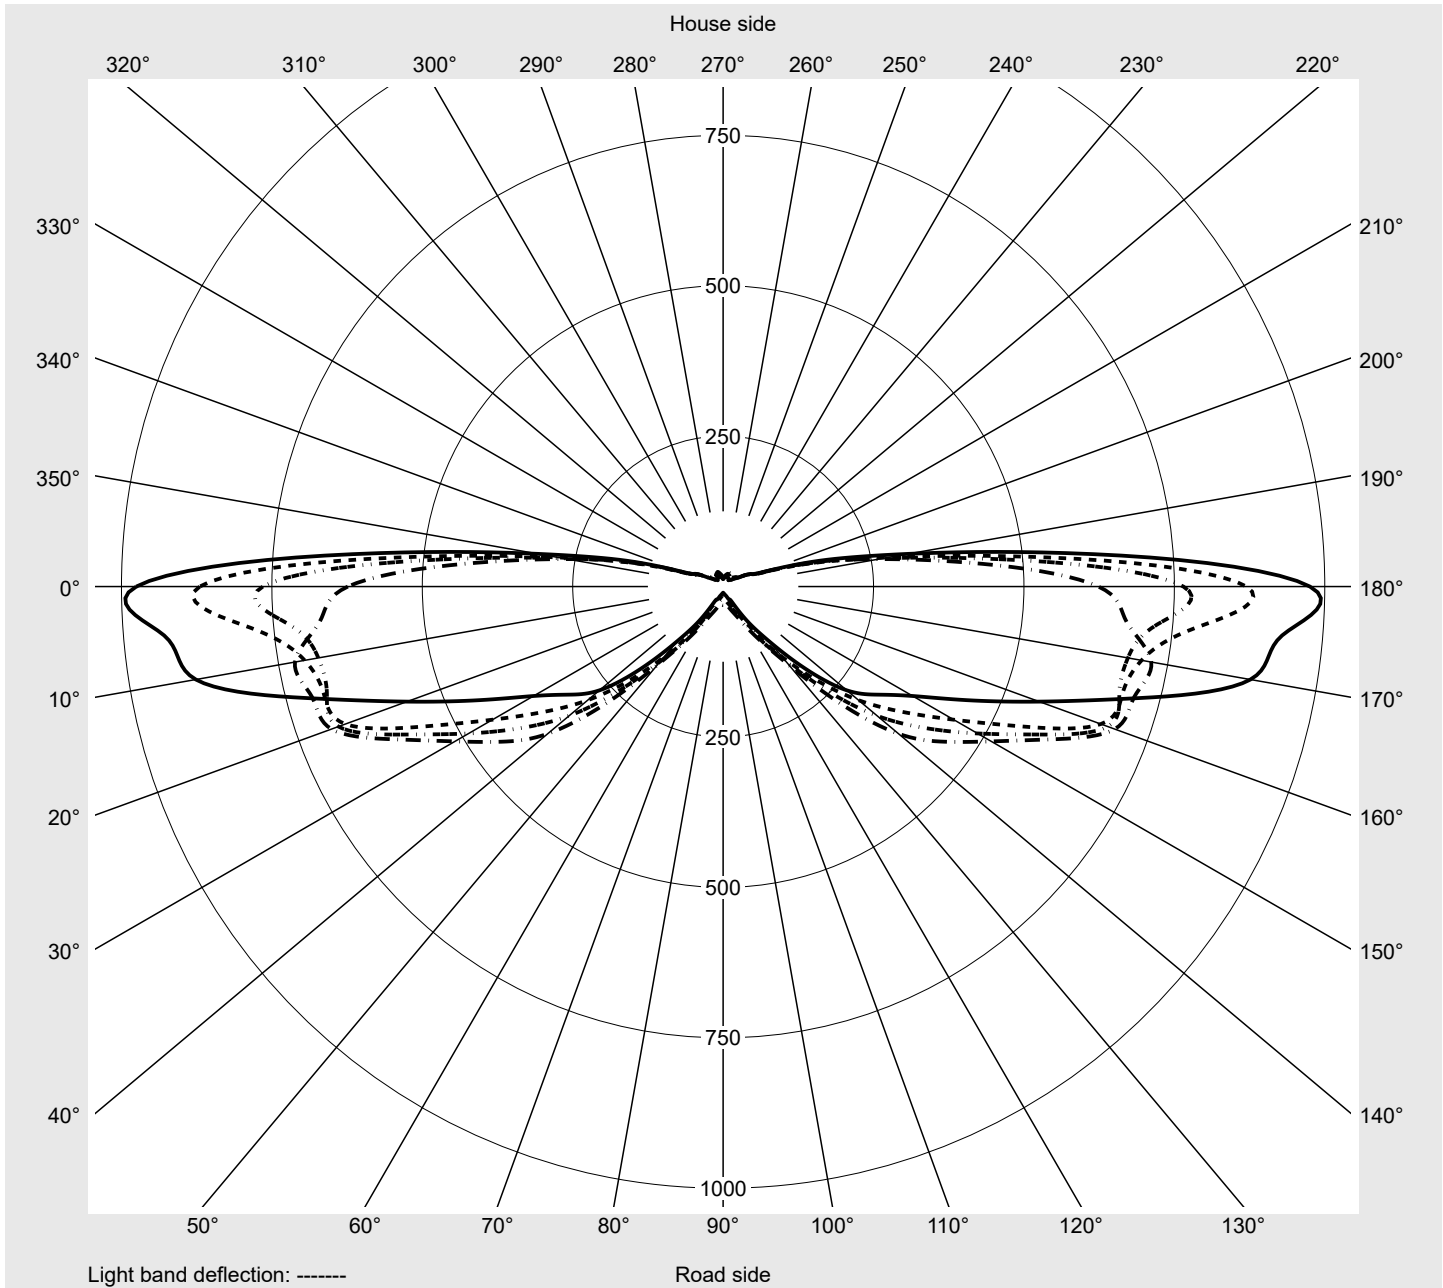

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C41E08FE EAN: 4058352583654	LP number 58290_150
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9
2,5°	122.3	122.5	122.6	123.2	123.7	123.4	123.1	123.4	123.7	124.7	125.7	126.5	127.1
5,0°	123.7	124.0	124.3	125.4	126.6	128.2	129.7	130.6	131.5	133.0	134.7	136.1	137.1
7,5°	124.7	126.5	128.8	133.3	138.0	141.2	143.7	145.6	147.0	148.2	149.3	150.9	152.7
10,0°	126.2	130.4	135.0	141.5	147.9	152.4	156.1	159.3	161.9	163.8	165.3	167.1	168.6
12,5°	128.5	136.5	143.9	149.9	155.1	160.1	165.1	170.7	176.1	180.5	184.4	184.5	184.6
15,0°	130.7	142.2	152.4	158.4	163.4	169.3	175.7	182.8	189.8	195.8	201.5	201.5	201.6
17,5°	136.9	149.0	159.7	166.0	171.2	178.3	185.9	193.8	201.6	209.1	215.4	218.9	221.5
20,0°	147.2	157.9	167.8	175.4	182.7	192.3	201.7	209.0	215.6	222.8	229.4	234.3	238.7
22,5°	163.1	166.7	172.6	184.8	199.0	212.3	225.7	228.8	232.4	237.4	242.9	248.6	254.3
25,0°	180.1	183.6	186.3	201.4	216.7	233.0	249.6	250.1	250.6	254.1	257.7	261.5	265.5
27,5°	195.0	202.5	211.1	222.8	234.9	245.6	255.3	263.7	271.6	274.1	276.7	275.9	274.9
30,0°	217.4	229.1	240.4	248.8	256.5	258.7	260.9	276.1	291.2	290.9	290.7	282.9	275.1
32,5°	248.0	261.1	273.7	276.3	278.7	281.0	283.2	296.0	308.8	305.0	301.1	282.5	263.9
35,0°	284.4	299.2	312.1	310.8	309.6	308.8	308.1	317.2	326.4	317.0	303.5	277.7	247.7
37,5°	331.0	344.9	353.9	352.0	350.1	342.1	334.1	331.6	329.1	314.6	295.3	262.0	223.9
40,0°	374.2	392.1	403.9	400.7	397.5	381.6	365.7	351.4	334.7	312.8	284.2	244.3	200.1
42,5°	416.0	448.2	476.1	469.0	461.9	436.1	408.8	377.9	344.2	306.8	268.7	233.2	198.3
45,0°	450.1	491.0	528.9	521.1	513.4	481.0	445.7	402.1	354.4	301.8	253.4	220.1	196.6
47,5°	475.2	516.4	552.2	548.7	545.2	514.2	477.5	425.1	365.1	297.4	237.2	204.4	183.7
50,0°	495.1	538.7	575.9	576.8	577.8	542.1	500.6	443.3	376.5	295.9	223.5	186.9	164.8
52,5°	507.3	554.5	593.7	603.7	613.8	565.0	513.8	459.3	394.8	302.7	215.3	165.9	133.8
55,0°	519.6	575.8	624.0	634.5	645.0	582.4	520.6	465.7	401.7	301.3	203.9	146.6	109.0
57,5°	553.9	627.9	687.7	682.8	677.8	595.6	517.6	457.2	391.1	286.3	185.8	129.4	93.7
60,0°	623.7	673.2	722.6	707.6	692.7	600.9	514.7	449.6	380.6	273.4	171.3	113.5	77.7
62,5°	765.0	724.1	683.2	681.8	680.4	582.0	488.3	410.0	334.1	244.9	162.1	106.3	59.2
65,0°	869.8	788.1	706.3	687.2	668.1	550.6	442.6	362.9	293.8	220.9	152.9	96.0	43.0
67,5°	975.3	932.6	889.9	716.1	559.2	446.8	363.8	313.2	268.3	192.9	118.3	70.4	30.3
70,0°	970.0	955.0	939.9	679.3	458.3	349.5	293.2	261.4	232.0	159.5	86.0	46.9	17.5
72,5°	775.6	781.4	787.2	572.6	358.0	286.7	225.8	200.4	176.6	116.6	57.2	30.5	13.2
75,0°	627.2	632.9	638.6	459.6	280.7	225.1	176.3	151.1	126.7	80.5	28.3	19.1	9.8
77,5°	561.6	521.6	481.7	351.7	241.3	188.8	157.4	120.1	84.9	51.4	18.6	13.2	7.8
80,0°	468.3	413.9	354.0	271.0	194.5	158.4	131.2	85.3	43.2	23.9	11.7	8.7	6.1
82,5°	324.8	303.9	272.2	207.6	132.0	113.5	92.3	60.4	30.7	17.2	8.7	6.6	4.8
85,0°	198.9	192.4	185.9	132.3	78.7	69.1	57.4	37.8	19.3	11.0	5.8	4.5	3.4
87,5°	74.6	72.1	69.7	49.6	29.5	25.9	21.5	14.2	7.2	4.1	2.2	1.7	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C41E08FE EAN: 4058352583654	LP number 58290_150
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9
2,5°	127.4	127.7	127.7	127.7	128.0	128.2	122.3	122.3	122.1	121.9	121.9	121.9	121.9
5,0°	137.7	138.1	138.1	138.1	138.3	138.5	123.5	123.4	123.4	123.5	123.6	123.7	123.0
7,5°	153.2	153.7	154.1	154.4	153.8	153.2	124.4	124.2	124.7	125.1	126.8	128.5	125.0
10,0°	169.4	170.0	169.9	169.8	168.9	167.9	125.6	124.9	126.7	128.2	129.0	129.5	125.4
12,5°	186.2	187.7	185.4	183.4	182.4	181.9	128.2	128.0	130.8	133.6	127.8	122.8	120.2
15,0°	203.1	204.5	201.3	198.0	197.7	197.3	131.6	132.5	135.5	138.4	129.3	120.2	118.1
17,5°	221.1	220.7	216.8	212.9	213.1	213.3	137.5	138.1	140.1	142.1	132.7	123.3	131.5
20,0°	237.1	235.3	232.9	230.3	231.6	232.8	146.5	145.8	146.1	146.4	137.0	127.5	145.4
22,5°	251.7	249.2	252.2	255.2	257.7	260.2	159.2	155.9	153.9	152.3	145.2	138.0	144.5
25,0°	262.6	259.7	266.6	272.9	277.9	282.5	174.3	167.8	162.7	156.9	148.6	139.5	137.4
27,5°	273.1	271.1	276.4	282.7	291.9	301.9	188.1	180.5	171.1	159.6	143.2	127.6	120.2
30,0°	273.0	270.9	278.6	287.3	299.1	311.9	208.0	197.1	181.3	162.2	137.9	115.4	103.4
32,5°	258.5	253.1	268.9	284.0	297.3	309.8	235.0	218.3	192.5	162.9	130.4	102.2	88.7
35,0°	241.8	235.9	259.7	280.8	293.6	303.6	266.3	241.9	204.7	163.6	126.6	90.2	79.4
37,5°	221.5	219.2	243.1	264.9	280.3	293.6	305.1	269.2	219.6	166.4	120.4	76.1	69.0
40,0°	201.6	203.2	224.2	244.3	262.0	278.8	341.2	295.9	233.5	168.6	117.3	69.5	62.5
42,5°	194.5	190.6	204.0	219.3	240.4	263.5	374.2	321.6	248.4	174.7	122.4	76.2	62.4
45,0°	183.0	173.7	181.1	188.4	211.6	234.8	404.7	347.2	258.7	171.4	116.1	78.6	58.3
47,5°	166.4	151.9	148.8	145.8	164.0	182.2	422.7	354.8	251.4	153.4	104.1	75.7	55.6
50,0°	143.4	127.0	116.6	108.7	123.0	137.2	437.8	362.3	255.4	136.9	101.6	70.4	51.2
52,5°	109.5	93.2	82.9	75.5	87.9	100.2	441.4	357.0	245.6	123.8	91.0	62.0	44.6
55,0°	83.7	68.1	58.1	51.2	60.7	70.1	444.3	351.7	234.7	108.3	78.5	52.6	38.0
57,5°	69.7	55.1	45.5	38.8	43.2	47.7	435.9	307.2	196.3	88.9	63.7	38.6	31.8
60,0°	55.7	43.7	35.1	29.0	29.8	30.7	432.8	262.8	155.7	69.5	50.0	30.6	27.2
62,5°	45.8	34.2	27.6	22.7	22.4	22.0	499.7	270.6	150.5	66.7	49.5	32.3	26.2
65,0°	33.9	25.8	20.7	17.3	15.0	13.3	550.6	278.5	147.6	63.8	47.3	32.8	24.3
67,5°	23.9	18.3	14.9	12.7	11.3	10.3	617.8	312.8	165.5	70.6	49.4	31.3	22.8
70,0°	15.0	12.6	10.7	9.1	8.4	7.8	636.6	347.2	190.2	77.4	53.8	30.2	23.7
72,5°	11.1	9.3	8.0	7.1	6.5	6.2	514.7	286.9	158.3	62.8	44.8	29.5	21.6
75,0°	8.2	6.8	5.9	5.3	5.0	4.8	416.2	231.8	127.1	49.1	38.4	28.8	22.2
77,5°	6.4	5.2	4.5	4.0	3.9	3.8	359.2	185.2	96.4	36.1	28.9	22.5	18.4
80,0°	4.7	3.9	3.4	2.9	2.9	2.8	288.8	136.8	67.1	24.9	20.6	16.9	14.8
82,5°	3.7	3.0	2.5	2.2	2.0	1.9	201.0	77.2	46.4	15.6	13.8	12.1	11.7
85,0°	2.6	2.1	1.7	1.4	1.2	1.1	116.7	34.5	21.4	8.3	8.0	7.7	8.1
87,5°	1.0	0.8	0.6	0.5	0.5	0.4	43.8	12.9	8.0	3.1	3.0	2.9	3.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C41E08FE EAN: 4058352583654	LP number 58290_150
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	120.9	0.2	0.2
2,5°	121.8	120.9	120.1	119.4	118.5	117.2	115.8	115.0	114.5	114.5	114.5	1.5	1.6
5,0°	122.2	120.9	119.3	117.4	115.4	113.4	111.6	110.5	109.6	109.5	109.3	3.0	4.6
7,5°	121.7	118.7	115.9	113.2	110.9	109.7	108.9	107.8	106.8	106.3	106.0	4.7	9.3
10,0°	121.2	116.7	112.6	109.6	106.9	106.6	106.2	105.2	104.1	103.3	102.6	6.5	15.9
12,5°	118.6	117.2	115.1	110.4	105.1	100.6	96.6	93.4	90.8	89.2	88.0	8.4	24.3
15,0°	116.0	116.8	117.6	109.1	101.2	94.7	88.9	82.7	77.5	75.0	73.4	10.4	34.7
17,5°	139.7	125.7	112.7	102.6	94.6	89.1	84.7	80.1	75.7	74.2	72.8	12.7	47.4
20,0°	163.4	133.0	107.2	94.3	87.5	82.1	78.6	75.8	73.8	72.8	72.1	15.3	62.7
22,5°	151.0	124.6	101.5	87.2	78.1	72.7	69.9	67.8	66.4	66.1	65.9	17.9	80.6
25,0°	135.4	113.5	93.9	80.5	71.1	65.3	61.1	60.0	58.9	59.3	59.7	20.6	101.1
27,5°	112.9	97.6	82.4	74.1	68.4	63.2	58.5	58.2	57.9	58.1	58.4	23.2	124.3
30,0°	94.4	82.6	72.4	67.5	64.3	60.1	56.0	56.4	56.9	57.0	57.1	25.8	150.2
32,5°	80.6	71.7	64.5	60.2	57.4	55.6	54.2	53.9	53.6	52.6	51.5	28.4	178.6
35,0°	69.6	62.4	57.1	54.0	51.8	51.5	51.1	50.6	49.8	48.1	46.2	31.1	209.7
37,5°	62.1	55.8	49.6	49.0	48.3	47.0	45.4	45.3	45.2	43.0	40.7	33.7	243.4
40,0°	55.7	49.5	43.7	44.0	44.3	42.4	40.5	40.3	40.1	38.0	35.9	36.5	279.9
42,5°	50.5	44.3	40.1	39.7	39.3	37.9	36.4	34.7	33.2	32.4	31.9	40.2	320.1
45,0°	45.5	41.1	36.7	35.9	35.1	34.3	33.1	30.8	28.1	28.2	28.3	43.1	363.3
47,5°	40.8	37.2	33.6	32.5	31.4	31.1	30.9	28.2	25.4	25.3	25.1	44.7	407.9
50,0°	36.2	33.3	30.4	29.6	28.8	29.0	29.2	26.3	23.4	22.8	22.2	46.1	454.0
52,5°	31.0	28.9	26.9	27.4	27.8	28.0	28.1	25.0	22.2	20.7	19.7	46.9	500.9
55,0°	27.2	25.4	23.6	25.1	26.6	26.9	27.2	24.2	21.3	19.3	17.4	47.7	548.7
57,5°	26.0	22.8	20.6	23.0	25.1	26.0	26.6	23.8	21.0	18.3	15.6	48.6	597.2
60,0°	24.0	21.0	18.1	20.9	23.3	24.8	25.9	23.3	20.6	17.2	13.7	49.2	646.5
62,5°	20.9	18.1	16.2	18.7	21.2	21.9	22.5	20.6	18.5	16.0	13.4	49.9	696.3
65,0°	17.8	16.0	14.3	16.7	19.1	19.4	19.8	18.2	16.6	14.7	12.9	50.6	746.9
67,5°	17.5	15.6	13.7	15.6	17.2	18.1	18.7	16.9	15.1	13.7	12.4	52.1	799.0
70,0°	17.3	15.2	13.2	13.9	14.7	15.6	16.4	14.7	13.2	12.2	11.3	50.2	849.2
72,5°	17.4	14.6	13.1	11.9	10.9	11.5	12.1	11.3	10.6	10.1	9.8	41.2	890.4
75,0°	17.5	14.8	13.0	10.6	8.2	8.3	8.4	8.2	8.0	7.7	7.4	33.2	923.6
77,5°	15.5	13.1	11.1	9.0	6.9	6.2	5.6	5.2	5.0	3.9	2.9	27.2	950.8
80,0°	13.3	11.2	9.0	7.2	5.6	4.1	2.8	2.8	2.7	1.5	0.2	21.1	971.9
82,5°	11.3	8.7	6.5	5.1	4.0	2.9	1.9	1.7	1.6	0.9	0.2	15.2	987.1
85,0°	8.4	6.1	4.1	3.2	2.6	1.8	1.1	0.7	0.4	0.3	0.2	9.4	996.5
87,5°	3.1	2.3	1.6	1.2	1.0	0.7	0.4	0.3	0.2	0.2	0.1	3.5	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2C41E08FE EAN: 4058352583654	LP number 58290_150
------------------------------------------	----------------------------------------------------------------	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	5820	46.3	48.2	47.2
95	241	252	5522	43.4	45.3	44.3
90	229	250	5247	41.0	42.7	41.8
85	216	248	4949	38.3	39.8	39.0
80	203	246	4651	35.7	37.1	36.4
75	190	243	4354	33.1	34.4	33.8
70	178	241	4079	30.9	32.1	31.5
65	165	238	3781	28.5	29.6	29.0
60	152	235	3483	26.1	27.1	26.6
55	140	232	3208	24.0	24.8	24.4
50	127	229	2910	21.7	22.5	22.1
45	114	225	2612	19.4	20.2	19.8
40	102	221	2337	17.5	18.1	17.8
35	89	216	2039	15.4	15.9	15.6
30	76	210	1741	13.3	13.8	13.6
25	63	203	1444	11.4	11.7	11.6
20	51	195	1169	9.6	9.9	9.8
15	38	184	871	7.7	7.9	7.8
10	25	169	573	5.3	5.5	5.4
9	24	168	550	5.1	5.3	5.2