


Photometric test report

Family Floodlight FL11	Order number: 5XA779418V01AA EAN: 4058352977668	LP number 59472_11
	Version standard bracket Optic asymmetric distribution PL64 Cover toughened safety glass Lamps LED 5700 K CRI ≥ 80 Controlgear ECG-DALI Rated values Ta = 10 °C Net luminous flux = 131410 lm Power consumption = 1021.7 W Luminous efficacy = 128.6 lm/W	serial documentation 23.08.2023



Luminous intensity in cd/klm C180-0 C240-60 C245-65 C270-90 **Imax: 1021 cd/klm**

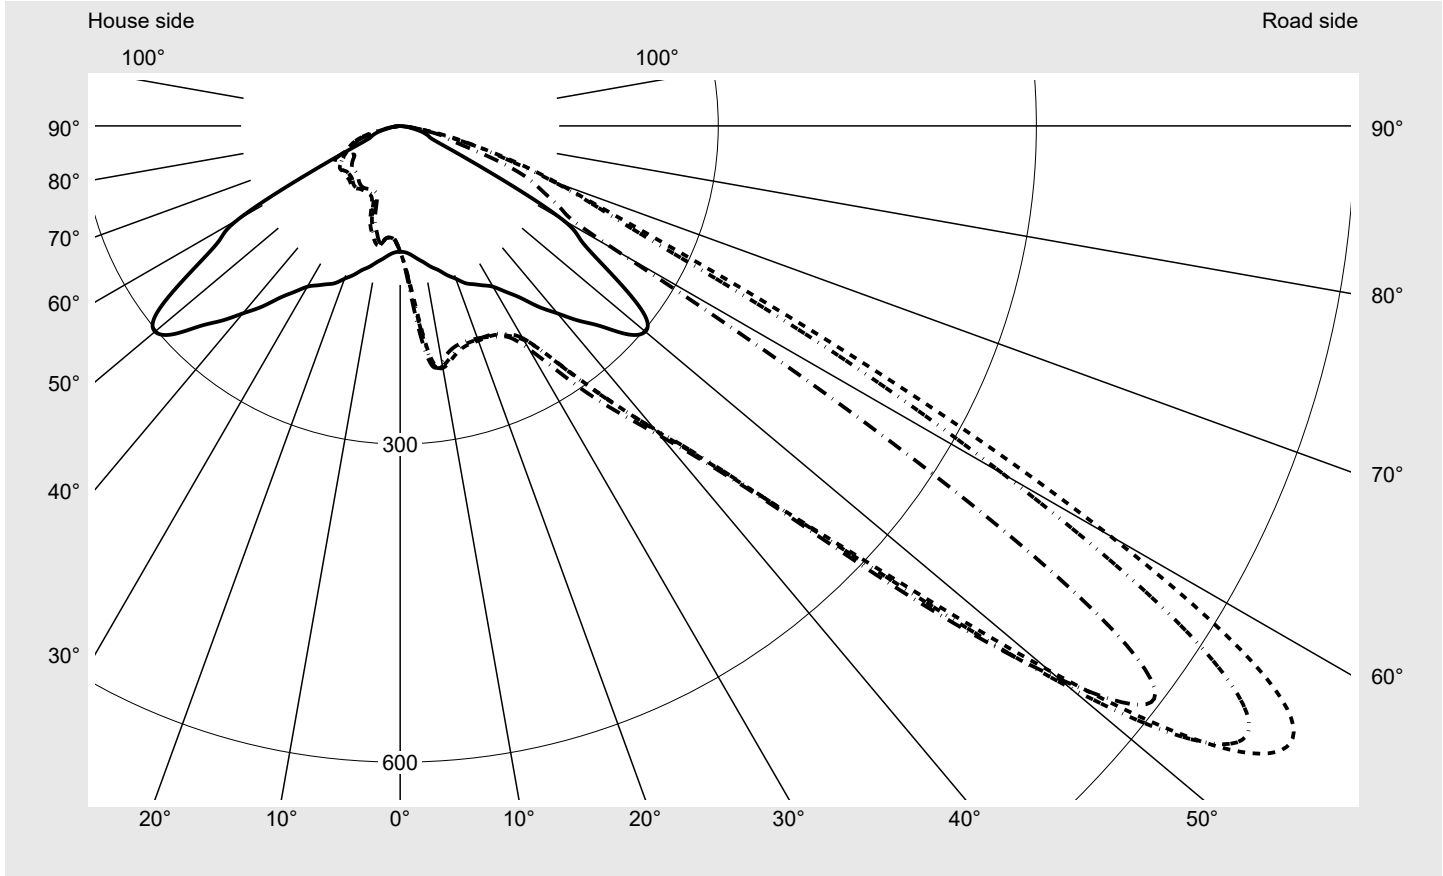

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	158.5
Imax 80°	24.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779418V01AA EAN: 4058352977668	LP number 59472_11
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 55°** **KMK 52.5°** **KMK 50°** **KMK 47.5°** **siteco**

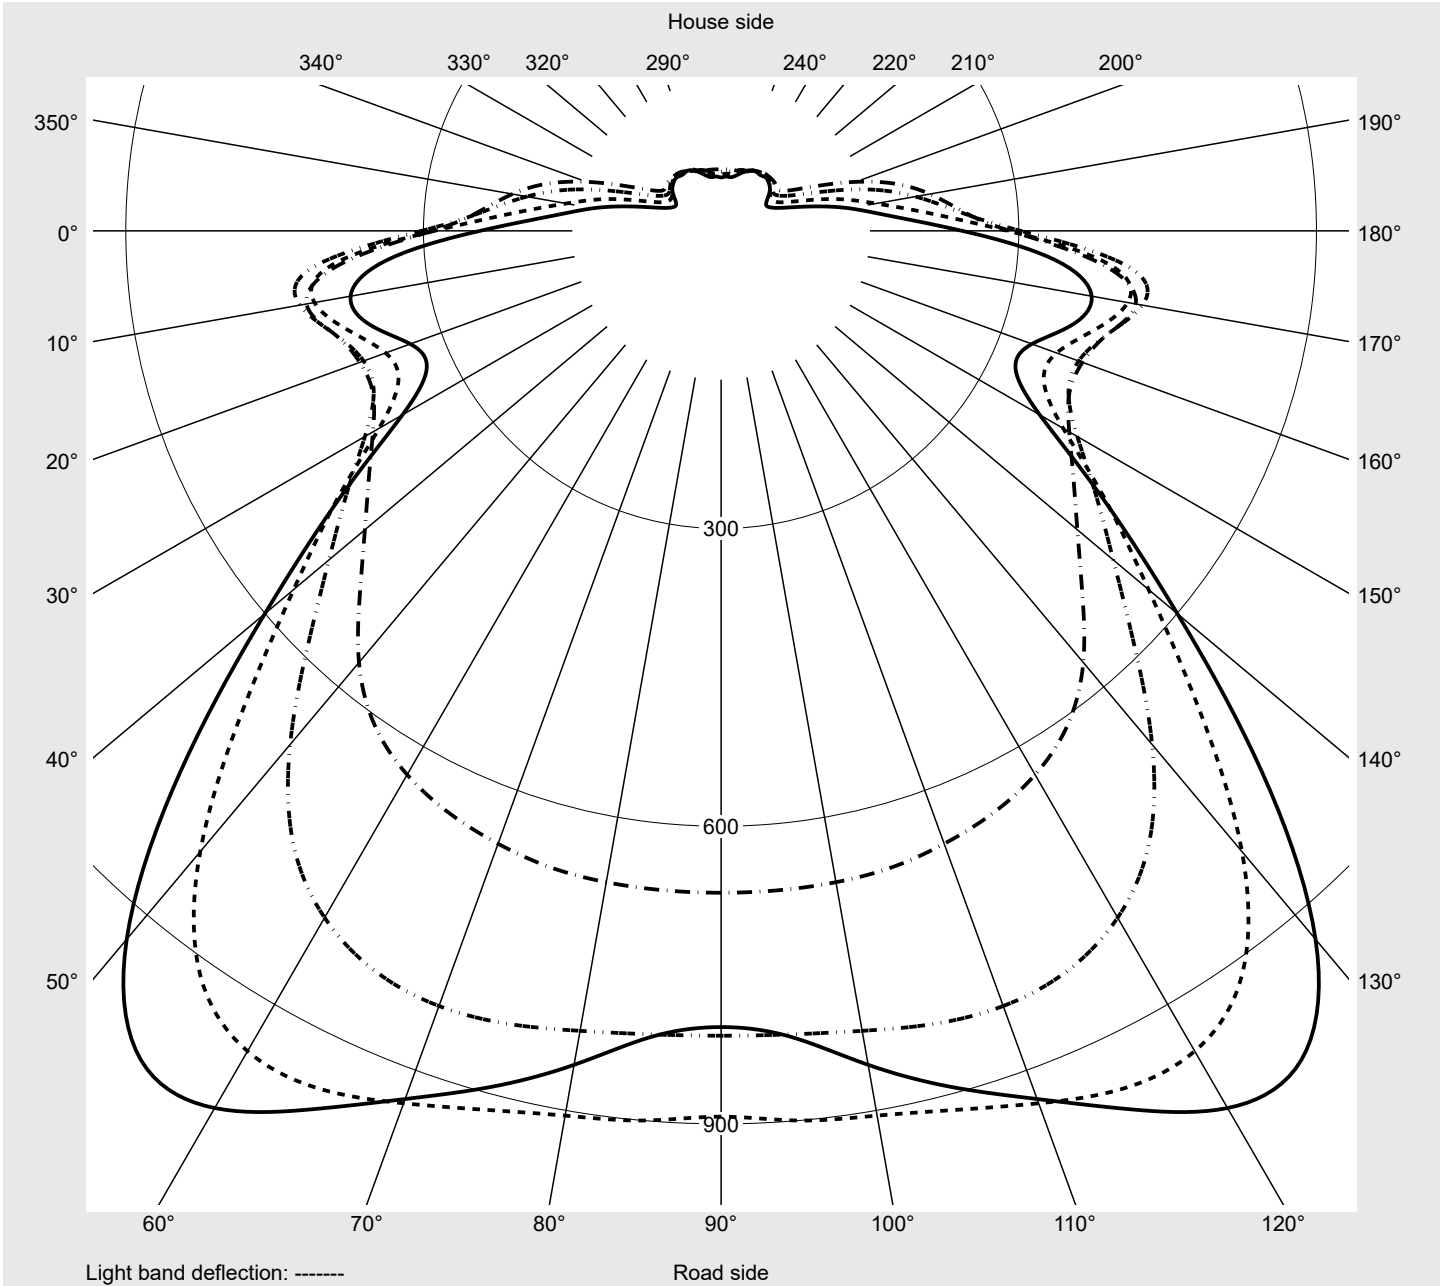

Photometric test report

Family Floodlight FL11	Order number: 5XA779418V01AA EAN: 4058352977668	LP number 59472_11
---	--	-------------------------------------



Table of values for luminous intensities Maximum luminous intensity


C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7
2,5°	119.5	120.9	122.4	124.1	125.8	127.4	129.0	130.6	132.2	133.6	134.9	135.9	137.0
5,0°	122.3	125.8	129.6	133.3	137.2	141.3	145.4	149.9	154.6	159.2	163.8	168.3	172.8
7,5°	126.5	132.0	138.1	144.5	151.3	159.4	168.6	179.1	190.2	200.5	209.2	215.6	220.2
10,0°	130.9	139.0	147.4	156.8	168.5	183.1	199.3	214.0	224.2	229.7	232.4	232.6	231.8
12,5°	136.3	146.7	157.8	172.0	191.1	212.1	226.7	234.2	236.2	234.5	231.6	228.3	225.3
15,0°	141.0	154.0	168.5	188.5	213.0	230.0	237.6	237.6	233.7	229.4	225.5	221.7	218.7
17,5°	147.6	162.6	180.1	207.1	229.0	239.2	238.8	234.4	229.6	225.5	221.6	218.4	215.9
20,0°	153.4	170.9	193.3	221.5	238.9	242.1	238.4	233.8	229.7	225.5	221.5	218.1	215.5
22,5°	160.5	179.7	207.1	234.4	245.6	244.2	241.1	237.7	233.5	228.3	223.1	218.8	215.5
25,0°	164.8	186.8	218.2	242.9	249.2	248.8	248.2	245.4	239.9	233.1	226.3	220.8	217.3
27,5°	169.6	194.1	227.7	248.3	253.8	257.5	259.1	255.6	248.6	240.1	232.1	226.6	223.3
30,0°	175.1	202.7	236.8	254.3	261.8	269.1	271.2	266.8	258.7	250.0	243.1	237.3	233.0
32,5°	185.6	216.2	250.3	266.9	276.4	284.4	285.7	279.4	271.3	265.4	260.3	255.3	254.0
35,0°	198.0	233.3	269.0	286.5	299.5	305.4	301.8	293.4	289.7	288.9	288.0	288.1	288.1
37,5°	215.2	255.7	292.3	314.0	330.8	328.0	314.6	310.7	315.3	321.3	326.6	328.3	328.4
40,0°	230.8	280.3	323.6	349.8	357.7	344.6	332.6	335.8	347.0	361.7	372.5	376.1	375.0
42,5°	249.1	308.5	362.0	378.6	371.0	360.8	358.1	365.9	384.0	406.1	425.1	432.5	430.8
45,0°	267.0	343.3	395.4	393.0	380.0	376.1	384.1	400.6	425.2	456.4	489.1	508.7	514.6
47,5°	290.9	385.2	424.4	403.1	387.5	387.2	405.2	433.4	468.7	514.7	567.8	608.5	632.9
50,0°	301.8	411.6	431.0	402.8	383.5	386.3	414.5	460.4	516.0	588.4	675.8	752.3	799.3
52,5°	288.8	393.5	416.1	388.3	359.8	358.9	398.1	473.0	562.4	681.0	816.7	915.4	954.6
55,0°	242.9	338.1	379.2	366.2	333.3	327.3	370.8	469.1	600.3	770.6	932.0	1019.8	1020.8
57,5°	203.2	264.4	322.8	325.6	307.1	308.2	353.7	473.3	645.9	816.0	952.7	1011.0	967.8
60,0°	176.9	218.8	282.7	301.7	302.6	320.1	369.6	512.6	680.9	794.2	870.1	863.1	772.6
62,5°	100.6	147.9	213.6	250.4	276.8	321.6	416.7	580.8	682.3	701.5	658.3	589.3	526.4
65,0°	52.2	75.3	126.0	166.1	202.5	264.7	379.0	503.6	557.9	482.0	403.1	361.8	327.9
67,5°	33.4	45.5	77.7	114.5	140.6	173.8	233.5	302.4	314.1	261.9	219.3	214.6	215.7
70,0°	28.7	34.1	45.8	69.0	93.0	107.1	129.9	149.4	153.2	125.9	115.4	137.6	158.5
72,5°	25.2	28.2	29.2	34.1	48.0	59.5	67.5	60.0	40.3	46.0	63.2	93.8	115.2
75,0°	20.6	22.2	23.2	28.6	30.2	39.7	42.5	26.8	29.1	36.0	44.1	60.6	76.0
77,5°	14.1	15.7	16.9	21.3	23.0	28.4	27.9	21.0	21.6	26.1	29.9	41.2	49.7
80,0°	9.2	10.0	12.2	14.4	17.3	18.2	18.2	15.6	14.4	17.4	17.5	22.6	24.0
82,5°	5.5	6.1	8.1	9.6	11.7	12.6	11.7	10.1	8.6	9.8	9.7	9.9	10.0
85,0°	2.5	3.0	4.2	5.3	6.0	6.3	5.6	4.6	3.6	2.8	2.7	2.8	3.0
87,5°	0.9	1.1	1.3	1.4	1.5	1.4	1.2	1.0	0.9	0.8	0.9	0.9	0.9
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779418V01AA EAN: 4058352977668	LP number 59472_11
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7
2,5°	138.0	138.7	139.3	140.0	140.8	140.9	117.9	116.5	115.3	114.2	113.1	112.3	111.5
5,0°	176.8	180.1	183.0	185.2	187.0	187.5	119.2	116.4	114.1	112.2	110.6	109.4	108.5
7,5°	223.1	225.2	226.1	226.7	227.2	227.5	121.5	117.5	114.4	112.0	110.5	109.5	108.6
10,0°	230.2	228.7	227.2	226.2	225.6	225.7	124.0	118.8	115.2	113.0	111.5	110.5	109.9
12,5°	222.6	220.6	218.9	217.8	217.0	217.1	127.0	120.4	116.4	114.3	113.1	113.5	115.7
15,0°	216.5	215.1	214.1	213.3	212.9	213.3	129.6	121.8	117.7	115.8	116.6	119.5	120.5
17,5°	214.4	213.4	212.7	212.3	212.1	212.5	133.2	124.3	119.9	119.3	122.7	123.3	120.9
20,0°	214.1	213.6	213.2	213.0	213.1	213.3	137.1	127.4	123.4	126.6	126.9	123.9	116.6
22,5°	214.3	214.4	214.7	215.0	215.1	215.5	141.6	131.5	130.1	133.5	129.8	121.1	112.4
25,0°	216.2	216.9	218.0	218.7	219.0	219.2	144.8	135.6	139.1	137.9	129.9	118.0	107.7
27,5°	221.4	221.4	222.7	224.2	224.9	225.3	148.8	141.1	148.2	141.8	128.2	114.5	99.6
30,0°	231.3	233.0	236.6	240.1	242.2	243.1	154.8	149.7	156.9	144.7	125.6	108.0	89.9
32,5°	254.6	257.7	262.7	267.4	270.4	271.7	164.4	162.0	166.2	147.7	123.8	99.9	84.5
35,0°	289.2	292.3	297.4	302.4	305.8	307.3	176.3	176.8	173.6	149.1	120.8	94.1	82.0
37,5°	329.5	331.1	334.3	338.5	341.3	342.6	189.7	187.5	178.7	151.6	120.7	94.9	82.2
40,0°	373.3	373.3	375.2	378.3	380.7	381.9	201.5	195.6	181.9	155.8	121.6	97.2	83.0
42,5°	427.9	427.5	429.7	432.8	434.9	435.9	213.0	203.0	186.2	161.1	124.4	97.5	82.2
45,0°	515.9	516.7	519.4	522.7	524.5	524.6	228.5	211.1	186.6	157.6	119.9	91.7	77.6
47,5°	647.7	657.3	664.1	666.6	667.1	667.1	241.9	213.6	182.8	144.4	107.2	82.1	71.3
50,0°	823.6	831.4	827.5	818.7	812.9	811.2	237.2	198.9	160.0	117.9	86.6	70.6	65.1
52,5°	954.4	935.7	917.1	905.4	900.0	892.7	208.7	158.6	123.3	89.3	68.1	60.6	60.6
55,0°	976.9	931.1	893.0	853.5	815.6	802.4	171.6	131.0	95.0	68.3	55.6	52.4	57.3
57,5°	866.1	761.2	674.8	597.6	539.1	514.3	155.1	115.7	79.1	56.8	48.7	47.5	53.9
60,0°	657.6	553.5	435.7	331.3	258.5	238.3	137.5	95.3	65.7	50.4	43.4	44.7	50.5
62,5°	454.3	354.9	248.8	185.2	174.2	172.9	91.7	61.1	55.6	46.0	39.3	39.9	45.7
65,0°	283.3	224.2	165.4	154.7	151.8	150.6	55.4	44.9	47.1	42.1	36.8	36.0	39.7
67,5°	203.8	163.6	142.4	137.1	134.0	131.8	39.2	38.4	38.9	37.8	35.3	33.6	35.9
70,0°	154.3	127.7	119.4	113.4	105.6	101.9	29.8	33.0	35.2	34.9	32.9	30.9	33.4
72,5°	107.0	89.2	82.5	76.1	68.1	64.5	24.7	26.7	29.6	29.3	27.7	26.7	28.3
75,0°	73.6	60.1	54.2	53.5	49.0	46.2	21.4	23.0	23.8	23.4	22.6	21.8	21.8
77,5°	43.5	36.8	35.5	41.0	40.5	37.4	15.8	17.8	17.7	16.9	17.1	16.0	15.3
80,0°	22.6	21.6	21.1	23.7	20.1	17.7	10.0	11.6	11.6	11.4	11.2	10.3	9.6
82,5°	9.7	9.3	9.3	9.6	7.9	7.0	5.9	6.6	7.0	7.0	6.5	5.9	5.5
85,0°	2.9	2.8	2.5	2.4	2.3	2.3	2.8	3.2	3.6	3.2	3.0	2.9	2.6
87,5°	0.9	0.9	0.9	0.9	0.9	0.9	1.0	1.1	1.2	1.2	1.2	1.1	1.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779418V01AA EAN: 4058352977668	LP number 59472_11
Table of values for luminous intensities		Maximum luminous intensity
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	118.7	0.2	0.2
2,5°	110.8	110.2	109.6	109.2	108.8	108.5	108.3	108.2	108.1	107.7	107.7	1.5	1.6
5,0°	107.8	107.2	106.7	106.4	106.0	105.7	105.5	105.4	105.2	105.0	104.9	3.2	4.8
7,5°	107.8	107.1	106.8	106.9	107.4	107.9	108.5	109.0	109.3	109.4	109.3	5.4	10.2
10,0°	110.4	111.9	113.3	113.9	114.3	114.1	113.5	112.9	112.3	111.8	111.4	7.6	17.8
12,5°	117.2	117.6	116.5	114.2	111.2	108.5	106.4	104.7	103.5	102.6	102.2	9.6	27.4
15,0°	119.4	115.6	111.1	107.2	103.5	100.3	97.6	95.5	93.8	92.6	92.0	11.4	38.8
17,5°	115.0	109.5	104.3	99.2	93.8	88.0	82.5	78.0	75.0	73.3	72.6	13.1	51.9
20,0°	109.9	103.3	95.5	86.2	78.0	72.9	70.2	68.6	67.6	67.0	66.7	14.9	66.8
22,5°	104.0	93.0	81.4	74.7	71.6	69.7	68.3	67.3	66.5	66.0	65.8	16.7	83.5
25,0°	94.5	81.7	75.5	72.3	70.4	69.0	68.0	67.2	66.6	66.1	65.9	18.7	102.3
27,5°	85.0	77.8	73.8	71.4	70.0	69.2	68.6	67.9	67.4	67.0	66.8	20.9	123.1
30,0°	80.9	76.0	72.9	71.0	70.0	69.5	69.1	68.5	68.0	67.6	67.6	23.4	146.5
32,5°	78.2	74.6	72.3	71.0	70.5	70.3	69.7	68.9	68.2	67.7	67.5	26.6	173.1
35,0°	76.1	73.5	72.5	72.4	72.0	71.2	70.0	68.6	67.5	66.7	66.3	30.5	203.6
37,5°	75.6	73.3	73.4	73.8	73.0	71.1	69.0	67.1	65.5	64.6	64.3	35.1	238.7
40,0°	76.1	74.0	73.9	74.0	72.1	69.3	66.7	64.3	62.8	62.1	61.7	40.2	279.0
42,5°	76.9	74.8	73.9	72.8	70.4	67.2	64.6	62.9	61.7	61.1	60.9	46.2	325.2
45,0°	75.7	74.6	73.0	72.0	69.6	66.4	63.8	62.4	61.3	60.7	60.5	53.7	378.9
47,5°	72.1	72.9	72.8	72.1	69.5	66.2	63.7	62.7	62.6	62.2	61.9	63.4	442.3
50,0°	67.2	71.2	72.5	71.6	69.5	66.6	65.2	63.1	60.8	59.8	59.6	73.9	516.3
52,5°	64.4	69.3	71.6	70.8	69.2	68.2	63.9	60.6	58.3	57.8	57.1	81.7	597.9
55,0°	64.2	68.0	70.0	68.7	69.4	67.3	62.5	57.6	54.9	55.0	53.8	83.2	681.1
57,5°	62.3	67.1	67.2	66.0	66.6	65.8	60.2	55.2	52.9	52.6	51.1	76.1	757.2
60,0°	57.3	64.1	64.3	62.2	63.1	63.2	58.7	54.8	53.1	55.2	56.2	65.5	822.7
62,5°	51.2	57.8	61.2	58.7	58.9	59.2	57.8	56.8	62.8	70.0	69.3	53.9	876.6
65,0°	46.0	50.6	55.4	54.9	54.3	55.7	57.4	66.3	66.7	59.9	56.9	40.4	917.0
67,5°	39.9	43.1	46.6	48.3	49.4	51.9	60.8	65.3	58.0	53.0	50.7	28.1	945.1
70,0°	33.8	34.3	37.9	40.4	42.2	47.5	59.1	60.1	51.6	47.0	45.7	19.5	964.6
72,5°	26.5	26.0	26.8	30.1	34.3	41.5	47.9	49.8	43.4	38.3	37.0	12.6	977.3
75,0°	20.0	17.9	19.3	21.6	25.3	33.0	36.3	36.9	34.0	30.0	28.4	9.1	986.4
77,5°	13.7	12.6	13.0	14.9	17.2	22.7	24.4	24.6	24.0	21.6	19.8	6.5	992.8
80,0°	8.4	8.1	8.4	9.3	10.4	12.2	13.9	14.2	14.0	13.2	12.2	3.9	996.8
82,5°	4.9	4.6	4.7	5.2	5.6	6.0	6.8	6.8	6.5	6.2	5.7	2.1	998.9
85,0°	2.4	2.2	2.2	2.2	2.2	2.2	2.1	2.0	2.0	2.0	2.0	0.8	999.7
87,5°	1.1	1.1	1.2	1.2	1.2	1.2	1.2	1.3	1.3	1.3	1.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779418V01AA EAN: 4058352977668	LP number 59472_11
----------------------------------	--	------------------------------

siteco

Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	252	254	130612	1013.8
95	238	252	124882	957.3
90	223	249	118457	897.0
85	207	247	111480	832.9
80	193	244	105047	776.8
75	179	241	98501	721.0
70	165	238	91811	665.4
65	152	235	85533	614.4
60	139	232	79062	563.1
55	126	228	72457	512.3
50	113	224	65664	461.5
45	101	220	59252	415.1
40	89	216	52673	368.4
35	77	210	45978	322.6
30	66	205	39613	280.6
25	54	197	32673	235.1
20	43	189	26209	194.5
15	32	178	19748	148.1
10	21	163	13090	102.5
5	10	136	6333	55.4
1	3	91	1762	27.7

Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
94	233	251	119685	930.8
90	221	249	114736	882.7
85	206	246	108491	822.7
80	191	244	101752	763.0
75	177	241	95485	707.7
70	163	238	89094	652.3
65	150	235	83004	601.7
60	136	231	76241	547.0
55	124	228	70317	500.4
50	111	224	63644	450.1
45	99	220	57415	403.8
40	87	215	50935	357.7
35	75	209	44417	312.1
30	64	204	38167	270.7
25	53	197	31810	229.3
20	42	188	25463	189.0
15	31	177	19056	141.9
10	21	163	13027	101.5
5	10	136	6312	54.8
1	3	92	1758	27.4

Photometric test report

Family Floodlight FL11	Order number: 5XA779418V01AA EAN: 4058352977668	LP number 59472_11
----------------------------------	--	------------------------------

Luminousfluxs table



Temperature °C	Luminous flux lm	Power consumption W
10.0	131410.0	1021.7
25.0	120100.0	934.7