




# Photometric test report

<b>Family</b> <b>Streetlight 11 micro LED</b>	<b>Order number: 5XC1N51Y08CE</b> <b>EAN: 4058352918692</b>	<b>LP number</b> <b>59457_34</b>												
	<table border="0"> <tr> <td><b>Version</b></td> <td>post-top or side-entry mounting, Smart Interface up/down</td> </tr> <tr> <td><b>Optic</b></td> <td>asymmetric, extreme wide distribution with Back Light Control (ST1.0aB)</td> </tr> <tr> <td><b>Cover</b></td> <td>transparent, PMMA</td> </tr> <tr> <td><b>Lamps</b></td> <td>LED 3000 K   CRI ≥ 70</td> </tr> <tr> <td><b>Controlgear</b></td> <td>EVG SITECO iQ - Smart Interface</td> </tr> <tr> <td><b>Rated values</b></td> <td>Net luminous flux = 1580 lm Power consumption = 12.3 W Luminous efficacy = 128.5 lm/W</td> </tr> </table>	<b>Version</b>	post-top or side-entry mounting, Smart Interface up/down	<b>Optic</b>	asymmetric, extreme wide distribution with Back Light Control (ST1.0aB)	<b>Cover</b>	transparent, PMMA	<b>Lamps</b>	LED 3000 K   CRI ≥ 70	<b>Controlgear</b>	EVG SITECO iQ - Smart Interface	<b>Rated values</b>	Net luminous flux = 1580 lm Power consumption = 12.3 W Luminous efficacy = 128.5 lm/W	<b>serial documentation</b> <b>27.09.2023</b>  
<b>Version</b>	post-top or side-entry mounting, Smart Interface up/down													
<b>Optic</b>	asymmetric, extreme wide distribution with Back Light Control (ST1.0aB)													
<b>Cover</b>	transparent, PMMA													
<b>Lamps</b>	LED 3000 K   CRI ≥ 70													
<b>Controlgear</b>	EVG SITECO iQ - Smart Interface													
<b>Rated values</b>	Net luminous flux = 1580 lm Power consumption = 12.3 W Luminous efficacy = 128.5 lm/W													

**Luminous intensity in cd/klm** C180-0 C195-15 C200-20 C270-90 **Imax: 754 cd/klm**

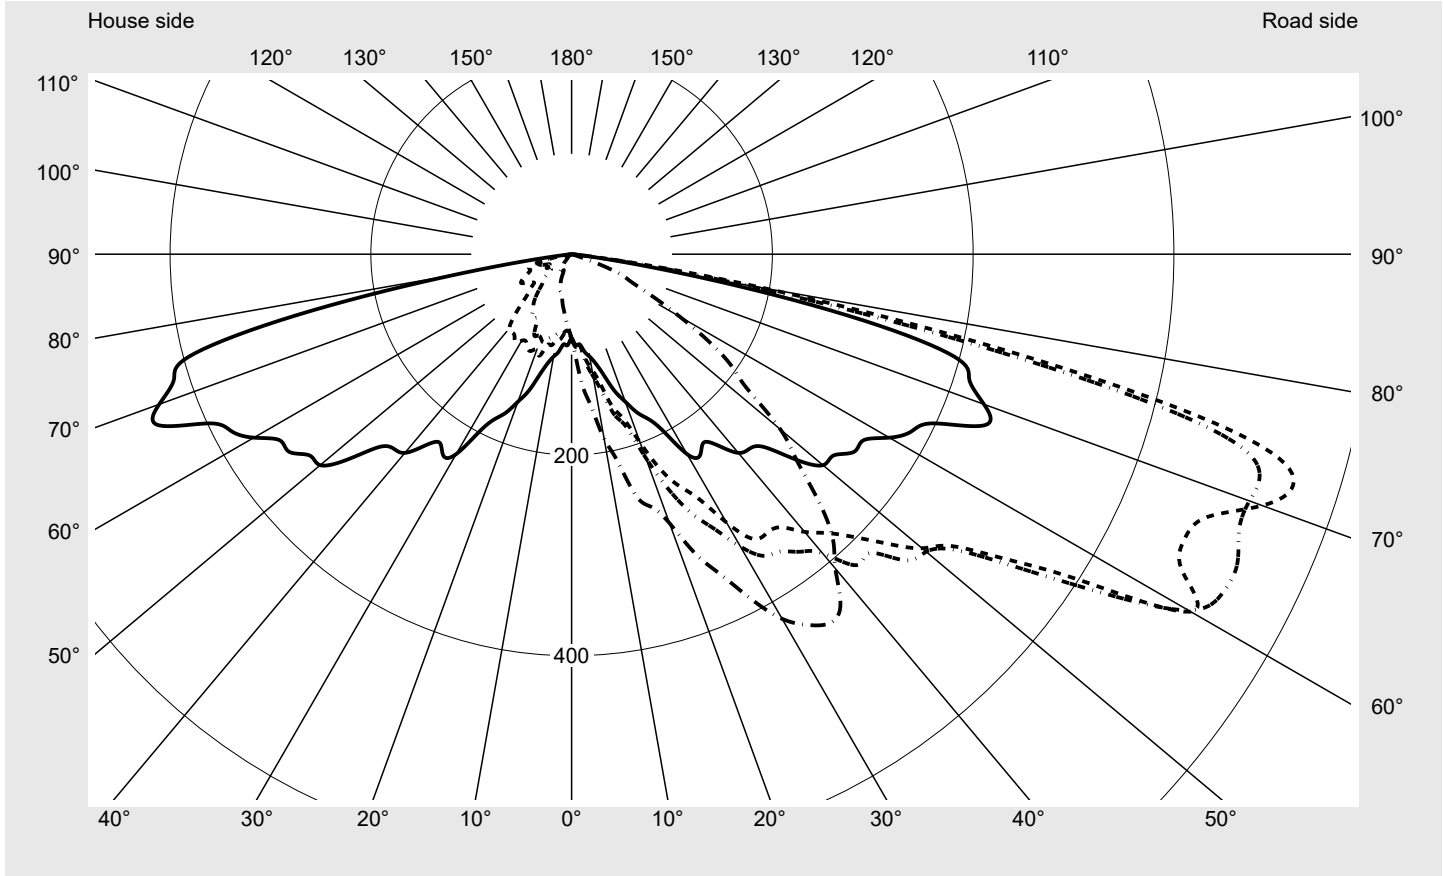

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G1
Imax 70°	742.9
Imax 80°	194.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1N51Y08CE</b> <b>EAN: 4058352918692</b>	<b>LP number</b> 59457_34
---	--	------------------------------

**Envelope curve in cd/klm**      **KMK 72.5°**    **KMK 70°**    **KMK 67.5°**    **KMK 65°**      **siteco**

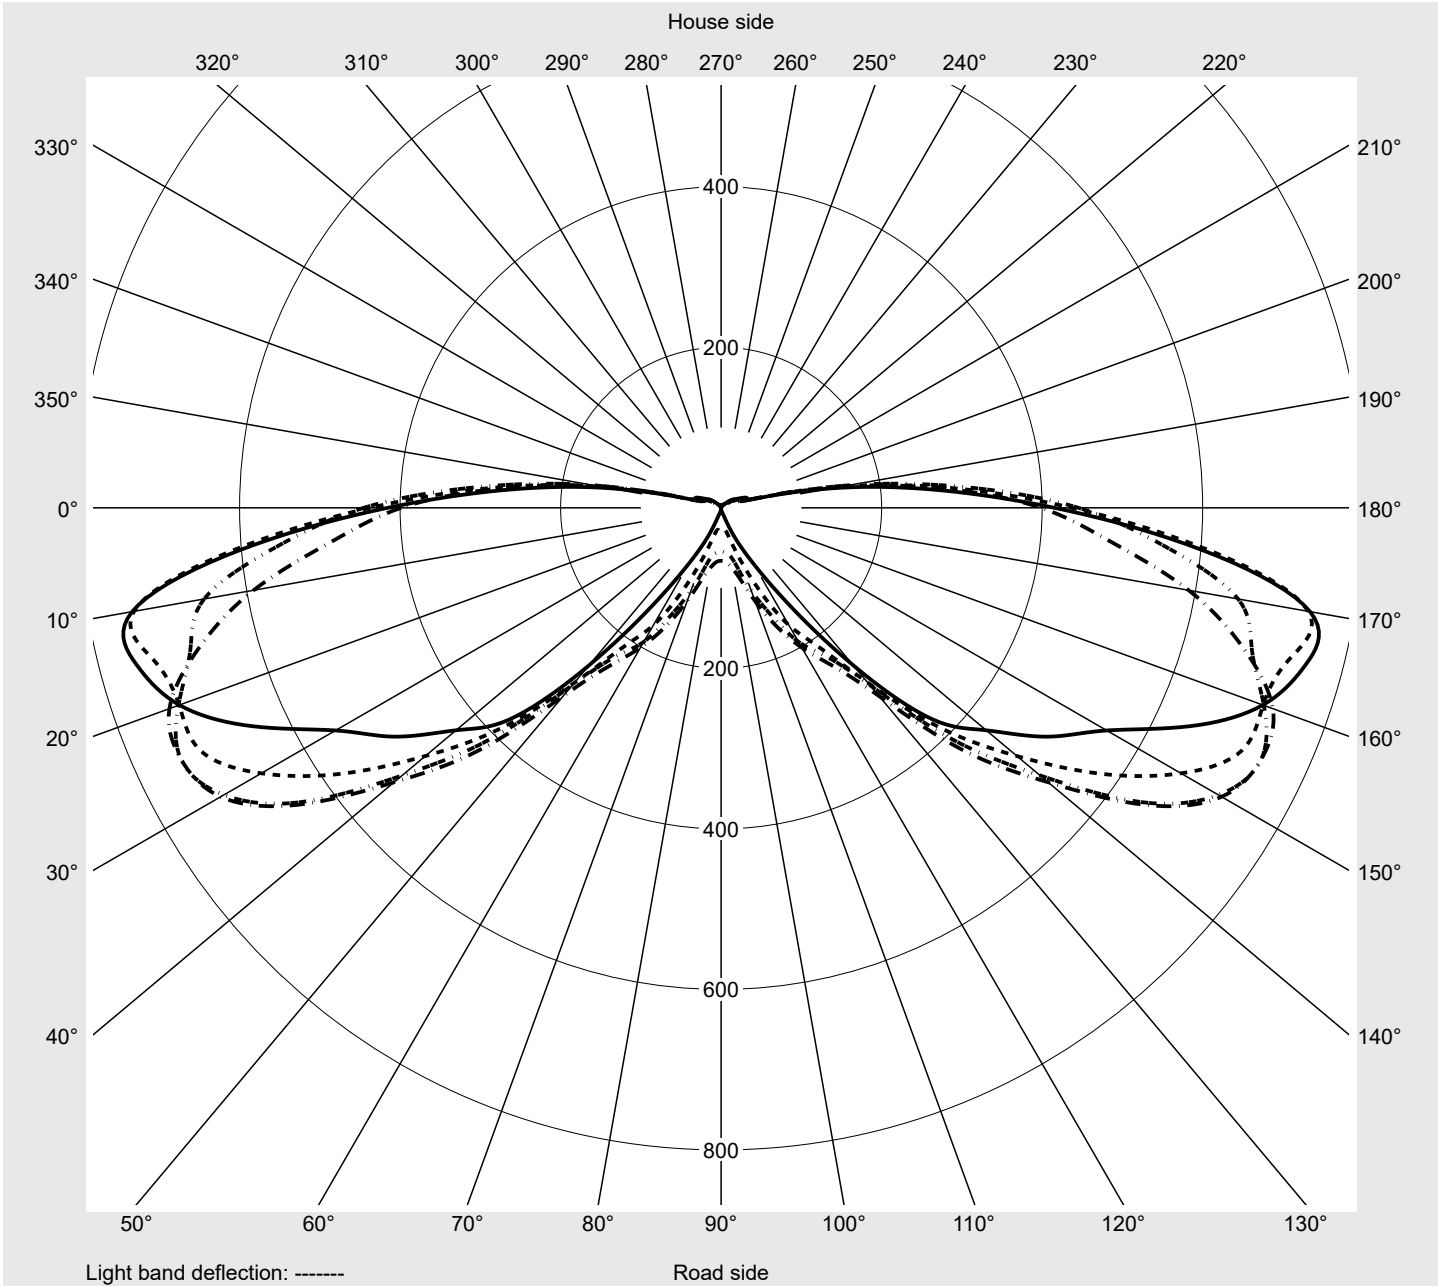

## Photometric test report

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1N51Y08CE</b> <b>EAN: 4058352918692</b>	<b>LP number</b> 59457_34
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
2,5°	90.7	90.4	89.6	89.6	92.6	95.8	96.7	97.7	98.9	99.7	99.4	98.3	98.9
5,0°	90.1	90.9	91.0	90.8	93.4	99.4	105.1	110.0	112.1	113.3	116.6	120.2	123.6
7,5°	97.8	100.7	102.4	105.0	109.4	114.0	119.6	126.7	130.4	132.5	135.6	139.9	145.0
10,0°	103.6	106.4	110.5	116.9	123.4	128.7	132.7	139.3	141.8	143.6	147.6	151.3	157.4
12,5°	111.8	117.3	123.2	132.2	141.1	147.9	152.1	158.1	165.3	172.9	180.1	185.3	193.8
15,0°	125.2	133.6	145.8	157.3	166.0	174.5	179.6	187.6	195.8	203.8	214.1	219.5	222.2
17,5°	143.2	155.5	164.5	171.9	180.0	189.8	197.5	200.1	207.5	218.4	228.9	237.2	238.4
20,0°	156.4	173.2	183.5	200.0	215.7	230.8	239.2	240.9	243.5	246.5	255.5	265.9	271.5
22,5°	170.8	187.0	210.2	232.7	254.6	270.3	278.3	280.9	284.4	287.3	295.1	302.1	306.7
25,0°	181.3	201.9	229.5	255.3	285.9	298.3	297.6	301.1	310.9	320.5	327.1	336.2	345.9
27,5°	199.6	223.0	249.0	275.0	308.8	330.8	334.2	332.9	340.4	347.8	346.0	350.2	361.3
30,0°	229.9	263.1	284.9	308.6	336.3	357.1	363.1	360.8	363.2	367.2	369.3	373.6	377.3
32,5°	237.9	268.2	303.2	336.2	356.3	370.3	380.8	388.7	395.3	396.8	395.5	398.8	401.1
35,0°	229.2	258.8	302.6	339.1	361.7	384.4	397.9	409.4	417.6	415.7	411.6	408.9	410.5
37,5°	240.5	269.2	303.8	342.9	373.6	395.9	415.8	429.1	425.2	416.6	408.2	393.8	398.7
40,0°	258.4	286.2	322.8	361.1	388.8	409.4	426.1	433.8	426.7	417.1	404.6	397.1	398.3
42,5°	262.6	307.8	341.9	376.7	420.2	432.6	432.9	449.5	450.5	420.8	402.7	394.6	390.9
45,0°	271.8	332.1	375.9	398.6	420.7	449.8	466.6	471.6	458.9	428.9	404.4	386.4	378.1
47,5°	302.7	373.9	405.2	426.9	451.5	472.8	491.1	480.4	458.4	436.1	412.4	380.6	357.9
50,0°	327.0	400.8	432.0	455.7	461.1	473.9	487.7	483.4	462.4	434.6	408.1	362.7	325.3
52,5°	329.2	407.3	456.4	477.7	484.5	499.6	505.3	497.0	463.5	423.3	381.5	334.3	311.5
55,0°	343.4	414.5	489.4	530.3	545.3	562.1	551.7	525.4	475.1	419.2	362.9	303.1	278.0
57,5°	344.9	447.4	527.2	608.8	628.7	618.3	599.7	560.8	488.5	413.0	343.5	277.3	248.3
60,0°	365.5	499.4	616.7	712.2	709.4	673.8	648.7	595.7	500.0	408.6	330.9	277.1	243.0
62,5°	382.0	492.2	604.2	686.5	731.0	714.9	688.2	618.4	525.8	415.5	317.6	258.9	222.0
65,0°	398.7	488.0	591.6	673.3	731.6	742.3	720.1	645.3	532.0	427.9	306.2	239.1	201.3
67,5°	445.3	556.0	654.2	684.7	719.6	742.5	715.5	639.3	518.7	408.5	288.1	224.4	192.8
70,0°	437.2	611.3	742.9	732.2	718.6	715.8	661.6	577.7	481.2	388.9	284.8	211.1	168.8
72,5°	415.4	601.1	745.2	754.3	718.3	643.9	554.8	497.1	431.2	372.9	256.3	146.8	79.9
75,0°	395.0	544.9	656.0	682.3	642.3	531.3	429.6	403.8	358.9	245.3	111.8	36.6	10.0
77,5°	280.5	372.5	430.3	442.8	397.4	333.4	289.5	230.9	140.4	47.1	7.8	0.0	0.0
80,0°	118.6	154.3	189.4	194.9	165.3	140.7	101.2	41.4	8.9	0.0	0.0	0.0	0.0
82,5°	22.3	28.1	36.5	41.6	37.9	27.0	8.5	0.0	0.0	0.0	0.0	0.0	0.0
85,0°	0.0	0.0	0.0	0.1	0.2	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Streetlight 11 micro LED</b>	<b>Order number: 5XC1N51Y08CE</b> <b>EAN: 4058352918692</b>	<b>LP number</b> <b>59457_34</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9
2,5°	98.6	99.1	101.0	101.8	103.4	104.7	86.5	82.9	78.7	76.7	75.0	73.9	74.2
5,0°	124.8	126.6	127.6	127.5	131.0	134.0	86.1	81.9	78.6	77.6	76.4	73.4	71.8
7,5°	147.8	149.0	148.4	151.1	154.5	154.8	94.1	89.6	85.3	81.2	77.6	75.0	71.4
10,0°	165.9	172.0	175.7	184.2	188.3	186.6	98.1	92.3	86.7	81.0	76.7	73.6	68.8
12,5°	202.3	207.5	211.3	213.9	213.7	211.2	104.3	98.4	92.9	85.1	78.2	71.2	63.9
15,0°	225.4	231.4	234.6	245.0	251.8	249.7	113.0	102.9	93.9	86.9	79.3	68.6	59.2
17,5°	239.2	244.6	249.2	255.0	260.6	264.0	129.0	117.8	105.9	92.1	77.5	68.1	58.0
20,0°	275.0	280.6	283.6	284.2	284.2	285.2	138.4	118.6	101.1	89.2	75.4	65.6	58.1
22,5°	310.7	314.2	315.9	318.0	321.4	323.4	151.1	127.7	104.3	87.8	75.3	63.7	53.3
25,0°	341.5	337.6	342.8	348.8	350.3	352.4	160.0	132.2	103.5	88.2	70.6	57.9	50.1
27,5°	374.8	380.5	383.8	387.9	388.0	387.2	175.8	140.1	98.2	74.1	61.4	53.3	44.7
30,0°	379.5	393.7	407.6	411.8	416.2	419.4	184.6	142.5	99.5	73.6	57.7	48.7	38.8
32,5°	401.0	403.5	412.2	426.4	435.0	437.9	193.3	147.6	104.0	73.3	52.0	40.1	35.2
35,0°	419.2	422.4	422.5	435.6	445.7	448.7	186.7	143.1	99.2	66.6	45.2	35.4	29.5
37,5°	415.6	427.1	432.3	432.2	436.8	440.0	190.5	143.1	98.0	62.3	42.1	34.5	27.7
40,0°	400.5	406.3	413.2	412.8	409.8	408.8	203.0	153.5	96.5	55.6	37.1	30.1	23.0
42,5°	402.4	406.8	400.1	383.3	377.8	385.5	209.2	149.2	86.1	47.7	31.6	22.6	19.0
45,0°	383.4	377.9	365.8	363.7	358.0	348.1	205.7	134.1	71.5	41.1	30.5	22.9	20.5
47,5°	353.3	337.4	324.0	320.1	311.0	304.5	216.3	128.3	59.8	39.0	26.5	22.6	19.1
50,0°	320.4	304.1	287.9	281.2	270.4	271.6	232.3	136.7	54.2	32.9	22.4	18.1	14.6
52,5°	296.6	272.2	245.6	233.2	223.2	221.0	232.0	130.6	47.1	26.1	16.7	13.2	11.8
55,0°	263.0	239.0	214.4	195.3	190.2	195.0	233.6	129.2	49.6	25.2	16.6	12.9	10.2
57,5°	227.9	202.7	178.8	161.7	157.9	162.8	233.0	141.0	52.2	21.8	12.8	11.9	9.9
60,0°	196.3	165.8	147.0	132.3	126.4	124.4	242.3	145.8	57.7	27.6	18.5	13.7	11.9
62,5°	173.7	133.9	112.3	100.0	91.8	90.8	260.8	149.2	55.4	27.0	17.3	12.9	11.5
65,0°	162.4	123.5	92.0	75.5	67.7	66.1	276.7	153.3	50.7	24.0	20.2	14.9	10.8
67,5°	147.6	109.8	75.5	60.0	56.1	54.1	300.7	161.7	45.3	26.5	24.0	17.0	11.5
70,0°	114.6	67.0	38.1	28.1	28.5	29.3	285.9	151.3	44.0	31.3	26.4	19.3	14.1
72,5°	41.7	14.3	7.3	4.1	3.4	3.6	262.8	140.2	44.5	34.2	29.4	22.5	18.5
75,0°	1.2	0.0	0.0	0.0	0.0	0.0	249.7	130.7	39.3	34.0	27.6	23.6	19.6
77,5°	0.0	0.0	0.0	0.0	0.0	0.0	174.3	91.4	26.0	27.2	24.0	19.1	12.8
80,0°	0.0	0.0	0.0	0.0	0.0	0.0	70.5	37.2	13.0	14.3	12.9	6.6	2.7
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	13.4	6.6	2.7	3.4	2.6	0.6	0.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

# Photometric test report

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1N51Y08CE</b> <b>EAN: 4058352918692</b>	<b>LP number</b> 59457_34
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	83.9	0.1	0.1
2,5°	72.4	71.5	72.1	69.9	70.0	69.5	69.6	71.1	73.1	74.4	73.9	1.0	1.2
5,0°	69.8	67.0	66.8	66.5	65.8	65.0	63.6	63.8	64.7	65.0	65.3	2.2	3.3
7,5°	66.2	63.1	60.9	59.1	58.9	56.8	55.7	57.1	56.9	56.7	57.3	3.6	6.9
10,0°	63.9	60.2	57.2	55.3	51.9	47.8	47.7	48.7	48.0	49.2	50.9	5.0	11.9
12,5°	59.7	54.4	51.3	50.0	47.1	45.9	45.2	43.9	43.5	43.8	43.9	7.0	18.9
15,0°	52.0	47.6	45.9	43.8	44.1	43.2	40.8	40.7	40.5	39.4	39.3	9.3	28.2
17,5°	51.8	47.6	44.0	40.1	37.4	33.6	32.6	33.4	35.0	36.6	37.5	11.4	39.6
20,0°	52.3	46.9	42.0	35.9	33.2	30.6	29.2	29.0	29.7	31.7	32.1	14.3	53.9
22,5°	46.0	43.7	40.1	31.9	28.8	29.6	28.2	25.0	24.4	26.4	27.1	17.8	71.7
25,0°	43.9	40.8	37.1	29.8	26.1	24.8	22.4	19.8	18.8	19.1	18.9	21.1	92.7
27,5°	38.8	35.1	31.2	27.2	24.5	22.4	20.6	20.3	20.3	19.6	18.8	24.7	117.4
30,0°	32.0	30.1	27.9	24.3	23.8	24.5	21.8	19.2	19.4	21.4	22.9	28.5	145.9
32,5°	30.5	27.8	24.4	20.6	19.6	20.3	20.5	18.6	17.3	19.6	21.7	31.9	177.8
35,0°	25.0	23.6	21.5	18.1	17.1	17.2	15.9	15.8	16.6	16.1	15.4	34.6	212.4
37,5°	22.7	21.4	18.8	15.2	14.2	13.9	13.4	15.5	15.9	13.9	13.1	36.8	249.2
40,0°	18.9	17.9	16.1	14.6	14.4	12.2	12.0	14.1	13.7	12.2	11.9	38.8	288.0
42,5°	16.9	14.0	13.4	13.7	12.5	12.1	11.5	11.0	11.5	9.4	8.3	40.9	328.9
45,0°	16.6	13.6	12.4	13.6	14.8	13.9	10.8	9.7	11.1	8.3	6.2	42.7	371.5
47,5°	13.3	12.7	12.5	11.3	11.8	12.1	10.4	9.1	8.4	6.4	5.4	44.2	415.7
50,0°	11.2	9.0	9.4	9.3	9.3	9.6	8.6	8.0	8.3	6.6	4.5	45.0	460.7
52,5°	10.2	9.2	9.9	9.0	7.5	8.3	7.7	8.5	8.3	6.1	5.8	45.4	506.2
55,0°	9.1	8.7	6.8	5.8	5.7	6.1	6.5	6.7	6.2	5.1	4.7	47.1	553.2
57,5°	9.4	8.1	7.1	6.0	4.8	4.7	4.6	5.0	5.2	4.2	2.8	49.2	602.4
60,0°	10.5	7.0	5.8	5.7	5.0	4.9	3.8	4.1	4.0	3.1	2.7	52.7	655.1
62,5°	10.0	6.9	5.5	5.6	4.5	4.2	3.7	2.7	2.1	2.2	2.4	53.3	708.4
65,0°	10.1	7.2	6.2	5.5	3.3	3.6	3.8	2.5	1.6	1.3	1.3	54.2	762.6
67,5°	8.5	7.8	6.4	4.1	2.3	2.2	2.3	2.1	1.3	1.0	1.1	55.5	818.1
70,0°	9.4	7.8	5.7	3.1	2.3	1.5	1.2	1.4	0.9	0.6	0.8	54.6	872.7
72,5°	13.7	8.3	4.8	2.2	1.1	0.4	0.3	0.5	0.4	0.0	0.0	49.9	922.6
75,0°	13.4	5.5	1.9	0.6	0.1	0.0	0.0	0.0	0.0	0.0	0.0	41.2	963.8
77,5°	6.3	1.3	0.2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	24.9	988.7
80,0°	0.8	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	9.5	998.3
82,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1.7	1000.0
85,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
87,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

<b>Family</b> Streetlight 11 micro LED	<b>Order number: 5XC1N51Y08CE</b> <b>EAN: 4058352918692</b>	<b>LP number</b> 59457_34
---	--	------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1580	12.3	12.7	12.5
95	241	252	1499	11.7	12.0	11.8
90	229	250	1424	11.0	11.4	11.2
85	216	248	1344	10.4	10.7	10.6
80	203	246	1263	9.8	10.1	10.0
75	190	243	1182	9.2	9.4	9.3
70	178	241	1107	8.7	8.9	8.8
65	165	238	1026	8.0	8.2	8.1
60	152	235	946	7.4	7.6	7.5
55	140	232	871	6.9	7.1	7.0
50	127	229	790	6.3	6.5	6.4
45	114	225	709	5.7	5.8	5.8
40	102	221	634	5.2	5.3	5.2
35	89	216	554	4.6	4.7	4.6
30	76	210	473	4.0	4.2	4.1
25	63	203	392	3.3	3.4	3.4
20	51	195	317	2.7	2.8	2.8
16	41	187	255	2.1	2.2	2.2