

Photometric test report

Family
Streetlight 11 midi LED

Order number: 5XC3J51F08ME
EAN: 4058352991879

LP number
59351_73



Version post-top or side-entry mounting
Optic asymmetric, extremely wide distribution with an additional rear light component (ST1.0ST0.5)
Cover transparent, PMMA
Lamps LED 3000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 17650 lm
 Power consumption = 124.7 W
 Luminous efficacy = 141.5 lm/W

serial
documentation
28.09.2023

siteco

Luminous intensity in cd/klm


C180-0

C200-20

C205-25

C270-90

Imax: 633 cd/klm

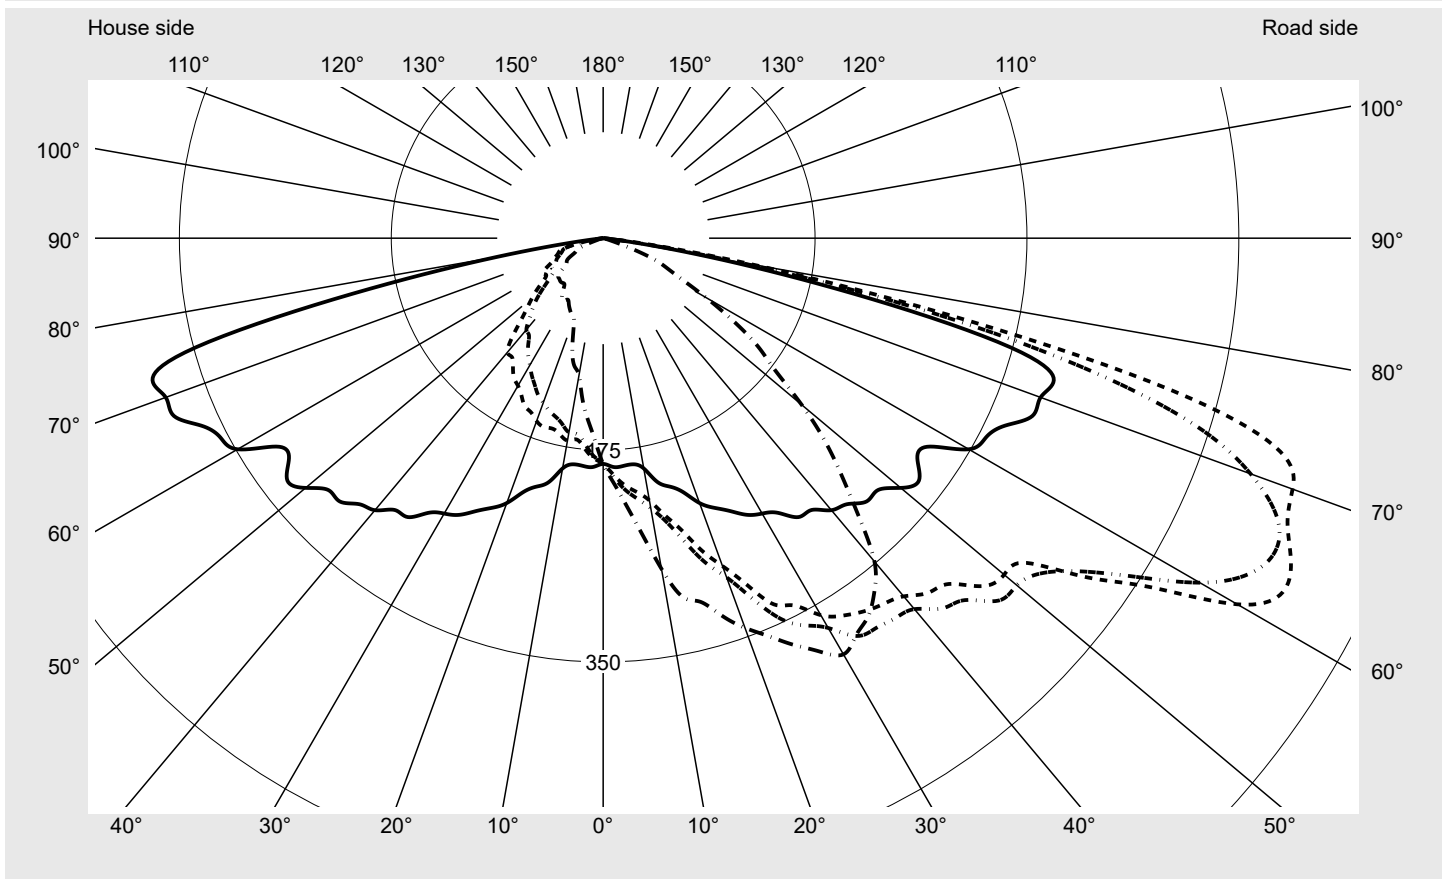

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G2
Imax 70°	629.2
Imax 80°	139.7
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3J51F08ME EAN: 4058352991879	LP number 59351_73
--	--	------------------------------

Envelope curve in cd/klm **KMK 62.5°** **KMK 60°** **KMK 57.5°** **KMK 55°** **siteco**

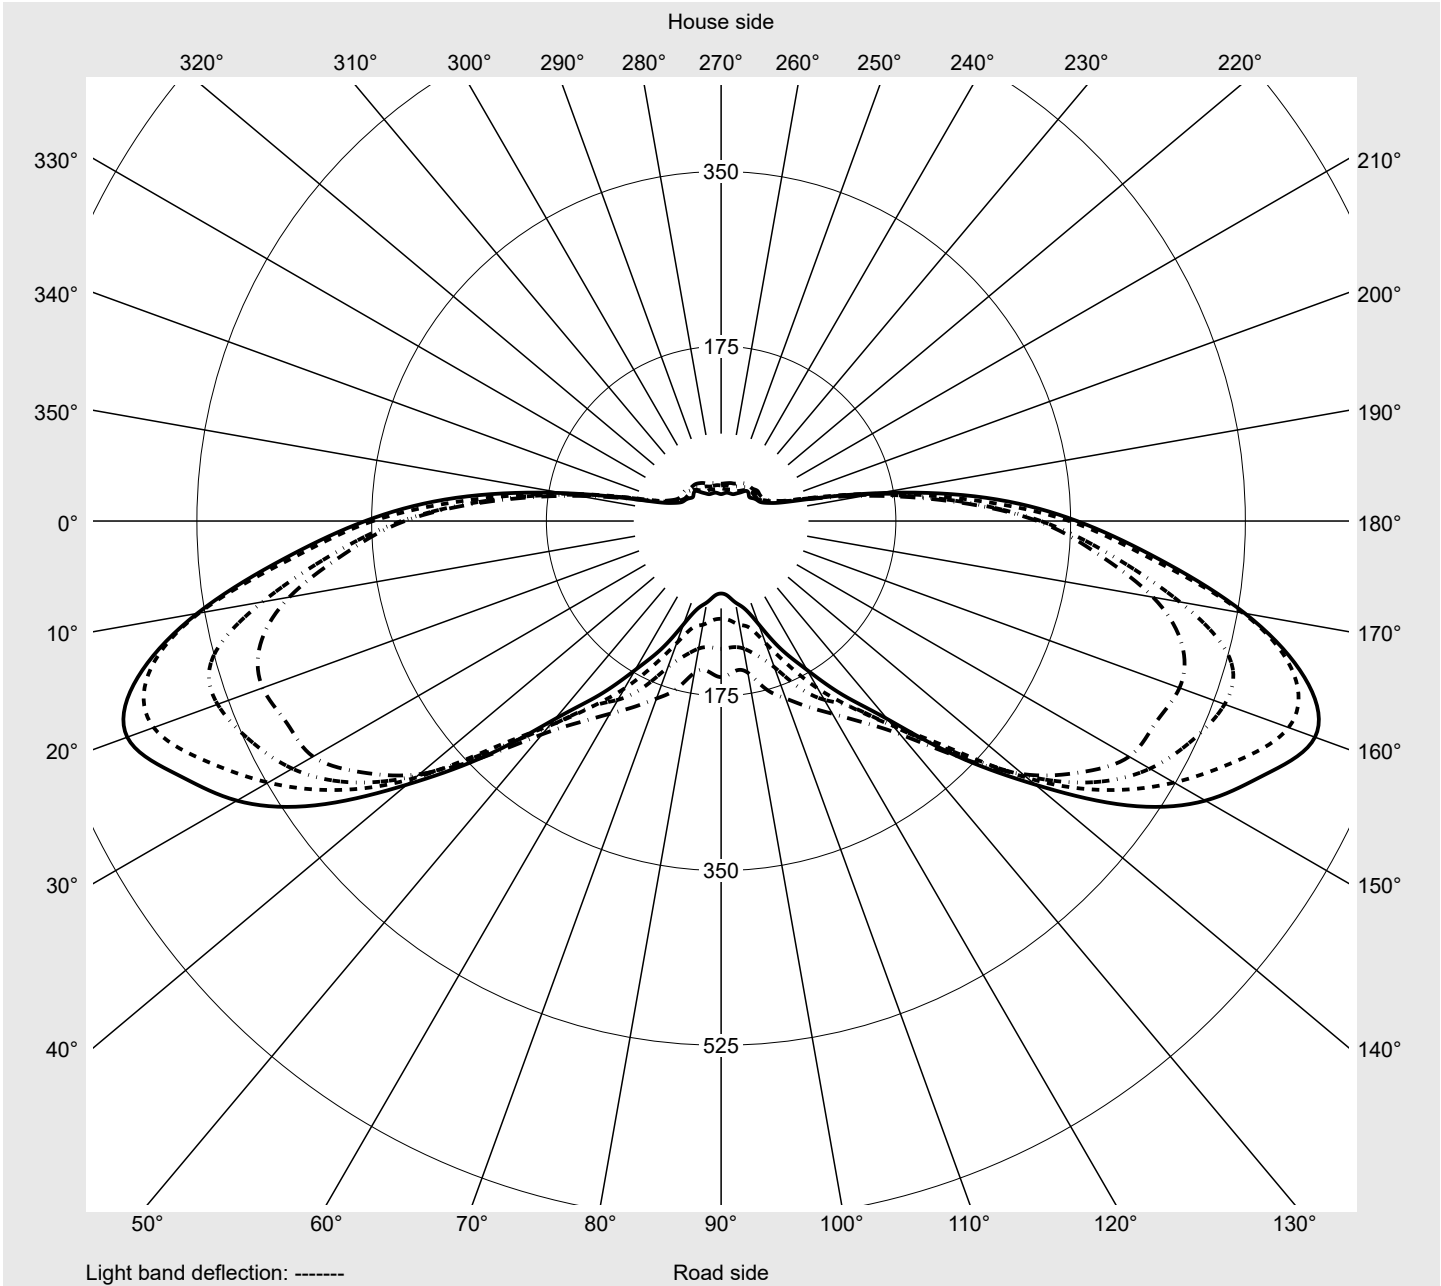

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3J51F08ME EAN: 4058352991879	LP number 59351_73
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4
2,5°	189.1	190.8	192.7	194.2	195.7	197.2	198.8	199.9	200.6	201.1	201.8	202.5	202.8
5,0°	188.9	193.0	197.2	201.2	204.8	208.6	212.0	214.5	216.9	219.2	220.0	220.3	221.0
7,5°	188.4	193.0	199.3	205.4	211.4	217.1	223.0	227.3	229.9	231.8	232.7	234.3	237.2
10,0°	193.1	198.8	206.8	213.9	219.9	226.4	232.6	239.3	244.2	249.3	254.5	257.4	260.7
12,5°	206.1	214.5	220.8	229.0	234.2	239.5	247.4	255.4	263.7	269.7	275.8	281.1	282.8
15,0°	212.4	223.0	233.6	241.8	249.4	259.1	265.4	271.2	278.7	287.0	296.3	302.5	306.5
17,5°	220.0	234.8	248.9	260.3	270.3	281.0	287.0	292.5	297.2	298.8	300.7	308.4	316.0
20,0°	232.8	246.6	256.8	271.0	288.2	298.1	309.0	320.0	321.0	323.0	320.5	321.7	328.5
22,5°	241.1	260.5	276.3	292.4	309.7	322.2	331.0	340.9	346.7	342.2	337.7	339.5	342.2
25,0°	248.7	270.3	293.7	315.2	333.7	346.8	356.0	365.1	365.2	355.8	353.6	354.5	353.5
27,5°	257.6	281.7	302.6	322.4	342.0	360.6	372.8	377.7	374.3	365.9	364.2	362.2	365.3
30,0°	262.6	288.5	312.2	342.2	359.5	371.7	384.8	388.7	385.2	379.7	380.1	374.5	372.6
32,5°	269.0	299.5	326.2	351.9	369.5	389.5	398.3	399.7	400.6	394.7	389.4	382.1	383.0
35,0°	281.2	304.9	333.4	360.8	376.1	393.0	396.5	399.9	400.2	397.3	392.2	383.8	382.1
37,5°	282.9	313.2	341.0	363.0	380.7	395.8	404.2	405.6	399.2	394.3	385.1	377.4	370.1
40,0°	293.3	324.4	349.0	369.5	386.2	399.9	411.5	406.9	400.5	388.2	373.4	363.7	354.4
42,5°	298.0	325.8	359.6	379.7	397.3	414.7	420.3	411.0	393.5	382.0	371.4	360.9	349.4
45,0°	307.6	333.9	374.0	394.1	403.9	422.7	423.7	415.2	397.5	386.4	366.4	340.7	330.5
47,5°	307.9	346.6	385.6	408.8	425.3	443.0	438.7	417.3	399.5	392.0	354.4	317.1	306.5
50,0°	320.8	363.3	394.0	416.7	432.3	445.9	447.4	426.9	402.0	371.5	339.7	306.2	280.5
52,5°	328.8	373.5	413.5	436.4	440.5	455.0	453.5	419.4	386.4	352.0	313.5	273.9	247.9
55,0°	316.8	378.8	439.2	477.8	488.5	479.6	471.8	438.8	394.3	332.9	278.8	245.8	222.9
57,5°	320.3	392.1	466.4	526.9	536.6	520.2	495.9	455.9	396.4	325.1	268.5	227.1	206.7
60,0°	348.7	432.1	530.9	593.9	604.8	569.0	523.8	469.6	400.2	320.2	267.7	227.7	193.6
62,5°	356.4	440.6	532.7	604.8	632.9	600.9	560.0	496.4	410.7	332.0	258.8	212.8	172.3
65,0°	366.3	443.3	517.3	584.8	626.7	612.3	587.0	509.4	423.9	335.1	243.0	190.5	156.0
67,5°	383.7	483.7	552.0	599.5	611.8	602.4	564.6	502.1	415.0	323.2	230.4	170.4	139.3
70,0°	384.5	510.1	619.9	629.2	605.9	569.0	499.5	446.2	376.6	305.7	212.8	153.8	121.9
72,5°	390.2	514.5	629.8	623.0	586.5	511.7	425.7	373.8	335.1	287.0	199.2	105.2	63.2
75,0°	348.2	447.8	521.6	521.4	487.1	406.3	322.5	296.1	262.0	185.8	87.8	31.9	11.7
77,5°	212.1	289.8	322.0	319.4	290.5	260.8	217.4	169.2	100.5	41.0	13.2	4.9	3.3
80,0°	89.2	118.6	134.9	139.7	125.2	107.6	78.1	36.2	11.2	4.3	3.3	3.1	2.4
82,5°	17.9	22.7	26.1	30.7	31.1	21.8	8.8	2.6	2.1	1.9	1.8	1.7	1.6
85,0°	1.5	1.6	1.6	1.6	1.7	1.6	1.4	1.3	1.3	1.2	1.1	1.0	0.9
87,5°	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.6	0.5	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3J51F08ME EAN: 4058352991879	LP number 59351_73
Table of values for luminous intensities		Maximum luminous intensity



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4
2,5°	202.5	202.1	202.5	202.6	202.6	202.6	187.3	185.4	183.6	181.9	180.1	178.0	176.6
5,0°	221.0	220.8	221.0	221.5	222.4	221.8	185.5	181.6	178.1	174.4	170.7	167.4	164.1
7,5°	239.3	240.4	242.0	243.9	245.6	246.6	183.0	177.6	172.3	167.7	163.4	159.3	155.2
10,0°	263.9	267.0	270.9	273.3	276.4	277.2	187.4	182.0	175.8	169.7	162.8	156.0	149.3
12,5°	285.7	289.2	292.2	297.0	301.3	303.4	196.2	185.7	175.5	165.7	157.0	150.2	143.8
15,0°	308.6	308.6	312.1	312.9	310.6	311.0	200.7	187.3	174.0	162.8	152.5	142.7	134.3
17,5°	320.2	320.9	325.5	328.5	328.1	327.1	205.6	190.7	176.9	163.4	149.0	136.4	126.7
20,0°	334.6	339.0	341.4	342.8	340.5	342.5	214.0	195.6	177.6	160.7	144.5	131.9	121.0
22,5°	347.0	353.5	357.9	360.0	357.2	355.5	216.2	194.8	173.9	155.7	140.2	126.0	113.6
25,0°	358.3	363.1	366.4	368.2	369.2	370.3	221.5	196.9	176.1	153.0	133.7	118.2	106.4
27,5°	370.6	372.0	376.1	380.8	383.1	384.5	228.0	200.2	172.0	146.2	127.7	111.4	96.3
30,0°	375.2	377.8	383.2	389.6	395.7	396.9	232.8	201.5	167.3	140.7	121.0	103.2	87.4
32,5°	381.9	378.9	387.4	397.0	396.9	388.8	235.0	197.9	164.2	137.0	115.2	97.2	83.2
35,0°	381.1	379.9	381.2	392.0	387.5	381.5	240.3	196.6	159.5	129.9	108.0	91.5	79.9
37,5°	369.1	368.3	371.8	377.7	373.1	368.0	240.4	196.5	155.8	123.8	100.7	86.0	76.3
40,0°	354.0	354.2	350.6	349.4	349.3	348.6	242.4	200.0	157.4	123.0	98.6	81.5	71.0
42,5°	345.7	338.7	323.3	319.1	313.5	313.2	248.0	198.0	145.5	111.5	90.0	73.1	65.3
45,0°	323.5	313.1	303.9	294.4	284.5	279.7	254.9	191.5	132.5	96.3	82.5	68.2	61.4
47,5°	299.7	280.2	265.2	258.0	250.1	248.9	246.4	178.1	117.4	85.1	74.5	64.4	57.1
50,0°	262.5	247.2	236.7	223.4	214.2	214.0	248.1	166.3	99.4	76.5	65.2	58.1	53.2
52,5°	232.0	219.3	205.9	189.3	179.9	178.8	239.2	152.3	88.0	67.8	56.8	51.5	50.0
55,0°	205.2	189.2	174.4	154.3	151.1	156.3	229.5	145.0	81.4	59.3	50.8	47.4	46.8
57,5°	183.6	155.7	139.4	129.7	126.9	127.9	234.6	151.5	86.0	56.0	47.7	43.3	42.7
60,0°	159.2	130.1	110.8	105.5	99.8	97.9	248.1	157.2	87.1	57.8	48.8	43.4	42.2
62,5°	141.2	110.0	90.9	82.9	75.2	72.6	266.5	161.1	79.6	52.8	44.4	41.8	39.5
65,0°	124.5	94.9	71.3	63.6	59.2	57.7	266.3	153.7	69.4	46.8	42.7	40.1	36.6
67,5°	109.6	77.4	57.6	49.5	46.6	45.1	261.3	139.7	59.8	43.9	40.1	38.8	36.2
70,0°	86.5	52.3	33.9	25.7	23.5	23.4	247.9	129.2	56.0	40.5	37.4	35.9	35.7
72,5°	34.2	16.1	9.8	7.3	6.8	6.6	246.9	131.3	48.5	38.4	35.3	32.2	33.0
75,0°	4.4	3.5	3.5	3.4	3.3	3.2	219.3	115.7	37.6	34.7	33.1	30.0	29.0
77,5°	2.9	2.7	2.7	2.6	2.5	2.4	142.4	71.2	23.6	24.1	24.8	21.6	18.3
80,0°	2.2	2.1	1.9	1.8	1.7	1.7	58.6	31.9	12.4	12.7	12.4	9.6	6.4
82,5°	1.5	1.4	1.3	1.2	1.1	1.1	12.1	7.1	4.0	4.1	3.7	3.1	2.9
85,0°	0.8	0.8	0.7	0.7	0.6	0.6	1.4	1.3	1.2	1.1	1.1	1.0	1.0
87,5°	0.4	0.3	0.3	0.3	0.2	0.2	0.8	0.7	0.7	0.6	0.6	0.6	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3J51F08ME EAN: 4058352991879	LP number 59351_73
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	186.4	0.3	0.3
2,5°	174.6	173.3	171.4	170.1	169.3	168.4	167.7	166.7	166.2	166.1	165.7	2.2	2.5
5,0°	160.8	158.2	156.6	154.8	153.3	152.2	151.2	150.6	150.2	149.6	149.4	4.5	7.0
7,5°	151.8	148.3	145.2	142.0	138.4	135.9	134.3	133.2	132.9	133.1	132.8	6.8	13.8
10,0°	143.7	139.6	136.5	133.7	130.7	128.0	125.1	122.0	118.0	116.0	115.0	9.3	23.1
12,5°	137.2	131.3	127.0	123.9	120.4	117.3	114.4	111.1	109.5	108.7	108.6	12.0	35.0
15,0°	127.3	121.0	115.1	110.1	105.7	102.3	100.1	98.6	98.0	98.1	98.4	14.6	49.6
17,5°	118.0	109.9	104.1	99.2	95.2	90.5	86.8	85.5	84.8	83.6	82.4	17.3	66.9
20,0°	110.9	103.7	96.9	92.5	89.0	85.4	81.1	76.8	73.5	71.6	70.7	20.2	87.2
22,5°	103.0	94.1	88.7	85.5	83.1	79.1	76.5	74.5	71.9	69.3	67.9	23.4	110.5
25,0°	96.0	86.9	80.9	78.4	74.7	70.5	68.9	67.6	65.5	64.8	65.0	26.4	137.0
27,5°	87.5	82.5	77.8	73.4	69.0	66.1	64.3	63.6	63.5	62.2	61.4	29.3	166.3
30,0°	78.4	75.5	71.2	66.7	65.6	65.1	63.9	62.5	59.9	58.6	58.6	32.3	198.6
32,5°	75.4	70.7	66.4	64.0	63.9	62.1	59.3	58.3	58.2	59.6	61.4	35.1	233.7
35,0°	72.4	67.2	62.5	61.0	61.9	58.3	54.6	53.3	56.7	59.4	59.4	37.4	271.1
37,5°	69.3	65.1	62.1	59.7	58.1	57.1	56.3	53.9	53.2	54.1	54.3	39.2	310.3
40,0°	66.3	62.2	60.1	57.4	54.3	52.9	53.5	53.8	53.6	51.5	49.8	40.7	351.0
42,5°	62.8	60.2	55.7	54.3	52.9	52.6	52.5	52.3	51.9	50.5	50.0	42.0	393.0
45,0°	60.6	58.5	53.8	53.1	53.7	51.0	52.6	54.2	50.4	49.4	50.1	43.1	436.1
47,5°	54.0	53.6	52.7	51.3	48.2	47.0	48.3	49.3	47.4	46.7	49.3	43.6	479.7
50,0°	52.0	50.4	49.2	50.8	48.9	46.0	45.8	46.3	45.8	46.3	48.3	43.8	523.5
52,5°	51.1	48.7	45.8	47.3	47.6	45.0	42.5	42.6	43.4	43.4	42.8	43.5	566.9
55,0°	47.2	45.4	45.0	45.0	43.7	42.0	39.9	39.3	38.5	37.8	37.4	43.8	610.7
57,5°	44.8	43.4	43.0	41.4	39.0	38.2	36.8	36.0	36.1	36.1	35.7	45.0	655.8
60,0°	42.0	42.4	40.9	37.6	34.7	33.2	33.3	32.6	32.4	32.3	32.8	47.5	703.2
62,5°	37.1	38.9	39.3	35.3	32.1	29.7	29.1	29.1	28.8	27.7	27.0	48.5	751.7
65,0°	35.0	35.2	34.6	30.8	27.9	26.1	24.6	24.8	26.0	25.8	24.4	48.3	800.0
67,5°	34.2	31.7	28.6	25.9	24.9	23.5	21.3	20.8	22.4	22.6	21.4	48.0	848.0
70,0°	34.1	29.7	25.8	22.2	21.0	19.9	17.3	15.5	14.7	13.8	13.3	46.3	894.3
72,5°	30.6	27.0	23.4	16.9	12.4	11.0	9.2	7.4	6.3	5.8	5.6	42.4	936.8
75,0°	25.7	20.1	13.4	8.6	6.4	5.5	5.0	4.5	4.1	3.8	3.7	33.5	970.2
77,5°	14.2	9.2	6.7	5.4	4.9	4.5	4.1	3.8	3.3	3.0	2.9	19.7	989.9
80,0°	5.1	5.0	4.8	4.3	4.0	3.6	3.2	2.8	2.5	2.2	2.0	7.8	997.7
82,5°	3.0	3.1	3.2	3.2	3.0	2.8	2.4	2.0	1.7	1.5	1.4	1.8	999.5
85,0°	1.0	1.0	1.2	1.5	1.6	1.6	1.5	1.2	0.9	0.7	0.6	0.3	999.9
87,5°	0.5	0.5	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.1	0.1	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3J51F08ME EAN: 4058352991879	LP number 59351_73
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	17650	124.7	132.2	128.4
95	241	252	16747	117.0	124.0	120.5
90	229	250	15913	110.0	116.7	113.4
85	216	248	15009	102.7	108.9	105.8
80	203	246	14106	95.7	101.4	98.6
75	190	243	13203	88.8	94.0	91.4
70	178	241	12369	82.5	87.4	85.0
65	165	238	11466	75.9	80.3	78.1
60	152	235	10562	69.4	73.4	71.4
55	140	232	9728	63.5	67.2	65.4
50	127	229	8825	57.2	60.5	58.8
45	114	225	7922	51.0	54.0	52.5
40	102	221	7088	45.4	48.0	46.7
35	89	216	6184	39.4	41.7	40.6
30	76	210	5281	33.6	35.5	34.6
25	63	203	4378	27.9	29.4	28.6
20	51	195	3544	22.7	23.9	23.3
15	38	184	2641	17.2	18.1	17.6
13	33	179	2293	15.1	15.9	15.5