

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TL12DV4FXG3C
EAN: 4058352935125

LP number
58637_217



Version cover frosted, wide distribution, high visual comfort
Lamps LED 4000 K | CRI ≥ 80
Controlgear ECG-DALI
Setting emergency light operation: 3 h
Rated values Net luminous flux = 1010 lm
 Power consumption = 5.5 W
 Luminous efficacy = 183.6 lm/W

serial
documentation
12.10.2023


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 498 cd/klm

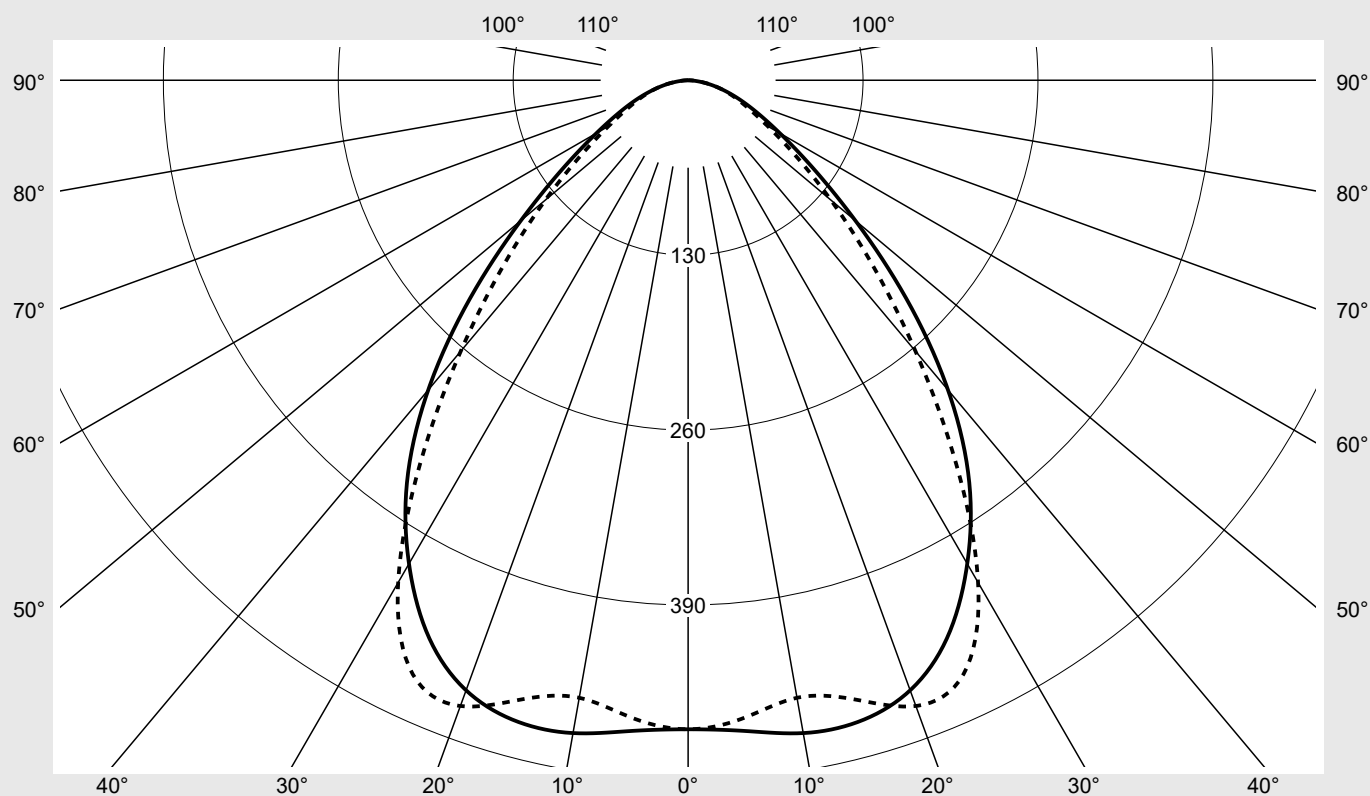

Classifications

DIN 5040 A 5 0
 CIE N1=67 N2=92 N3=99
 N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL12DV4FXG3C EAN: 4058352935125	LP number 58637_217
Table of values for luminous intensities		Maximum luminous intensity

sitEco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	482.3	482.3	482.3	482.3	482.3	482.3	482.3	2.9	2.9
5°	485.4	482.8	478.2	477.5	477.4	475.9	475.7	22.9	25.8
10°	492.7	488.2	477.9	471.3	467.6	465.9	466.0	45.2	71.0
15°	493.2	486.1	471.9	467.9	471.0	473.7	476.3	67.5	138.5
20°	482.5	473.5	462.5	471.9	487.1	492.8	494.9	89.9	228.4
25°	456.4	447.1	449.2	479.4	497.6	491.1	485.8	109.5	337.8
30°	414.9	406.8	427.0	475.1	479.0	447.1	431.1	121.4	459.2
35°	364.2	358.0	387.7	436.7	420.7	368.9	346.8	122.0	581.2
40°	300.5	296.3	322.5	357.9	336.0	284.8	262.9	110.4	691.6
45°	229.2	226.3	238.5	259.8	247.2	211.8	193.4	90.1	781.7
50°	162.3	159.3	161.6	173.6	174.5	155.2	138.5	68.2	849.9
55°	112.5	108.0	105.1	112.3	121.6	110.9	97.2	49.6	899.5
60°	78.7	73.1	68.3	73.1	83.7	77.4	68.5	35.5	935.0
65°	56.0	50.2	45.0	48.4	56.8	54.5	49.6	25.5	960.5
70°	39.5	34.5	29.5	32.1	37.8	38.5	36.6	18.1	978.6
75°	26.0	22.0	18.4	20.2	23.9	25.9	25.8	12.0	990.6
80°	14.9	12.2	9.9	10.8	13.0	14.8	15.3	6.8	997.4
85°	5.4	4.3	3.6	4.0	4.7	5.6	5.8	2.5	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL12DV4FXG3C EAN: 4058352935125	LP number 58637_217
--------------------------------	--	------------------------

UGR-Table		Standard room							siteco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	13.2	14.7	13.6	15.0	15.4	13.3	14.8	13.7	15.1	15.5
	3H	13.8	15.1	14.2	15.4	15.8	13.9	15.2	14.3	15.6	15.9
	4H	14.0	15.2	14.4	15.6	16.0	14.1	15.4	14.5	15.7	16.1
	6H	14.2	15.3	14.6	15.7	16.1	14.3	15.5	14.7	15.8	16.2
	8H	14.3	15.3	14.7	15.7	16.1	14.4	15.5	14.9	15.8	16.2
	12H	14.3	15.3	14.7	15.6	16.1	14.5	15.4	14.9	15.8	16.2
4H	2H	13.5	14.7	13.9	15.1	15.4	13.6	14.8	14.0	15.1	15.5
	3H	14.1	15.1	14.5	15.5	15.9	14.3	15.3	14.7	15.7	16.1
	4H	14.4	15.3	14.8	15.7	16.1	14.6	15.5	15.1	15.9	16.4
	6H	14.6	15.4	15.0	15.8	16.3	14.9	15.7	15.4	16.1	16.6
	8H	14.7	15.4	15.1	15.8	16.3	15.0	15.7	15.5	16.2	16.6
	12H	14.7	15.4	15.2	15.8	16.3	15.1	15.7	15.6	16.1	16.6
8H	4H	14.4	15.1	14.9	15.6	16.1	14.7	15.4	15.1	15.8	16.3
	6H	14.7	15.3	15.2	15.7	16.3	15.0	15.6	15.5	16.1	16.6
	8H	14.8	15.3	15.3	15.8	16.3	15.1	15.7	15.6	16.1	16.7
	12H	14.9	15.3	15.4	15.8	16.3	15.2	15.7	15.8	16.2	16.7
12H	4H	14.4	15.1	14.9	15.5	16.0	14.7	15.3	15.2	15.7	16.2
	6H	14.7	15.2	15.2	15.7	16.2	15.0	15.5	15.5	16.0	16.5
	8H	14.8	15.2	15.3	15.7	16.3	15.2	15.6	15.7	16.1	16.6

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 2250 B = 58	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
		γ Luminance in cd/m²					
45°	2508.1	2477.0	2610.5	2843.4	2705.3	2318.6	2116.3
50°	1954.2	1918.5	1945.8	2090.7	2101.4	1869.1	1667.7
55°	1517.8	1457.1	1418.3	1515.9	1641.4	1497.0	1311.3
60°	1218.3	1132.1	1057.6	1132.0	1294.9	1197.5	1059.5
65°	1026.2	918.6	824.6	887.0	1040.3	998.0	909.1
70°	893.5	780.3	667.9	726.3	855.0	871.6	828.9
75°	776.4	658.6	551.2	603.9	713.7	775.3	771.1
80°	662.4	542.8	440.3	482.2	577.4	661.5	682.8
85°	475.1	384.3	318.4	353.9	418.9	494.2	514.8

Photometric test report

Family
Licross® 11 Recessed

Order number: 51TL12DV4FXG3C
EAN: 4058352935125

LP number
58637_217

Luminance values in cd/m²

γ 65°

γ 70°

γ 75°

γ 80°

γ 85°

siteco

