

Photometric test report

Family
DL 11 iQ

Order number: 5XA5575NF108P00022
EAN: 4058352957004

LP number
59376_94

serial
documentation
01.02.2024



Version luminaire insert LED, Siteco® metallic grey (DB 702S), post-top- or mounting to wall arm
Optic asymmetric, extremely wide distribution (P1.0a)
Cover cover transparent, PMMA
Lamps LED 2700 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 4070 lm
 Power consumption = 33.6 W
 Luminous efficacy = 121.1 lm/W

siteco

Luminous intensity in cd/klm


C180-0

C190-10

C195-15

C270-90

Imax: 867 cd/klm

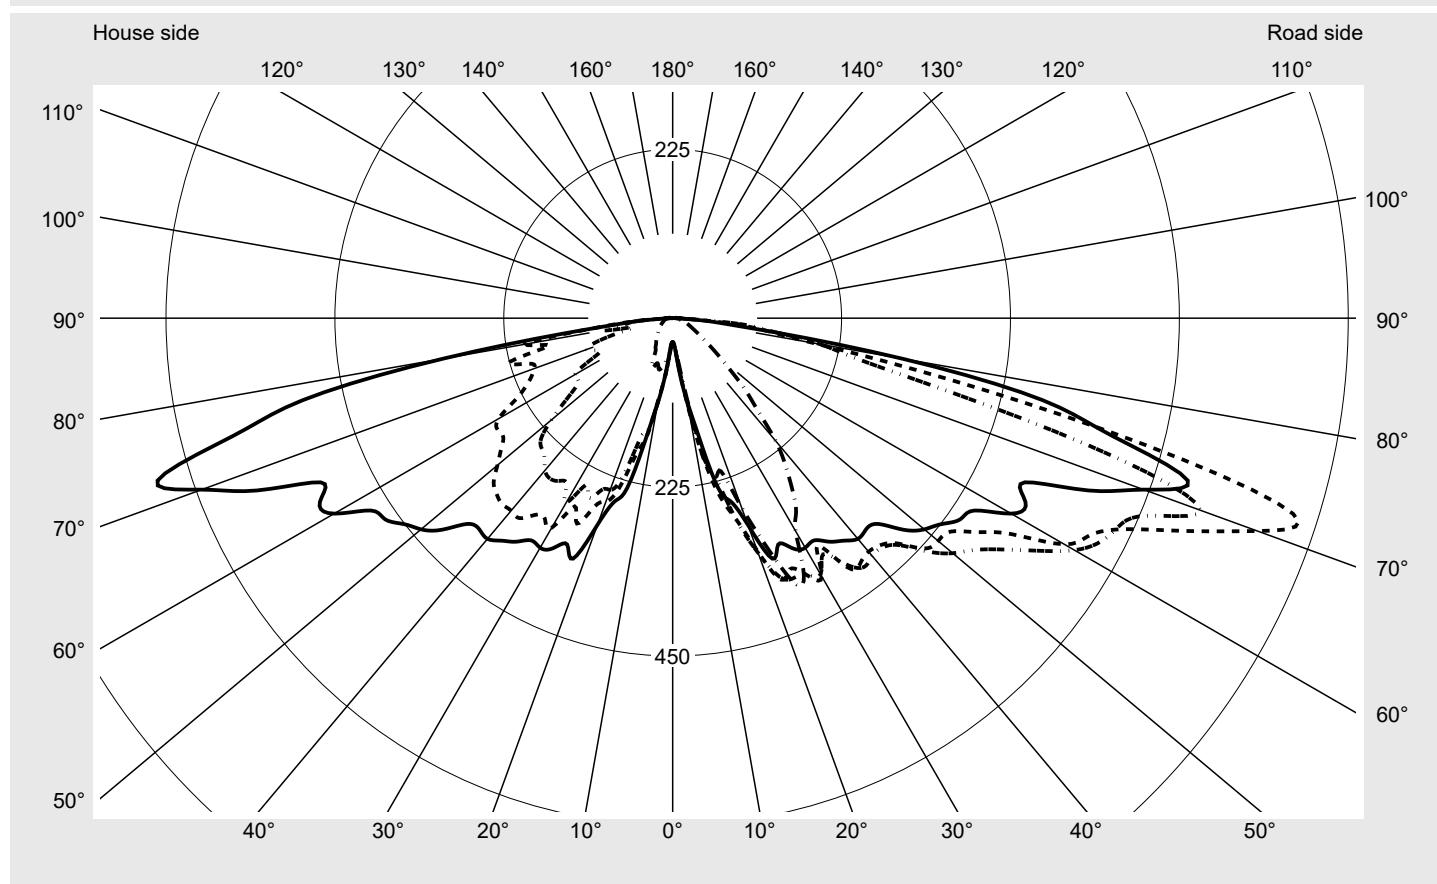

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	98.5%
Eta 90° - 180°	1.5%

Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	828.9
Imax 80°	310.5
Imax 90°	14.1
Imax >90°	6.0
Imax >95°	4.6

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
DL 11 iQ

Order number: 5XA5575NF108P00022
EAN: 4058352957004

LP number
59376_94

Envelope curve in cd/klm


KMK 72.5°

KMK 70°

KMK 67.5°

KMK 65°

siteco

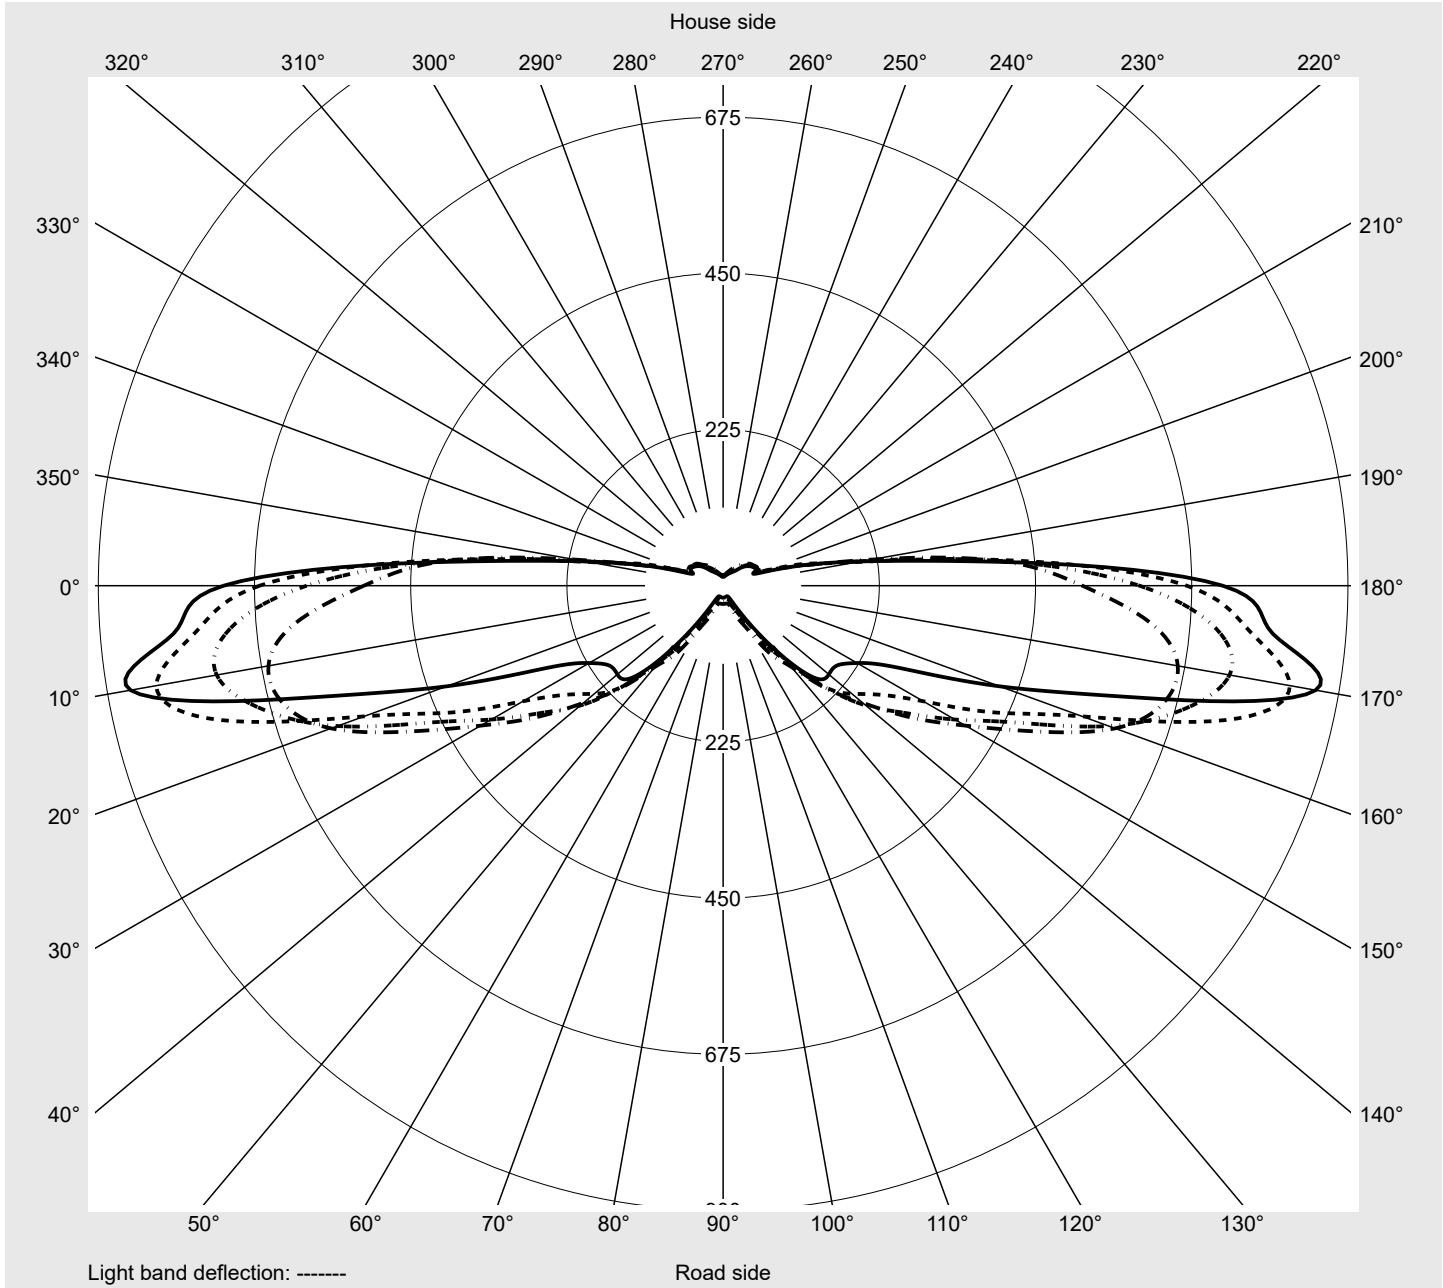

Photometric test report

Family DL 11 iQ	Order number: 5XA5575NF108P00022 EAN: 4058352957004	LP number 59376_94
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0
2,5°	33.3	33.2	33.2	33.2	33.2	33.5	34.0	34.9	35.5	35.9	36.0	35.7	35.4
5,0°	44.9	43.7	42.9	42.0	39.1	39.0	40.3	42.3	44.6	46.0	46.7	46.7	46.1
7,5°	77.7	75.1	70.9	70.5	73.3	76.9	75.2	70.1	68.1	69.2	72.6	74.2	72.9
10,0°	115.3	116.9	124.2	118.7	119.1	120.4	122.3	122.5	129.4	126.7	116.6	112.4	111.4
12,5°	162.9	181.7	193.6	190.6	185.9	182.1	184.4	182.4	180.5	182.8	188.4	194.1	185.9
15,0°	234.3	244.2	247.6	219.3	227.6	260.4	263.9	253.5	258.8	261.3	244.7	247.0	244.7
17,5°	255.5	262.2	280.9	281.4	289.6	295.3	305.5	299.5	314.0	319.6	324.8	309.8	288.0
20,0°	292.9	310.5	329.8	332.5	340.0	344.2	364.2	359.2	361.7	365.5	327.5	330.6	335.0
22,5°	346.7	370.7	377.1	373.2	369.8	377.9	374.0	353.1	349.5	353.7	355.4	353.3	348.7
25,0°	332.7	358.6	369.1	381.9	398.1	398.2	392.2	383.2	369.1	352.6	342.6	339.4	340.0
27,5°	345.6	368.3	385.1	385.3	393.4	396.3	399.2	388.8	378.2	356.3	335.4	335.6	319.5
30,0°	353.1	377.5	397.3	394.1	392.4	382.0	375.3	368.5	355.0	341.1	323.2	315.2	305.0
32,5°	350.9	350.5	358.9	373.0	390.1	398.1	396.3	383.8	349.2	338.2	321.1	304.0	283.9
35,0°	363.5	389.5	404.8	399.0	390.0	392.9	386.4	386.2	358.6	328.2	298.5	276.9	258.8
37,5°	373.6	391.6	411.0	418.1	413.9	391.4	377.4	358.1	337.4	315.3	290.2	262.3	234.3
40,0°	383.8	405.2	406.1	413.5	415.0	401.2	386.9	358.7	324.7	291.6	264.3	239.1	218.5
42,5°	381.4	402.4	410.0	414.2	413.4	393.8	381.1	352.8	314.0	279.5	245.9	211.9	199.7
45,0°	387.7	410.7	424.5	427.6	416.7	391.8	376.0	338.1	295.5	258.7	226.0	198.6	184.4
47,5°	417.2	433.4	454.2	459.9	446.4	395.7	360.2	315.6	271.5	239.3	207.9	190.5	181.1
50,0°	437.6	451.9	461.9	487.1	479.4	418.0	360.9	309.6	260.6	230.6	189.7	179.7	170.1
52,5°	450.8	475.0	466.9	507.1	486.6	449.7	378.2	310.3	253.0	211.7	176.4	169.6	154.3
55,0°	467.4	506.2	497.0	537.2	498.2	470.8	392.6	313.9	252.3	202.9	171.0	167.7	135.8
57,5°	476.8	535.3	535.5	576.6	540.5	481.7	384.3	315.4	252.1	203.1	174.5	162.9	120.9
60,0°	520.7	577.1	602.5	618.1	589.8	501.5	395.5	330.5	264.5	208.3	174.5	151.2	117.2
62,5°	529.8	590.9	626.3	643.7	628.3	512.7	402.9	335.3	270.2	212.2	174.0	138.5	103.3
65,0°	517.4	618.4	665.0	655.9	600.9	496.7	403.1	331.2	262.6	209.0	152.6	121.4	77.1
67,5°	599.8	713.2	740.8	687.2	591.1	466.4	385.6	319.4	268.4	206.0	142.5	98.5	53.5
70,0°	667.8	762.2	828.9	748.1	550.4	432.2	332.8	273.6	242.3	205.3	136.2	77.5	39.9
72,5°	719.6	794.9	866.7	623.9	423.8	280.3	222.8	200.4	198.8	188.7	131.4	67.8	29.1
75,0°	606.6	687.6	650.1	391.8	249.7	180.9	158.7	140.9	137.1	135.6	92.0	50.1	20.1
77,5°	505.1	478.4	378.2	254.4	187.9	148.3	134.0	124.5	99.0	73.6	45.8	27.3	12.9
80,0°	310.5	263.3	190.1	199.2	155.1	109.3	102.3	104.1	68.9	48.0	31.8	21.0	10.5
82,5°	117.5	104.2	123.9	132.2	114.6	83.5	90.3	77.0	42.5	25.3	19.9	15.2	8.8
85,0°	51.8	55.0	68.5	91.8	85.7	64.5	62.9	53.3	33.2	22.0	14.2	10.7	7.4
87,5°	10.8	11.0	11.6	11.7	13.0	17.6	21.2	24.6	23.3	17.6	11.2	7.7	6.2
90,0°	8.2	8.6	8.9	9.1	8.9	9.2	9.8	10.7	10.0	8.6	6.7	6.0	5.6
92,5°	5.8	5.9	5.9	5.9	6.0	5.9	5.9	5.9	5.8	5.8	5.4	5.0	4.9
95,0°	5.0	5.0	5.2	5.2	5.1	5.0	4.8	4.7	4.6	4.3	4.0	3.8	3.7
97,5°	4.6	4.6	4.6	4.6	4.5	4.5	4.3	4.1	4.0	3.8	3.6	3.5	3.3
100,0°	4.1	4.1	4.2	4.2	4.2	4.0	4.0	3.8	3.6	3.4	3.2	3.1	3.1
102,5°	3.8	3.9	3.9	3.9	3.8	3.8	3.6	3.4	3.2	3.1	3.0	2.9	2.9
105,0°	3.5	3.6	3.6	3.6	3.6	3.6	3.3	3.1	3.0	2.9	2.8	2.8	2.6
107,5°	3.2	3.3	3.3	3.3	3.3	3.3	3.1	3.0	2.8	2.8	2.6	2.5	2.5
110,0°	3.2	3.2	3.2	3.2	3.1	3.1	3.0	2.8	2.7	2.6	2.5	2.5	2.4
112,5°	3.0	3.0	3.1	3.0	3.0	3.0	2.9	2.6	2.5	2.5	2.4	2.3	2.3

Photometric test report

Family DL 11 iQ	Order number: 5XA5575NF108P00022 EAN: 4058352957004	LP number 59376_94
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0
2,5°	35.4	35.2	34.9	34.8	34.8	34.7	33.2	33.7	34.2	33.6	33.9	34.7	35.4
5,0°	44.2	43.0	42.1	41.6	41.4	41.8	46.0	48.1	49.9	51.4	52.7	53.1	53.1
7,5°	69.4	64.4	60.9	59.9	60.9	59.9	78.1	78.3	80.0	72.5	67.6	67.0	66.1
10,0°	109.2	109.3	108.6	109.5	107.2	107.7	117.2	114.5	111.7	106.0	99.5	93.3	94.8
12,5°	180.6	177.4	179.8	181.0	182.1	180.1	156.4	163.2	154.9	145.8	139.7	128.2	115.6
15,0°	245.8	240.3	232.9	229.2	224.0	219.3	216.9	187.5	164.9	160.2	158.7	148.2	143.1
17,5°	277.2	261.0	244.7	232.2	220.3	213.9	253.8	237.5	221.6	207.6	194.9	189.6	161.5
20,0°	332.4	315.4	295.0	283.8	277.0	267.8	285.2	260.1	243.3	212.8	188.3	168.4	147.2
22,5°	354.9	352.1	343.0	339.4	338.8	333.7	307.2	271.4	247.8	228.3	196.1	162.9	136.4
25,0°	351.8	352.9	362.3	382.3	393.0	391.8	317.1	301.8	264.1	227.1	186.1	145.9	122.7
27,5°	322.2	330.8	343.0	366.8	377.5	376.7	312.2	282.7	250.3	215.3	185.6	159.8	119.6
30,0°	296.9	295.1	308.5	324.8	329.8	327.4	326.5	322.3	283.9	222.9	179.3	147.5	101.5
32,5°	273.6	275.0	289.8	303.6	306.8	306.1	337.4	316.9	263.2	214.9	178.8	130.7	90.3
35,0°	253.1	257.9	269.4	278.2	279.2	277.5	342.2	319.9	264.7	210.3	168.7	109.8	88.6
37,5°	226.6	234.4	245.4	250.7	248.4	246.6	358.9	335.7	269.0	221.2	162.4	110.5	83.4
40,0°	211.4	216.3	218.0	220.9	214.3	213.5	360.6	334.8	264.7	214.5	144.0	108.2	66.5
42,5°	193.9	193.6	191.1	183.9	173.6	169.5	371.7	336.2	252.7	193.3	130.0	88.9	61.6
45,0°	175.6	166.2	160.9	153.2	144.2	140.1	382.7	331.6	246.3	158.6	114.8	70.8	62.5
47,5°	162.7	148.6	138.1	124.7	113.4	109.2	396.4	323.5	237.9	131.7	89.5	67.5	62.3
50,0°	149.2	127.7	114.0	100.5	89.7	85.0	395.8	304.7	210.9	119.4	71.5	64.0	59.8
52,5°	129.1	105.8	92.8	79.5	70.9	67.3	391.2	288.4	179.3	102.6	65.3	59.9	56.1
55,0°	110.5	88.4	76.2	61.7	54.8	53.3	392.8	275.6	155.5	85.2	63.5	57.5	53.8
57,5°	94.6	78.0	61.9	47.0	44.2	43.5	397.0	276.5	150.7	81.6	61.2	53.7	52.4
60,0°	89.8	58.5	45.5	37.4	36.6	36.3	410.8	267.8	151.0	82.3	57.6	53.3	52.5
62,5°	80.1	47.9	34.3	31.3	30.9	30.6	404.1	236.7	129.0	78.9	55.7	54.3	52.6
65,0°	53.7	34.7	27.0	26.1	26.3	26.3	403.8	216.2	107.0	67.1	55.1	54.7	52.1
67,5°	35.7	26.3	22.5	22.5	22.9	23.0	405.4	203.7	111.8	62.2	53.0	54.0	50.9
70,0°	26.2	20.8	19.1	19.5	20.1	20.2	417.5	196.5	121.5	60.5	53.7	55.1	50.0
72,5°	17.8	16.2	16.3	16.8	17.2	17.3	395.2	201.4	108.6	51.0	51.4	51.9	48.5
75,0°	13.7	13.8	13.9	14.2	14.2	14.0	420.1	224.5	72.7	45.9	48.4	50.5	47.6
77,5°	11.5	11.6	11.6	11.4	10.9	10.4	344.2	168.2	56.6	42.6	47.6	48.3	45.0
80,0°	9.5	9.7	9.4	8.9	8.4	8.3	252.4	198.3	93.9	40.9	46.1	45.3	43.0
82,5°	8.2	8.0	7.5	7.0	6.8	6.7	198.6	114.4	66.7	38.2	43.1	44.0	39.1
85,0°	6.8	6.4	5.9	5.6	5.5	5.6	72.0	58.9	51.6	34.8	37.9	36.4	33.0
87,5°	5.5	4.8	4.7	4.5	4.4	4.4	11.4	13.7	17.4	21.8	22.6	18.7	13.6
90,0°	5.3	4.6	4.1	4.0	3.9	3.9	8.7	10.3	12.7	14.1	12.5	10.2	8.0
92,5°	4.7	4.2	3.8	3.7	3.6	3.5	5.7	5.5	5.4	5.4	5.3	5.1	4.9
95,0°	3.6	3.5	3.4	3.3	3.2	3.2	4.9	4.8	4.7	4.7	4.6	4.4	4.3
97,5°	3.3	3.2	3.2	3.2	3.0	3.0	4.5	4.4	4.3	4.2	4.1	4.0	3.9
100,0°	3.0	3.0	3.0	2.9	2.8	2.8	4.1	4.1	4.0	3.9	3.8	3.8	3.6
102,5°	2.8	2.8	2.8	2.8	2.8	2.8	3.8	3.7	3.7	3.7	3.6	3.6	3.4
105,0°	2.6	2.5	2.5	2.5	2.5	2.5	3.5	3.4	3.4	3.4	3.3	3.3	3.1
107,5°	2.5	2.5	2.5	2.5	2.4	2.5	3.2	3.2	3.2	3.2	3.2	3.1	3.0
110,0°	2.3	2.3	2.3	2.3	2.3	2.3	3.2	3.0	3.1	3.1	3.0	3.1	2.9
112,5°	2.3	2.3	2.3	2.3	2.3	2.3	3.0	3.0	3.0	3.0	3.0	2.9	2.8

Photometric test report

Family DL 11 iQ	Order number: 5XA5575NF108P00022 EAN: 4058352957004	LP number 59376_94
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	32.0	0.0	0.0
2,5°	35.2	34.9	35.0	35.4	36.5	37.2	37.9	38.5	37.7	37.4	37.3	0.4	0.5
5,0°	52.8	53.7	56.0	56.1	54.9	51.3	48.6	47.7	47.2	47.6	46.9	1.1	1.6
7,5°	69.7	69.4	68.5	65.5	61.5	56.8	53.5	51.2	50.4	50.1	50.6	2.4	4.0
10,0°	93.2	92.2	85.3	80.0	78.6	73.3	66.1	61.2	59.7	61.6	63.5	4.9	8.9
12,5°	110.2	102.0	92.3	85.1	81.3	79.7	74.5	67.4	64.2	67.0	68.0	8.6	17.5
15,0°	133.7	121.6	111.0	95.5	82.7	76.6	75.4	70.9	67.9	70.2	70.7	13.0	30.5
17,5°	138.4	124.1	114.9	113.7	87.1	73.6	70.0	68.0	61.8	62.1	64.6	17.4	47.9
20,0°	131.4	115.1	100.8	89.4	78.0	69.4	66.4	65.9	61.6	62.9	65.2	21.9	69.8
22,5°	117.3	94.9	85.1	78.9	72.1	70.6	65.9	65.4	65.4	67.6	72.2	26.1	95.9
25,0°	108.4	79.7	68.1	65.5	64.9	65.1	60.1	55.7	57.1	58.8	61.9	29.2	125.1
27,5°	90.3	67.6	60.7	58.5	57.9	57.5	53.8	47.0	46.6	48.3	49.3	31.1	156.3
30,0°	79.8	64.4	57.5	55.5	54.0	53.3	50.0	43.0	42.1	44.4	45.7	32.6	188.8
32,5°	74.0	61.4	55.4	53.2	51.3	49.7	47.1	40.9	38.1	40.4	41.3	33.8	222.6
35,0°	67.5	55.3	52.8	51.1	49.6	47.6	44.8	39.9	35.0	37.1	38.3	35.4	258.1
37,5°	60.4	56.4	52.5	49.2	47.0	45.0	42.8	38.0	32.7	34.3	35.3	36.7	294.8
40,0°	57.9	55.6	53.2	50.6	46.6	43.3	40.0	35.6	29.5	31.8	32.6	37.4	332.2
42,5°	57.9	55.1	52.5	48.9	45.5	42.6	38.4	33.9	27.7	29.1	29.7	37.6	369.8
45,0°	58.0	55.0	52.2	48.2	44.3	40.3	36.2	32.6	27.1	27.4	27.4	37.7	407.5
47,5°	58.3	55.3	52.3	48.3	43.7	38.9	34.3	30.7	25.3	25.0	25.4	38.5	446.0
50,0°	57.5	54.7	51.5	48.4	43.3	38.2	33.1	29.1	24.2	23.4	23.7	39.1	485.1
52,5°	55.5	53.6	50.8	47.4	42.3	36.8	31.9	28.0	23.7	22.8	23.0	39.6	524.6
55,0°	53.6	52.0	49.0	45.2	40.2	35.0	30.1	26.4	22.6	21.5	21.8	40.6	565.2
57,5°	51.6	50.0	47.7	43.6	38.1	32.6	27.8	24.2	20.8	19.4	19.8	42.0	607.2
60,0°	50.1	47.1	45.1	41.1	35.3	30.1	25.6	22.1	19.0	17.7	18.2	44.5	651.8
62,5°	49.6	45.1	42.2	38.0	32.5	27.6	23.6	20.5	17.5	16.3	16.6	45.5	697.3
65,0°	49.5	43.1	38.7	34.3	29.5	25.2	21.6	18.9	16.3	15.1	15.7	45.2	742.5
67,5°	47.8	41.0	35.3	30.9	26.4	23.0	19.8	17.6	15.1	13.9	14.3	46.7	789.2
70,0°	46.5	38.7	31.8	27.3	23.6	20.7	18.3	16.5	14.6	13.1	13.4	47.4	836.6
72,5°	43.6	36.9	28.7	24.5	21.4	19.2	17.0	15.4	14.0	12.8	13.1	43.5	880.1
75,0°	41.4	35.2	26.2	22.4	19.6	17.3	15.5	13.9	12.8	11.7	11.9	34.6	914.7
77,5°	41.2	34.5	24.1	20.3	17.8	15.5	14.1	13.0	12.0	10.9	11.0	26.0	940.7
80,0°	38.8	33.4	21.8	18.5	16.4	14.3	13.1	11.9	10.6	10.0	9.9	19.3	960.0
82,5°	34.0	26.6	18.3	16.0	14.5	13.1	12.0	10.9	9.6	9.1	9.0	12.9	972.9
85,0°	23.9	17.4	15.2	13.3	12.5	11.6	10.7	9.7	8.4	8.2	8.3	8.4	981.3
87,5°	8.1	7.5	6.4	5.8	5.5	5.4	5.4	5.4	5.0	5.3	5.1	3.0	984.4
90,0°	6.6	6.8	5.7	5.3	5.1	4.8	4.8	4.8	4.4	4.6	4.4	2.0	986.4
92,5°	4.9	4.9	4.8	4.6	4.4	4.4	4.4	4.4	4.0	4.2	3.9	1.4	987.7
95,0°	4.2	4.0	3.8	3.6	3.5	3.3	3.2	3.1	2.9	2.8	2.5	1.1	988.9
97,5°	3.8	3.6	3.4	3.2	3.1	2.9	2.8	2.7	2.5	2.5	2.3	1.0	989.9
100,0°	3.4	3.3	3.1	2.9	2.8	2.6	2.5	2.4	2.4	2.3	2.1	0.9	990.8
102,5°	3.3	3.1	2.9	2.7	2.6	2.4	2.3	2.3	2.2	2.1	2.1	0.8	991.6
105,0°	3.1	2.9	2.8	2.6	2.4	2.3	2.2	2.2	2.1	2.1	2.0	0.8	992.4
107,5°	2.9	2.8	2.6	2.4	2.3	2.2	2.1	2.1	2.1	1.9	1.8	0.7	993.1
110,0°	2.9	2.6	2.5	2.4	2.2	2.1	2.1	2.1	2.0	1.8	1.8	0.7	993.8
112,5°	2.6	2.6	2.4	2.3	2.2	2.1	2.1	1.9	1.8	1.8	1.8	0.6	994.4

Photometric test report

Family DL 11 iQ	Order number: 5XA5575NF108P00022 EAN: 4058352957004	LP number 59376_94
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	3.0	3.0	3.0	3.0	3.0	2.9	2.7	2.6	2.5	2.4	2.3	2.3	2.3
117,5°	3.0	3.0	3.0	2.9	2.9	2.8	2.6	2.5	2.5	2.3	2.3	2.3	2.2
120,0°	2.8	2.8	2.9	2.8	2.8	2.7	2.5	2.4	2.3	2.3	2.3	2.1	2.1
122,5°	2.8	2.8	2.8	2.8	2.6	2.6	2.5	2.3	2.3	2.3	2.1	2.1	2.1
125,0°	2.6	2.6	2.7	2.5	2.5	2.5	2.4	2.3	2.2	2.1	2.1	2.1	2.1
127,5°	2.5	2.5	2.5	2.5	2.3	2.3	2.3	2.1	2.1	2.0	1.8	1.8	1.8
130,0°	2.3	2.3	2.3	2.3	2.2	2.1	2.1	2.0	1.8	1.8	1.8	1.6	1.7
132,5°	2.1	2.1	2.1	2.1	2.0	1.9	1.8	1.8	1.6	1.6	1.6	1.6	1.6
135,0°	2.0	2.0	2.0	2.0	1.8	1.8	1.8	1.7	1.6	1.6	1.6	1.6	1.6
137,5°	1.8	1.8	1.8	1.8	1.7	1.8	1.6	1.6	1.6	1.6	1.6	1.4	1.4
140,0°	1.6	1.7	1.6	1.6	1.6	1.6	1.6	1.6	1.5	1.4	1.4	1.4	1.4
142,5°	1.5	1.5	1.6	1.5	1.5	1.5	1.4	1.4	1.4	1.4	1.4	1.4	1.4
145,0°	1.3	1.4	1.4	1.4	1.4	1.4	1.4	1.3	1.3	1.1	1.1	1.1	1.1
147,5°	1.1	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.0	0.9	0.9	0.9	0.9
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575NF108P00022 EAN: 4058352957004	LP number 59376_94
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	2.3	2.3	2.3	2.3	2.3	2.3	3.0	3.0	3.0	3.0	3.0	2.9	2.8
117,5°	2.3	2.2	2.1	2.2	2.1	2.1	3.0	3.0	3.0	2.9	2.9	2.8	2.8
120,0°	2.1	2.1	2.1	2.1	2.1	2.1	2.9	2.8	2.8	2.8	2.8	2.8	2.7
122,5°	2.1	2.1	2.1	2.1	2.1	2.1	2.8	2.8	2.8	2.8	2.8	2.6	2.6
125,0°	2.1	2.1	2.1	2.0	2.0	2.1	2.7	2.7	2.7	2.7	2.6	2.5	2.5
127,5°	1.8	1.8	1.8	1.8	1.8	1.8	2.5	2.5	2.5	2.5	2.5	2.5	2.3
130,0°	1.6	1.6	1.6	1.6	1.6	1.6	2.3	2.3	2.3	2.3	2.3	2.3	2.2
132,5°	1.6	1.6	1.6	1.6	1.5	1.6	2.1	2.1	2.1	2.1	2.1	2.1	2.1
135,0°	1.6	1.6	1.6	1.6	1.4	1.6	2.1	2.1	2.1	2.1	2.1	2.1	2.0
137,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.8	1.8	1.8	1.8	1.8	1.8	1.8
140,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.6	1.6	1.6
142,5°	1.3	1.2	1.2	1.1	1.1	1.1	1.6	1.6	1.6	1.6	1.6	1.6	1.6
145,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.4	1.4	1.4	1.4	1.4	1.4	1.4
147,5°	0.9	0.9	0.9	0.9	0.9	0.9	1.1	1.1	1.1	1.1	1.1	1.1	1.1
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575NF108P00022 EAN: 4058352957004	LP number 59376_94
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	2.7	2.5	2.5	2.3	2.2	2.1	2.0	1.8	1.8	1.8	1.8	0.6	995.1
117,5°	2.6	2.5	2.4	2.2	2.1	2.0	1.8	1.8	1.8	1.8	1.8	0.6	995.6
120,0°	2.5	2.5	2.3	2.2	2.1	2.0	1.8	1.8	1.8	1.8	1.8	0.6	996.2
122,5°	2.5	2.4	2.3	2.1	2.0	2.0	1.8	1.8	1.8	1.7	1.6	0.5	996.7
125,0°	2.4	2.3	2.2	2.1	2.0	1.9	1.8	1.7	1.7	1.6	1.6	0.5	997.3
127,5°	2.3	2.2	2.1	2.0	1.9	1.8	1.7	1.6	1.6	1.6	1.6	0.5	997.7
130,0°	2.1	2.1	2.0	1.9	1.8	1.7	1.6	1.6	1.6	1.6	1.6	0.4	998.1
132,5°	2.0	1.9	1.8	1.8	1.8	1.6	1.6	1.6	1.6	1.6	1.6	0.4	998.5
135,0°	1.8	1.8	1.8	1.8	1.7	1.6	1.6	1.6	1.6	1.6	1.6	0.3	998.8
137,5°	1.8	1.8	1.7	1.6	1.6	1.6	1.6	1.5	1.5	1.6	1.6	0.3	999.1
140,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.5	1.4	1.4	1.4	1.4	0.3	999.4
142,5°	1.6	1.6	1.5	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.6
145,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.3	1.3	1.2	1.1	1.1	0.2	999.8
147,5°	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	0.2	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5575NF108P00022 EAN: 4058352957004	LP number 59376_94
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	4070	33.6	35.9	34.8
95	241	252	3862	31.3	33.5	32.4
90	229	250	3669	29.4	31.4	30.4
85	216	248	3461	27.3	29.2	28.2
80	203	246	3253	25.4	27.1	26.2
75	190	243	3044	23.5	25.1	24.3
70	178	241	2852	21.9	23.3	22.6
65	165	238	2644	20.1	21.4	20.8
60	152	235	2436	18.4	19.5	19.0
55	140	232	2243	16.8	17.9	17.4
50	127	229	2035	15.2	16.2	15.7
45	114	225	1827	13.6	14.5	14.0
40	102	221	1634	12.2	13.0	12.6
35	89	216	1426	10.7	11.3	11.0
30	76	210	1218	9.2	9.7	9.4
25	63	203	1009	7.8	8.2	8.0
20	51	195	817	6.6	6.9	6.8
15	38	184	609	5.2	5.5	5.4
11	28	173	449	4.1	4.4	4.2