


Photometric test report

Family LARGE BELL LED	Order number: 5XA1565E1V108 + 5NA15600XB1 EAN: 4069025073815 + 4050737087955		LP number 59565_29
	Version	suspended mounting at curved mast extension or wall bracket, Smart Interface up	serial documentation 18.03.2024
	Optic	asymmetric, wide distribution (ST1.2a)	
	Cover	enclosure, transparent	siteco
	Lamps	LED 3000 K CRI ≥ 70	
	Controlgear	EVG SITECO iQ - Smart Interface	
	Rated values	Net luminous flux = 5180 lm Power consumption = 34.3 W Luminous efficacy = 151 lm/W	

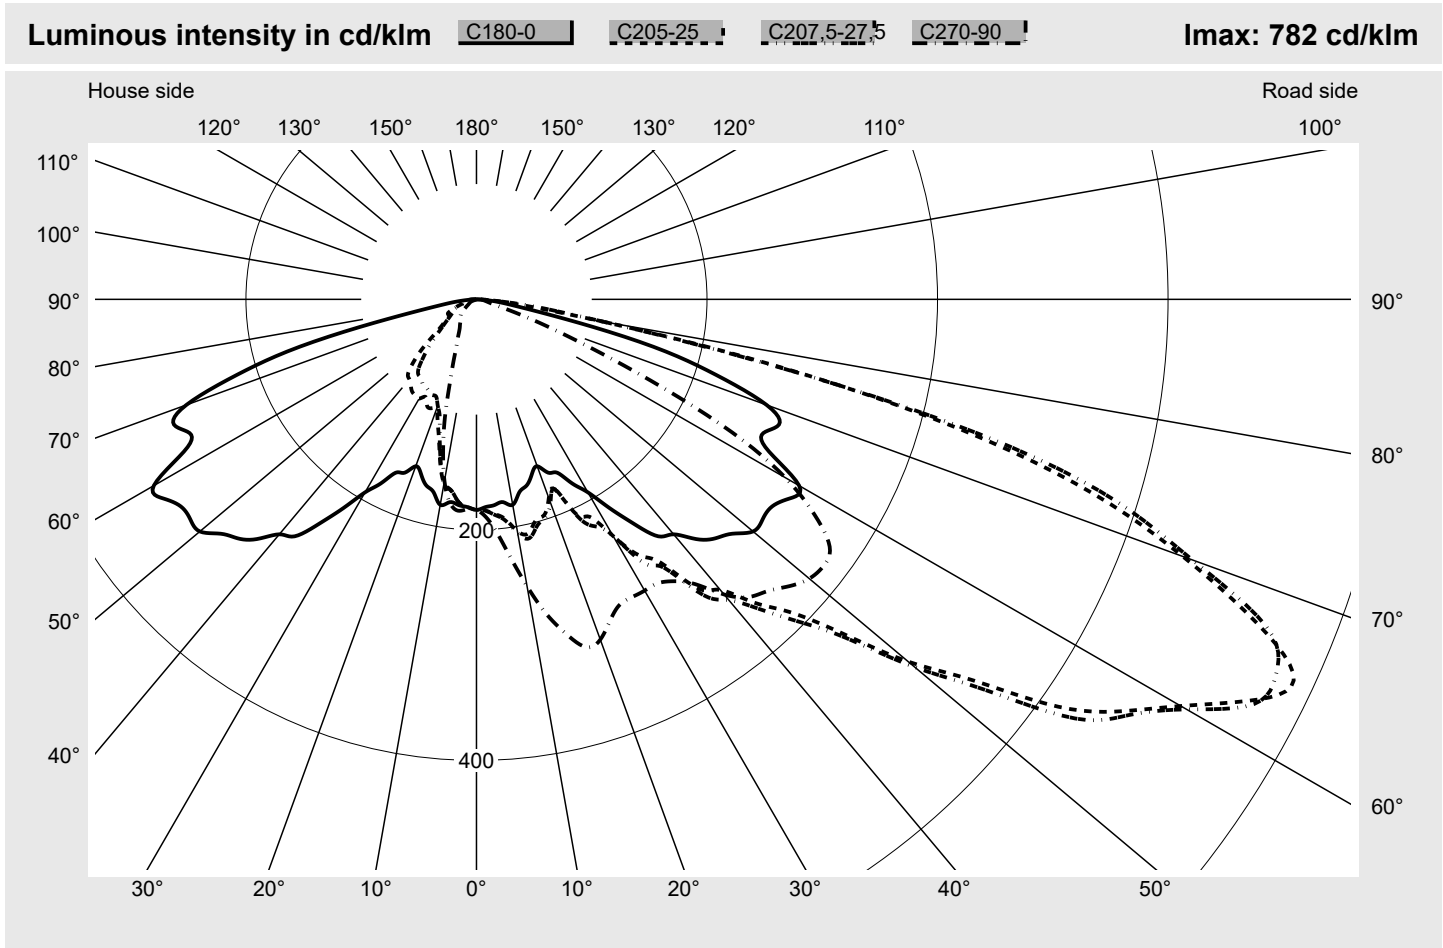

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G2
Eta 0° - 90°	99.5%	Imax 70°	661.0
Eta 90° - 180°	0.5%	Imax 80°	117.5
Measurement conditions		Imax 90°	4.0
DIN EN 13032 and DIN 5032		Imax >90°	3.2
		Imax >95°	2.1

Photometric test report

Family
LARGE BELL LED

Order number: **5XA1565E1V108 + 5NA15600XB1**
EAN: **4069025073815 + 4050737087955**

LP number
59565_29

Envelope curve in cd/klm


KMK 65°

KMK 62,5°

KMK 60°

KMK 57,5°

siteco

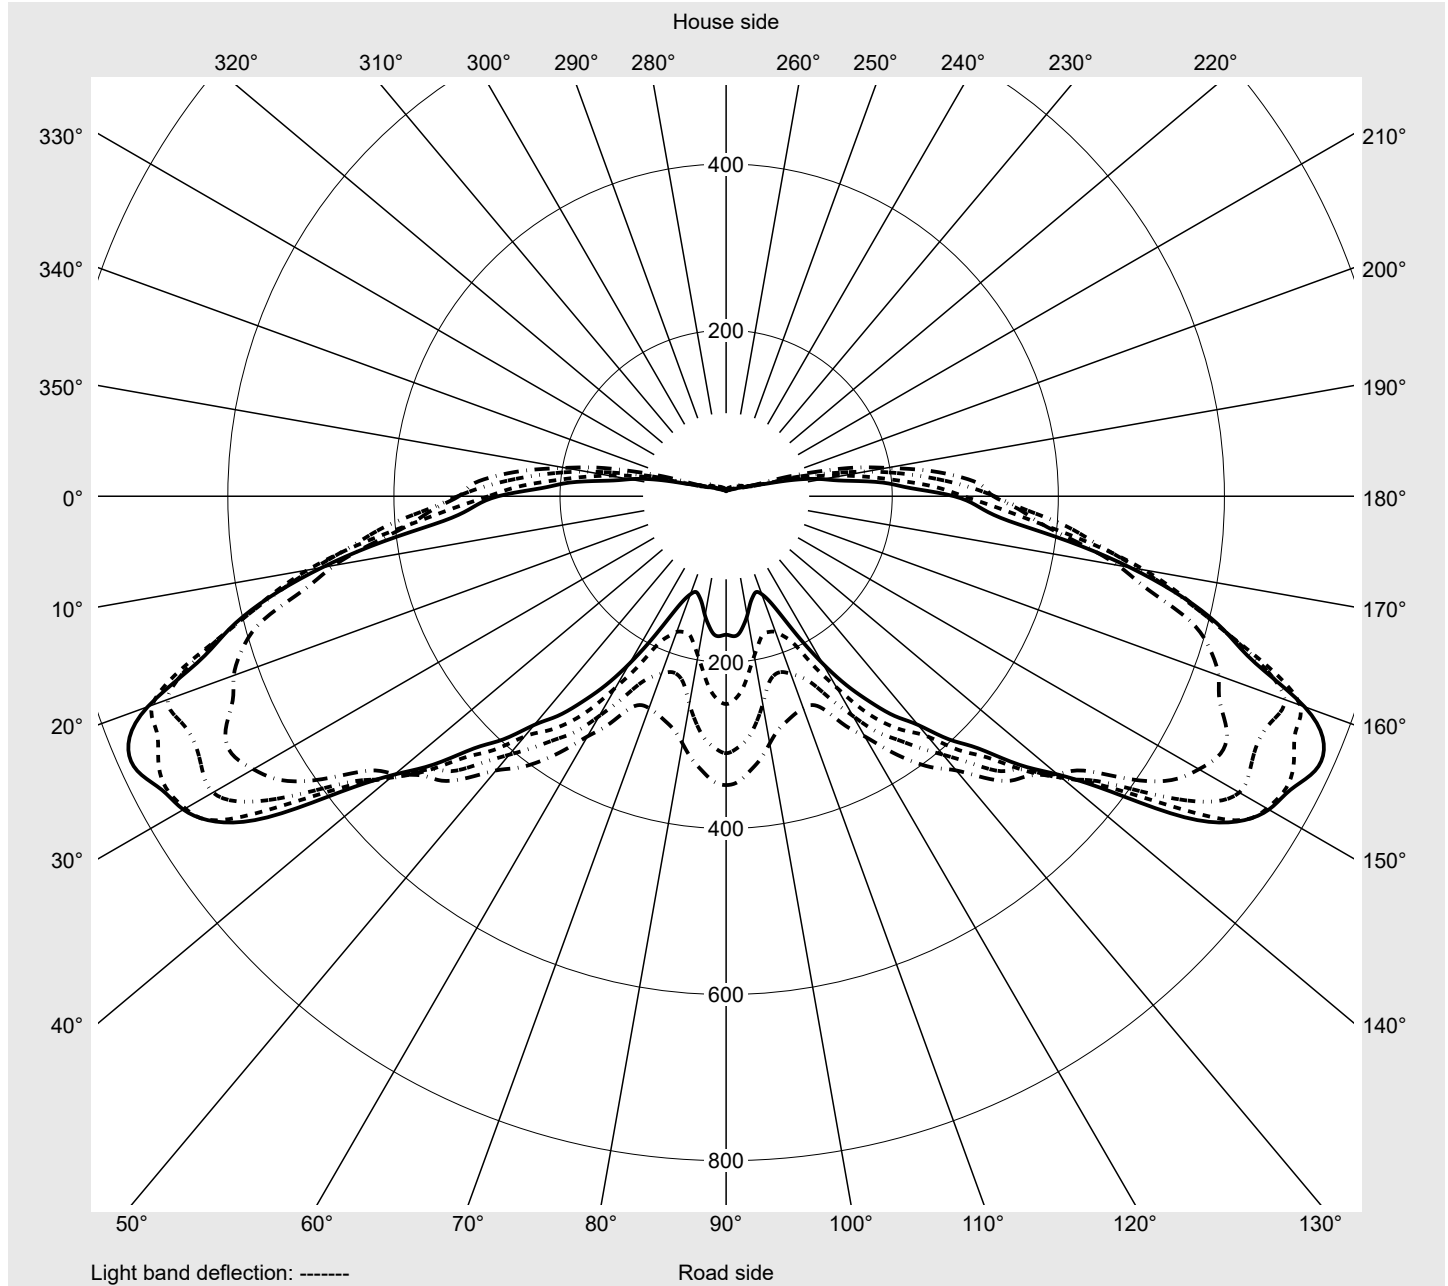

Photometric test report

Family LARGE BELL LED	Order number: 5XA1565E1V108 + 5NA15600XB1 EAN: 4069025073815 + 4050737087955	LP number 59565_29
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7
2,5°	180.4	180.8	181.0	181.1	181.4	181.6	182.2	182.4	182.8	183.2	183.6	183.8	184.2	184.5	184.7
5,0°	179.2	180.0	181.0	181.8	182.5	183.4	184.2	184.9	185.7	186.4	187.1	187.9	188.4	189.8	190.9
7,5°	177.5	178.7	180.5	182.1	183.4	184.6	186.3	187.6	188.9	190.8	192.4	193.7	195.2	196.8	198.0
10,0°	181.0	183.4	187.0	189.8	192.6	194.4	197.3	199.3	200.6	203.3	204.2	206.2	206.3	208.5	208.5
12,5°	171.5	176.5	180.1	184.2	187.5	191.0	194.8	198.4	201.9	204.4	207.8	212.2	214.7	217.6	219.3
15,0°	167.4	173.5	177.6	181.9	184.7	189.0	190.0	193.5	194.8	198.4	198.7	203.4	204.5	208.9	212.9
17,5°	159.4	167.7	171.8	176.0	179.4	183.1	188.5	190.4	192.3	195.5	196.0	198.2	196.4	196.7	196.4
20,0°	154.1	156.3	157.6	160.8	164.8	165.6	170.9	173.1	176.3	178.8	183.5	187.7	188.5	189.8	190.8
22,5°	162.8	168.2	174.7	177.0	178.1	179.5	179.2	180.8	182.3	181.7	179.0	178.4	181.1	184.3	188.1
25,0°	166.0	172.2	172.9	179.7	183.2	189.1	195.3	199.9	205.2	204.8	206.2	207.9	202.9	200.3	198.0
27,5°	180.2	187.0	194.1	199.1	204.0	202.5	203.4	203.5	204.8	207.2	212.7	221.9	227.8	229.8	234.0
30,0°	193.3	203.0	210.2	214.7	224.5	233.2	233.2	238.5	237.8	238.2	237.1	236.8	236.7	239.1	252.8
32,5°	214.6	224.6	233.5	237.0	237.9	240.8	242.8	243.3	249.6	252.7	263.6	271.7	271.5	268.6	267.6
35,0°	237.4	252.6	258.1	269.1	271.4	275.2	278.7	278.8	277.8	278.4	279.2	284.5	288.3	306.2	312.8
37,5°	259.1	267.6	274.1	282.7	280.4	278.3	281.0	283.7	294.6	305.6	316.3	323.4	322.5	323.8	331.0
40,0°	266.1	274.5	286.9	287.4	291.3	295.4	300.3	305.5	315.8	320.6	329.0	340.5	351.4	365.9	373.1
42,5°	282.1	284.1	284.2	287.2	297.4	303.2	312.2	319.5	333.1	348.4	357.0	364.9	374.7	371.2	390.9
45,0°	293.2	289.9	288.8	299.9	319.5	331.5	345.7	360.6	370.3	374.3	383.3	395.4	409.2	417.1	424.9
47,5°	301.0	302.8	310.5	323.5	341.5	359.7	378.7	389.1	402.5	427.6	427.4	434.7	449.6	453.3	436.6
50,0°	313.3	321.7	334.1	344.4	374.4	395.3	408.4	423.3	438.1	456.6	489.0	496.4	492.9	483.9	467.9
52,5°	313.1	328.2	341.7	358.0	401.1	451.1	467.5	478.1	504.8	519.4	542.9	556.8	542.2	518.5	504.4
55,0°	313.2	336.4	359.1	384.2	422.6	478.1	517.0	528.5	551.0	563.4	616.1	633.9	613.7	570.8	542.8
57,5°	321.7	352.2	381.1	427.3	478.9	520.8	577.5	610.6	630.9	643.1	664.9	671.2	657.4	636.0	593.9
60,0°	323.2	359.6	410.5	453.1	505.6	561.3	618.5	676.5	715.7	710.4	705.6	711.4	713.5	684.7	624.7
62,5°	286.2	328.5	379.8	446.4	511.7	565.8	618.0	685.3	735.2	742.0	754.4	760.4	752.0	726.3	647.4
65,0°	274.6	305.4	341.8	415.7	493.8	563.9	619.8	668.2	741.1	778.9	782.3	765.9	754.6	729.0	673.9
67,5°	284.1	314.8	333.2	382.9	455.3	507.0	571.0	629.7	676.4	705.0	732.1	741.7	727.5	700.5	661.8
70,0°	267.9	329.0	350.9	385.0	422.4	472.2	536.8	577.2	598.0	632.7	652.2	661.0	652.9	630.1	605.9
72,5°	218.0	308.7	352.2	377.6	381.0	418.2	475.4	514.1	535.2	556.4	561.6	581.5	569.1	543.1	512.5
75,0°	158.8	220.1	273.4	313.1	324.3	343.3	376.4	404.4	418.5	432.5	433.1	451.9	444.5	409.5	367.2
77,5°	79.4	113.9	156.1	188.5	206.3	221.4	230.0	236.9	255.6	273.7	264.7	257.8	245.7	234.1	219.0
80,0°	37.9	53.7	74.9	97.3	100.5	97.7	103.4	106.8	113.7	110.3	111.1	112.5	115.0	111.2	117.5
82,5°	22.3	25.2	35.2	45.3	50.5	47.1	47.5	42.3	39.7	38.3	44.4	56.8	62.9	67.3	68.6
85,0°	11.5	12.4	13.1	14.4	14.6	13.9	13.5	11.7	10.8	13.3	17.3	22.4	25.9	21.8	21.7
87,5°	4.7	5.5	5.7	6.3	6.5	6.9	7.2	7.7	8.4	7.7	7.3	7.4	8.6	9.4	8.7
90,0°	2.2	2.5	3.0	3.2	3.3	3.4	3.6	3.7	3.7	3.7	3.9	3.8	4.0	3.9	3.9
92,5°	1.7	2.0	2.4	2.6	2.7	2.9	2.9	3.0	3.1	3.1	3.2	3.2	3.2	3.2	3.2
95,0°	1.6	1.7	2.0	2.3	2.4	2.5	2.7	2.7	2.7	2.7	2.8	2.8	2.8	2.8	2.8
97,5°	1.5	1.5	1.6	1.8	1.8	1.9	2.0	2.0	2.0	2.1	2.0	2.0	1.9	1.9	1.9
100,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.2
102,5°	1.3	1.3	1.2	1.2	1.2	1.2	1.3	1.4	1.4	1.4	1.4	1.2	1.2	1.1	1.0
105,0°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.3	1.3	1.2	1.2	1.2	1.0	1.0	0.8
107,5°	1.1	1.1	1.1	1.1	1.1	1.0	1.0	1.1	1.2	1.2	1.2	1.0	1.0	0.8	0.8
110,0°	1.1	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.1	1.1	1.0	0.9	0.8	0.8	0.7
112,5°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.9	0.8	0.8	0.7	0.6

Photometric test report

Family LARGE BELL LED	Order number: 5XA1565E1V108 + 5NA15600XB1 EAN: 4069025073815 + 4050737087955	LP number 59565_29
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7
2,5°	184.9	185.3	185.7	186.0	186.4	186.3	186.5	186.8	186.9	186.7	187.0	187.0	187.0	187.2	187.4
5,0°	191.7	192.7	193.7	194.3	194.8	195.6	195.8	196.5	196.8	197.6	198.0	198.0	199.0	200.2	200.6
7,5°	200.5	201.7	203.1	205.1	207.1	208.3	210.2	211.6	212.2	213.9	215.8	217.4	218.3	219.9	220.4
10,0°	210.3	212.2	214.0	215.9	218.8	222.0	225.9	227.4	230.1	233.2	236.0	238.5	241.8	244.4	246.4
12,5°	220.4	223.3	224.7	226.4	229.0	231.3	234.0	238.3	240.6	244.6	248.2	253.6	256.6	261.5	265.7
15,0°	216.7	216.8	220.4	224.2	226.4	229.7	230.3	233.0	237.7	241.1	248.2	255.1	262.1	269.9	276.7
17,5°	195.7	196.7	201.0	205.2	210.6	213.3	217.7	224.0	228.0	232.7	240.5	249.6	258.6	268.8	278.5
20,0°	192.5	189.4	189.2	191.1	194.2	200.8	206.6	214.2	220.6	229.0	235.0	243.4	253.2	265.0	275.9
22,5°	192.4	195.0	195.5	198.6	197.4	201.0	206.1	216.3	226.6	233.6	239.8	248.1	255.6	263.6	272.6
25,0°	197.3	197.9	201.0	208.3	211.6	215.7	218.8	225.0	232.5	243.5	252.7	258.8	263.2	267.6	272.2
27,5°	229.9	223.8	216.9	221.7	226.6	237.7	242.3	247.7	251.6	256.8	266.8	274.2	277.5	277.6	279.1
30,0°	258.1	261.3	256.2	254.0	251.3	255.9	265.3	275.6	276.8	276.4	281.1	286.2	290.5	288.0	286.1
32,5°	274.6	281.2	293.5	294.2	294.6	290.7	290.3	293.2	301.0	302.1	300.7	299.6	302.2	299.5	294.6
35,0°	312.2	312.3	314.1	319.4	329.3	330.8	326.9	318.6	318.6	325.7	325.2	321.7	314.6	309.3	303.8
37,5°	345.5	355.3	354.9	349.3	350.3	355.9	357.8	350.2	345.3	348.9	348.2	344.6	332.5	321.5	317.1
40,0°	369.4	373.9	380.2	387.8	384.4	380.7	381.5	381.4	378.0	370.8	367.2	364.0	349.8	335.6	328.4
42,5°	403.4	410.6	411.1	410.8	417.0	416.1	403.1	399.3	396.9	391.0	379.6	370.0	357.1	343.3	339.4
45,0°	421.1	436.1	445.4	446.3	438.0	437.3	433.3	420.3	408.8	401.6	392.4	373.7	358.3	347.9	346.4
47,5°	443.7	448.9	463.5	462.1	461.1	458.2	444.4	440.1	423.3	412.6	398.6	378.9	359.8	350.1	349.1
50,0°	455.6	463.9	481.7	476.7	467.8	462.5	450.6	434.6	418.9	402.6	389.4	375.1	355.0	349.1	346.5
52,5°	493.6	488.0	487.5	486.7	470.2	461.2	444.9	422.3	403.4	384.4	367.8	352.9	341.2	337.5	338.6
55,0°	522.6	508.1	500.6	490.4	469.0	443.2	431.1	406.6	378.3	355.0	333.0	318.0	311.9	314.4	315.7
57,5°	542.6	520.4	497.5	484.4	459.6	431.0	412.2	389.2	362.2	334.0	311.7	285.2	272.1	271.5	275.0
60,0°	563.4	528.8	487.0	468.2	435.7	406.2	381.4	357.3	335.7	305.6	277.4	250.7	235.7	227.5	221.9
62,5°	572.6	527.2	489.4	444.8	414.5	377.7	356.3	333.8	303.8	265.9	232.4	198.4	182.8	173.9	171.4
65,0°	584.4	521.3	478.4	429.4	397.0	359.4	333.6	302.3	269.7	232.6	194.7	160.2	137.2	125.6	120.9
67,5°	569.8	520.2	465.0	410.2	374.8	333.0	300.4	272.9	233.8	197.3	158.5	128.0	102.5	87.4	80.2
70,0°	538.8	480.5	435.4	392.7	348.2	301.5	267.8	230.0	201.2	165.7	133.5	102.4	79.7	62.7	53.2
72,5°	455.2	402.3	367.6	327.3	283.0	241.8	205.6	180.9	160.4	131.0	99.4	72.9	56.0	43.4	35.2
75,0°	331.8	285.6	261.0	236.2	220.3	189.5	162.3	150.1	141.5	116.7	79.5	52.7	39.4	31.0	24.0
77,5°	199.7	178.8	166.4	167.0	162.6	149.5	134.2	126.1	118.5	95.1	60.2	36.0	25.4	19.5	16.4
80,0°	108.1	95.2	87.9	77.7	69.1	66.4	60.2	53.6	51.5	44.3	26.9	16.3	11.2	10.2	9.7
82,5°	63.3	55.0	43.0	30.3	24.7	19.2	15.6	11.7	9.5	8.9	10.2	7.1	6.3	6.4	6.7
85,0°	19.2	16.5	13.7	11.3	8.9	8.6	8.5	7.5	6.5	5.8	5.4	4.9	4.6	4.6	4.6
87,5°	8.2	6.6	6.8	6.5	5.8	5.9	5.7	5.5	4.9	4.3	4.1	3.9	3.7	3.6	3.7
90,0°	3.9	3.8	3.8	3.9	3.9	4.0	3.9	3.7	3.5	3.3	3.1	3.0	2.9	2.9	2.9
92,5°	3.2	3.2	3.2	3.2	3.2	3.2	3.1	3.0	2.9	2.8	2.6	2.6	2.5	2.5	2.4
95,0°	2.7	2.6	2.6	2.7	2.7	2.6	2.5	2.5	2.4	2.4	2.4	2.3	2.3	2.3	2.3
97,5°	1.9	1.8	1.7	1.7	1.7	1.8	1.7	1.7	1.7	1.6	1.6	1.7	1.6	1.6	1.6
100,0°	1.1	1.0	1.0	1.0	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.9
102,5°	1.0	0.8	0.8	0.8	0.8	0.8	0.8	0.7	0.6	0.6	0.6	0.6	0.6	0.6	0.6
105,0°	0.8	0.8	0.8	0.7	0.7	0.6	0.6	0.6	0.5	0.4	0.4	0.4	0.4	0.4	0.4
107,5°	0.7	0.7	0.6	0.6	0.6	0.6	0.5	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4
110,0°	0.6	0.6	0.5	0.5	0.5	0.4	0.4	0.4	0.4	0.4	0.3	0.3	0.2	0.3	0.2
112,5°	0.6	0.5	0.5	0.4	0.4	0.4	0.4	0.4	0.4	0.2	0.3	0.3	0.3	0.2	0.2

Photometric test report

Family LARGE BELL LED	Order number: 5XA1565E1V108 + 5NA15600XB1 EAN: 4069025073815 + 4050737087955	LP number 59565_29
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7
2,5°	187.9	188.2	188.4	188.8	188.7	188.9	189.1	179.9	179.7	179.8	179.8	179.8	179.7	179.6	179.9
5,0°	200.8	201.6	202.2	202.4	202.5	202.4	203.0	177.6	177.4	176.7	176.3	176.1	175.9	176.1	176.2
7,5°	222.0	223.9	225.6	225.9	226.0	225.9	225.8	176.0	174.8	173.1	171.6	170.5	170.3	169.6	168.7
10,0°	248.1	249.9	250.8	251.5	252.1	252.6	252.7	178.5	177.5	173.6	172.1	169.1	166.9	165.2	164.3
12,5°	269.2	273.1	274.6	277.9	279.4	279.8	279.4	169.8	165.9	162.2	159.5	156.8	151.9	150.7	148.5
15,0°	283.0	287.8	292.8	296.6	298.9	301.7	300.4	164.9	162.1	157.3	153.8	147.6	141.0	137.9	132.3
17,5°	287.9	296.6	303.4	308.5	312.8	315.4	316.4	156.2	152.3	147.5	142.6	139.3	134.5	130.0	124.9
20,0°	285.0	292.6	298.7	305.8	310.3	313.7	314.1	150.1	143.8	139.2	133.4	128.8	124.7	120.0	117.3
22,5°	280.5	287.4	292.4	296.4	300.6	303.5	302.3	160.9	156.4	153.3	144.3	141.0	131.6	123.2	117.3
25,0°	277.5	283.1	286.6	288.2	292.1	291.9	292.9	163.6	154.3	150.0	143.1	137.2	130.9	123.7	115.2
27,5°	281.4	284.5	285.7	287.9	289.2	290.7	291.4	174.0	170.2	159.0	151.1	144.7	135.2	126.0	116.0
30,0°	286.0	287.7	288.1	289.1	291.7	292.0	291.8	186.8	178.9	172.3	163.1	152.5	141.3	131.8	126.0
32,5°	291.1	290.4	291.4	292.1	293.9	292.9	292.1	204.9	195.4	188.7	176.6	165.0	148.1	134.8	126.2
35,0°	299.5	299.3	298.6	298.8	299.9	298.5	298.5	219.9	212.1	202.9	189.8	176.2	157.8	145.2	130.3
37,5°	313.4	312.9	313.1	312.9	313.1	313.4	311.3	245.3	231.2	216.1	201.0	181.2	163.1	149.3	135.7
40,0°	329.1	329.8	328.4	328.1	330.0	331.6	334.2	254.3	240.0	228.3	211.4	182.8	166.8	149.2	130.9
42,5°	339.2	341.2	343.1	344.2	346.4	348.8	350.2	268.4	248.4	239.4	218.4	191.8	169.9	148.7	128.1
45,0°	348.4	353.1	356.1	357.4	360.2	357.6	357.7	278.5	259.0	240.7	221.6	200.2	174.7	145.5	116.3
47,5°	354.0	359.4	365.1	369.2	370.6	368.5	368.3	290.2	264.6	242.8	217.0	190.9	171.5	140.2	110.0
50,0°	350.6	355.3	366.4	375.0	378.0	379.0	376.9	295.3	266.9	243.2	214.5	184.1	162.2	128.9	98.4
52,5°	338.6	343.1	354.9	367.8	376.6	380.2	379.7	298.0	267.7	243.4	214.7	184.3	153.1	116.7	88.6
55,0°	316.9	321.6	334.2	347.0	359.4	368.1	374.1	290.8	271.6	240.5	208.5	178.1	138.8	104.9	71.0
57,5°	280.9	288.6	302.3	318.8	331.8	343.8	347.8	307.6	278.7	240.4	196.6	159.3	115.3	79.2	48.0
60,0°	223.1	233.0	254.2	275.6	293.5	303.6	309.4	288.0	249.6	211.2	170.6	127.5	92.4	57.4	37.4
62,5°	172.0	181.4	195.1	212.4	231.9	244.7	250.2	252.8	211.9	176.1	143.2	112.5	80.3	52.4	41.4
65,0°	124.9	133.1	146.1	157.6	167.0	168.5	166.7	222.7	189.0	143.5	118.2	95.3	69.7	49.6	41.1
67,5°	80.7	84.8	92.0	95.5	97.7	99.4	96.3	217.9	141.2	93.9	75.6	59.0	44.9	36.8	29.3
70,0°	49.1	45.2	45.9	46.2	47.7	50.9	52.1	163.2	102.6	81.4	68.3	56.0	44.3	32.3	25.2
72,5°	28.8	24.2	21.1	19.6	20.0	21.7	22.0	139.4	97.4	84.5	69.7	54.0	41.8	30.5	21.0
75,0°	19.5	15.6	13.6	12.9	12.7	12.6	12.4	98.0	77.2	65.6	56.2	47.4	35.9	22.9	17.5
77,5°	13.1	11.5	10.3	9.9	9.8	9.7	9.6	63.5	50.1	41.9	35.3	34.1	25.9	19.3	15.1
80,0°	9.2	8.8	8.3	8.0	7.9	7.8	7.7	35.9	35.2	30.9	27.4	24.3	18.3	15.8	12.5
82,5°	6.8	6.8	6.5	6.3	6.4	6.4	6.4	23.8	23.6	22.0	19.8	15.7	13.1	11.1	9.3
85,0°	4.7	4.7	4.8	4.9	4.9	5.0	4.9	10.4	11.2	11.7	11.1	9.4	9.2	8.6	8.2
87,5°	3.7	3.6	3.7	3.7	3.7	3.8	3.8	5.5	5.7	6.3	6.6	5.7	6.0	6.2	6.1
90,0°	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.1	2.2	2.2	2.2	2.2	2.1	2.1	2.0
92,5°	2.4	2.4	2.5	2.5	2.4	2.4	2.4	1.7	1.7	1.7	1.7	1.6	1.5	1.6	1.5
95,0°	2.2	2.2	2.2	2.2	2.2	2.3	2.3	1.5	1.5	1.5	1.5	1.5	1.5	1.4	1.4
97,5°	1.6	1.7	1.8	1.8	1.8	1.7	1.7	1.5	1.5	1.5	1.5	1.5	1.4	1.4	1.4
100,0°	0.9	0.9	0.9	1.0	1.1	1.1	1.1	1.4	1.4	1.3	1.3	1.3	1.3	1.3	1.3
102,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.6	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
105,0°	0.4	0.4	0.4	0.4	0.4	0.4	0.4	1.2	1.2	1.3	1.3	1.3	1.3	1.3	1.3
107,5°	0.3	0.3	0.2	0.2	0.2	0.2	0.2	1.1	1.2	1.2	1.2	1.1	1.2	1.2	1.1
110,0°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
112,5°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1

Photometric test report

Family LARGE BELL LED	Order number: 5XA1565E1V108 + 5NA15600XB1 EAN: 4069025073815 + 4050737087955	LP number 59565_29
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7
2,5°	180.2	180.4	180.8	181.0	181.1	181.3	181.5	181.8	181.8	182.0	182.3	182.4	182.4	182.4	182.4
5,0°	176.2	176.6	176.8	177.1	177.4	177.5	177.9	178.2	178.3	179.0	179.2	179.6	180.3	180.7	181.2
7,5°	168.3	167.7	167.2	168.1	166.9	167.5	167.5	167.2	167.3	167.8	168.1	168.9	169.2	169.9	170.6
10,0°	162.3	161.9	162.0	162.0	160.8	160.4	158.7	158.2	156.6	158.3	155.9	155.9	155.0	154.6	154.6
12,5°	146.2	145.2	143.7	142.2	143.2	143.2	142.6	142.8	142.8	143.3	141.1	139.5	138.7	136.6	134.5
15,0°	128.1	125.7	123.2	120.1	119.8	118.6	118.5	118.4	119.5	119.3	119.7	117.2	115.2	112.8	109.6
17,5°	118.0	111.9	106.1	104.1	101.9	100.4	99.6	98.1	97.2	98.5	96.3	94.2	91.6	87.2	84.2
20,0°	107.7	101.7	98.2	92.5	91.0	88.6	86.9	84.1	83.7	82.7	80.6	77.1	71.8	68.6	65.9
22,5°	109.7	102.3	91.4	85.5	79.9	79.0	77.6	76.5	74.4	71.4	67.4	63.0	58.0	54.7	53.0
25,0°	108.2	101.6	91.6	81.0	75.0	74.6	72.1	68.3	65.0	61.4	55.5	51.0	48.1	46.4	45.6
27,5°	106.4	95.5	89.8	79.7	74.2	68.9	65.8	62.6	56.4	50.3	45.6	42.6	41.8	41.1	40.2
30,0°	111.9	99.4	87.9	79.0	71.9	65.8	61.9	55.6	48.9	43.0	39.9	39.1	38.5	37.9	36.8
32,5°	114.8	99.0	86.9	76.9	70.3	64.1	54.9	48.5	41.3	38.5	38.0	37.1	36.2	35.3	34.0
35,0°	111.8	97.5	83.6	75.6	67.9	56.1	45.8	39.6	38.0	37.0	36.4	35.3	34.8	33.7	32.6
37,5°	112.6	93.6	82.6	71.1	58.4	46.7	40.8	38.6	36.9	35.7	34.6	33.9	33.2	32.2	31.4
40,0°	108.7	90.5	78.0	62.1	48.6	42.2	40.3	38.4	36.3	34.2	32.7	31.7	30.9	30.0	29.1
42,5°	105.8	88.0	68.3	52.2	44.1	41.9	40.6	38.6	35.8	33.2	31.0	29.5	28.4	27.4	26.6
45,0°	100.6	77.8	59.2	46.9	44.3	42.9	40.6	37.9	34.7	31.2	28.5	26.3	24.8	23.8	23.0
47,5°	86.8	64.5	49.2	44.7	43.0	41.2	38.4	35.9	33.0	29.2	26.1	23.8	22.3	20.9	20.2
50,0°	70.4	48.6	40.8	39.8	38.2	36.2	33.9	31.7	29.2	26.5	24.0	21.6	19.8	18.7	17.9
52,5°	57.8	38.4	35.1	34.6	33.0	31.3	29.8	27.9	25.8	23.6	21.4	19.5	18.0	17.1	16.3
55,0°	45.3	33.4	30.5	30.0	29.0	27.5	26.1	24.3	22.4	21.0	19.0	17.4	16.3	15.4	14.8
57,5°	33.8	28.9	27.1	26.7	26.1	24.8	23.3	21.1	19.4	18.0	16.5	15.5	14.7	13.9	13.5
60,0°	30.7	27.8	24.5	23.4	23.2	22.1	20.5	18.4	16.7	15.2	14.1	13.3	12.9	12.4	12.4
62,5°	35.4	27.8	22.9	21.3	20.3	19.1	17.7	16.0	14.5	13.3	12.5	11.7	11.4	11.1	10.7
65,0°	34.1	26.5	23.4	21.3	19.0	17.4	15.3	13.8	13.0	12.0	11.4	10.7	10.2	9.5	8.9
67,5°	24.2	21.0	19.8	17.7	15.8	14.2	13.0	12.3	11.7	10.8	10.0	9.1	8.2	7.6	7.2
70,0°	19.6	17.4	16.1	14.9	13.5	11.8	11.0	10.1	9.2	8.5	7.9	7.2	6.8	6.4	6.0
72,5°	16.9	13.3	12.2	11.5	10.5	9.5	8.4	7.6	6.9	6.3	5.8	5.5	5.2	4.8	4.4
75,0°	14.1	13.1	12.0	10.7	9.7	7.4	6.4	5.7	5.2	4.9	4.5	4.1	3.7	3.3	3.0
77,5°	12.6	11.8	11.0	10.0	7.4	5.6	5.1	4.6	4.2	3.9	3.6	3.2	3.0	2.6	2.4
80,0°	11.4	10.7	10.3	9.1	6.4	4.6	3.9	3.7	3.5	3.2	2.9	2.7	2.4	2.3	2.1
82,5°	8.9	8.7	8.3	6.9	4.5	3.6	3.2	3.0	2.8	2.6	2.4	2.3	2.1	1.9	1.8
85,0°	7.9	7.4	6.8	4.3	3.0	2.6	2.4	2.4	2.2	2.1	2.0	1.9	1.7	1.6	1.5
87,5°	5.5	5.1	3.8	2.5	2.1	1.9	1.9	1.9	1.7	1.7	1.5	1.5	1.5	1.4	1.3
90,0°	2.0	1.9	1.7	1.6	1.5	1.5	1.5	1.5	1.4	1.4	1.4	1.3	1.2	1.2	1.2
92,5°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.2	1.2	1.2	1.2	1.2
95,0°	1.4	1.4	1.4	1.4	1.4	1.4	1.2	1.3	1.2	1.2	1.2	1.2	1.2	1.2	1.1
97,5°	1.3	1.3	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.1
100,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.1
102,5°	1.3	1.3	1.3	1.3	1.3	1.2	1.3	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.1
105,0°	1.3	1.2	1.2	1.3	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.1
107,5°	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.1
110,0°	1.1	1.1	1.1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.1
112,5°	1.1	1.1	1.1	1.1	1.2	1.1	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.2	1.1

Photometric test report

Family LARGE BELL LED	Order number: 5XA1565E1V108 + 5NA15600XB1 EAN: 4069025073815 + 4050737087955	LP number 59565_29
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	182.7	0.3	0.3
2,5°	182.5	182.3	182.0	181.7	181.7	181.9	182.2	182.0	181.8	181.6	181.9	182.2	182.2	2.2	2.5
5,0°	181.4	181.7	181.9	181.7	181.8	182.3	182.4	182.8	182.9	183.5	184.1	184.1	184.0	4.4	6.9
7,5°	171.4	172.1	172.7	173.5	174.2	175.3	176.1	176.8	177.3	177.4	177.6	177.6	177.6	6.7	13.6
10,0°	155.1	155.7	156.6	157.2	157.5	157.4	157.7	158.1	158.4	159.0	159.5	159.6	160.0	9.1	22.7
12,5°	133.4	132.8	132.6	132.8	133.3	133.4	133.4	133.2	133.0	133.5	133.2	133.5	133.7	11.1	33.8
15,0°	106.7	105.6	105.7	105.6	105.4	106.0	106.4	106.0	106.1	106.1	105.9	105.7	105.6	12.5	46.3
17,5°	82.1	81.5	80.7	80.4	80.0	80.3	80.1	80.0	79.9	79.2	78.9	77.8	77.5	13.5	59.8
20,0°	64.6	64.0	63.5	63.3	62.7	62.5	61.9	61.4	60.6	60.3	59.4	59.0	59.4	14.3	74.1
22,5°	52.4	52.3	51.5	50.9	50.4	50.1	49.1	48.3	47.8	47.2	46.7	46.4	46.4	15.8	89.8
25,0°	45.0	44.4	44.0	43.2	42.5	41.6	40.8	40.3	39.9	39.5	39.3	39.1	39.1	17.5	107.4
27,5°	39.3	38.6	37.8	37.1	36.2	35.3	34.5	33.9	33.7	33.5	33.2	33.3	33.3	19.8	127.2
30,0°	35.5	34.2	33.2	32.3	31.6	30.9	30.1	29.8	29.5	29.2	29.3	29.3	29.1	22.7	149.9
32,5°	32.9	31.9	30.5	29.9	29.2	28.7	28.1	27.5	27.3	26.9	26.8	26.6	26.7	25.8	175.7
35,0°	31.8	30.9	29.7	28.7	28.1	27.4	27.1	26.4	25.7	25.0	24.7	24.5	24.4	29.4	205.1
37,5°	30.6	29.6	28.7	27.8	27.3	26.6	26.1	25.4	24.6	23.6	23.0	22.6	22.6	33.1	238.2
40,0°	28.5	27.8	27.3	26.7	26.2	25.7	24.9	24.4	23.6	22.9	22.6	22.4	22.4	36.7	274.9
42,5°	26.2	26.3	25.9	25.5	24.8	24.1	23.8	23.4	22.5	22.0	21.4	21.2	21.1	40.1	315.0
45,0°	23.0	23.5	23.6	23.3	23.4	23.2	22.3	21.4	20.8	20.3	20.0	19.6	19.4	43.8	358.9
47,5°	19.8	19.8	19.8	19.9	20.3	20.3	19.9	19.3	18.7	18.3	18.2	17.8	18.0	47.3	406.2
50,0°	17.2	16.7	16.5	16.4	16.6	16.7	16.4	15.9	15.7	15.8	15.4	15.2	15.2	50.3	456.5
52,5°	15.7	15.2	14.9	14.6	14.3	13.8	13.4	13.0	12.7	12.4	12.4	12.4	12.2	53.2	509.7
55,0°	14.2	13.8	13.4	13.1	12.5	11.9	11.7	11.3	10.8	10.3	10.3	10.2	10.2	55.5	565.2
57,5°	13.0	12.6	12.0	11.5	11.1	10.8	10.4	10.1	9.5	9.1	8.9	8.5	8.5	57.6	622.8
60,0°	12.0	11.4	10.7	10.2	10.2	10.0	9.5	9.0	8.6	8.1	7.8	7.6	7.5	58.1	681.0
62,5°	10.2	9.8	9.5	9.3	9.1	8.9	8.6	8.1	7.7	7.2	6.9	6.8	6.6	56.7	737.7
65,0°	8.6	8.3	8.0	8.0	7.8	7.6	7.3	7.1	6.7	6.3	6.1	6.0	6.0	54.5	792.2
67,5°	7.0	6.6	6.2	6.1	5.6	5.4	5.2	4.9	4.8	4.7	4.7	4.7	4.7	50.0	842.2
70,0°	5.7	5.4	5.2	4.7	4.2	4.0	3.8	3.6	3.4	3.3	3.2	3.2	3.2	45.3	887.5
72,5°	4.0	3.8	3.5	3.2	3.0	2.6	2.4	2.3	2.3	2.1	2.1	2.1	2.1	39.3	926.8
75,0°	2.7	2.4	2.3	2.1	1.9	1.7	1.6	1.5	1.5	1.4	1.3	1.4	1.3	30.7	957.5
77,5°	2.2	2.0	1.8	1.6	1.3	1.3	1.1	1.1	1.0	0.9	0.9	0.9	0.9	19.7	977.2
80,0°	1.9	1.7	1.5	1.4	1.2	1.1	1.0	0.9	0.9	0.9	0.8	0.8	0.9	9.7	986.9
82,5°	1.6	1.5	1.4	1.2	1.2	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.8	4.8	991.7
85,0°	1.4	1.2	1.2	1.0	1.0	1.0	0.9	0.8	0.8	0.8	0.8	0.8	0.8	2.1	993.8
87,5°	1.2	1.2	1.0	1.0	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	1.2	994.9
90,0°	1.0	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.7	995.6
92,5°	1.0	1.0	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.6	996.1
95,0°	1.0	1.0	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.5	996.6
97,5°	1.0	1.0	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.4	997.0
100,0°	1.1	1.0	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.3	997.3
102,5°	1.0	1.0	1.0	1.0	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.8	0.3	997.6
105,0°	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.3	997.9
107,5°	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.2	998.1
110,0°	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.8	0.8	0.8	0.9	0.2	998.3
112,5°	1.1	1.0	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.2	998.5

Photometric test report

Family LARGE BELL LED	Order number: 5XA1565E1V108 + 5NA15600XB1 EAN: 4069025073815 + 4050737087955	LP number 59565_29
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
115,0°	1.1	1.0	1.0	1.0	1.0	1.0	0.9	1.0	0.9	0.8	0.8	0.8	0.7	0.7	0.6
117,5°	1.0	1.0	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.6
120,0°	1.0	1.0	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.6	0.6
122,5°	0.9	0.9	0.9	0.8	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.6	0.5	0.5
125,0°	0.9	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.5	0.5	0.4	0.4
127,5°	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.5	0.5	0.5	0.4	0.4
130,0°	0.8	0.8	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.6	0.5	0.5	0.4	0.4	0.4
132,5°	0.8	0.8	0.8	0.8	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.5	0.5	0.5	0.4
135,0°	0.8	0.8	0.8	0.8	0.8	0.7	0.7	0.6	0.6	0.6	0.6	0.6	0.5	0.5	0.4

Photometric test report

Family
LARGE BELL LED

Order number: 5XA1565E1V108 + 5NA15600XB1
EAN: 4069025073815 + 4050737087955

LP number
59565_29

siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
115,0°	0.6	0.5	0.4	0.4	0.4	0.4	0.4	0.3	0.2	0.3	0.2	0.2	0.2	0.2	0.2
117,5°	0.5	0.5	0.4	0.4	0.4	0.4	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2
120,0°	0.5	0.4	0.4	0.4	0.4	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
122,5°	0.4	0.4	0.3	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
125,0°	0.4	0.4	0.3	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
127,5°	0.3	0.3	0.3	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
130,0°	0.4	0.4	0.3	0.2	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
132,5°	0.4	0.4	0.4	0.3	0.3	0.2	0.2	0.3	0.2	0.2	0.2	0.2	0.2	0.2	0.2
135,0°	0.4	0.4	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.2	0.2	0.2

Photometric test report

Family
LARGE BELL LED

Order number: 5XA1565E1V108 + 5NA15600XB1
EAN: 4069025073815 + 4050737087955

LP number
59565_29

siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
115,0°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
117,5°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	1.1	1.1	1.1	1.1	1.2	1.2	1.1	1.2
120,0°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.1
122,5°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	1.0	1.0	1.1	1.1	1.1	1.1	1.1	1.1
125,0°	0.2	0.2	0.2	0.2	0.2	0.2	0.0	0.9	0.9	0.9	1.0	1.0	1.1	1.1	1.1
127,5°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.8	0.9	0.9	0.9	0.9	1.0	1.0	1.0
130,0°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.8	0.9	0.9	0.9	0.9	0.9	0.9	0.9
132,5°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.8	0.8	0.9	0.9	0.9	0.9	0.9	0.9
135,0°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.8	0.8	0.8	0.9	0.9	0.9	0.9	0.9

Photometric test report

Family LARGE BELL LED	Order number: 5XA1565E1V108 + 5NA15600XB1 EAN: 4069025073815 + 4050737087955	LP number 59565_29 siteco
--------------------------	---	-------------------------------------

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
115,0°	1.2	1.2	1.2	1.2	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2
117,5°	1.3	1.2	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.2	1.2	1.2	1.2
120,0°	1.1	1.3	1.1	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.3	1.2	1.2	1.2	1.2
122,5°	1.1	1.1	1.1	1.1	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
125,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.2	1.1	1.1	1.1	1.2	1.2	1.2	1.2	1.2
127,5°	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
130,0°	1.0	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
132,5°	1.0	1.0	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
135,0°	0.9	0.9	0.9	1.0	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
115,0°	1.2	1.1	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.9	0.9	0.2	998.7
117,5°	1.2	1.2	1.2	1.1	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.2	998.9
120,0°	1.2	1.2	1.2	1.1	1.1	1.0	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.2	999.1
122,5°	1.2	1.2	1.1	1.1	1.1	1.0	1.0	1.0	0.9	0.9	0.9	0.9	0.9	0.2	999.3
125,0°	1.1	1.1	1.1	1.1	1.1	1.0	1.0	0.9	0.9	0.9	0.9	0.9	0.9	0.2	999.5
127,5°	1.1	1.1	1.1	1.1	1.1	1.0	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.2	999.6
130,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.0	1.0	0.9	0.9	0.9	0.9	0.9	0.1	999.8
132,5°	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.0	1.0	0.9	0.9	0.1	999.9
135,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	0.9	0.1	1000.1

Photometric test report

Family LARGE BELL LED	Order number: 5XA1565E1V108 + 5NA15600XB1 EAN: 4069025073815 + 4050737087955	LP number 59565_29
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	5180	34.3	37.7	36.0
95	241	252	4915	32.1	35.2	33.7
90	229	250	4670	30.2	33.0	31.6
85	216	248	4405	28.1	30.8	29.4
80	203	246	4140	26.1	28.6	27.4
75	190	243	3875	24.2	26.5	25.4
70	178	241	3630	22.5	24.6	23.6
65	165	238	3365	20.6	22.6	21.6
60	152	235	3100	18.9	20.6	19.8
55	140	232	2855	17.2	18.8	18.0
50	127	229	2590	15.5	17.0	16.2
45	114	225	2325	13.9	15.1	14.5
40	102	221	2080	12.4	13.6	13.0
35	89	216	1815	10.8	11.8	11.3
30	76	210	1550	9.2	10.1	9.6
25	63	203	1285	7.7	8.4	8.0
20	51	195	1040	6.4	6.9	6.6
15	38	184	775	4.9	5.3	5.1
11	29	175	591	3.8	4.1	4.0