

Photometric test report

Family

Streetlight 11 midi LED



Order number: 5XC3J51G08ME

EAN: 4058352991893

LP number

59599_192

Version

post-top or side-entry mounting

Optic

asymmetric, extremely wide distribution with an additional rear light component (ST1.0ST0.5)

Cover

transparent, PMMA

Lamps

LED 3000 K | CRI ≥ 70

Controlgear

ECG SITECO iQ - DALI2


Rated values

Net luminous flux = 17640 lm
Power consumption = 122.6 W
Luminous efficacy = 143.9 lm/W

serial documentation

07.01.2025


siteco

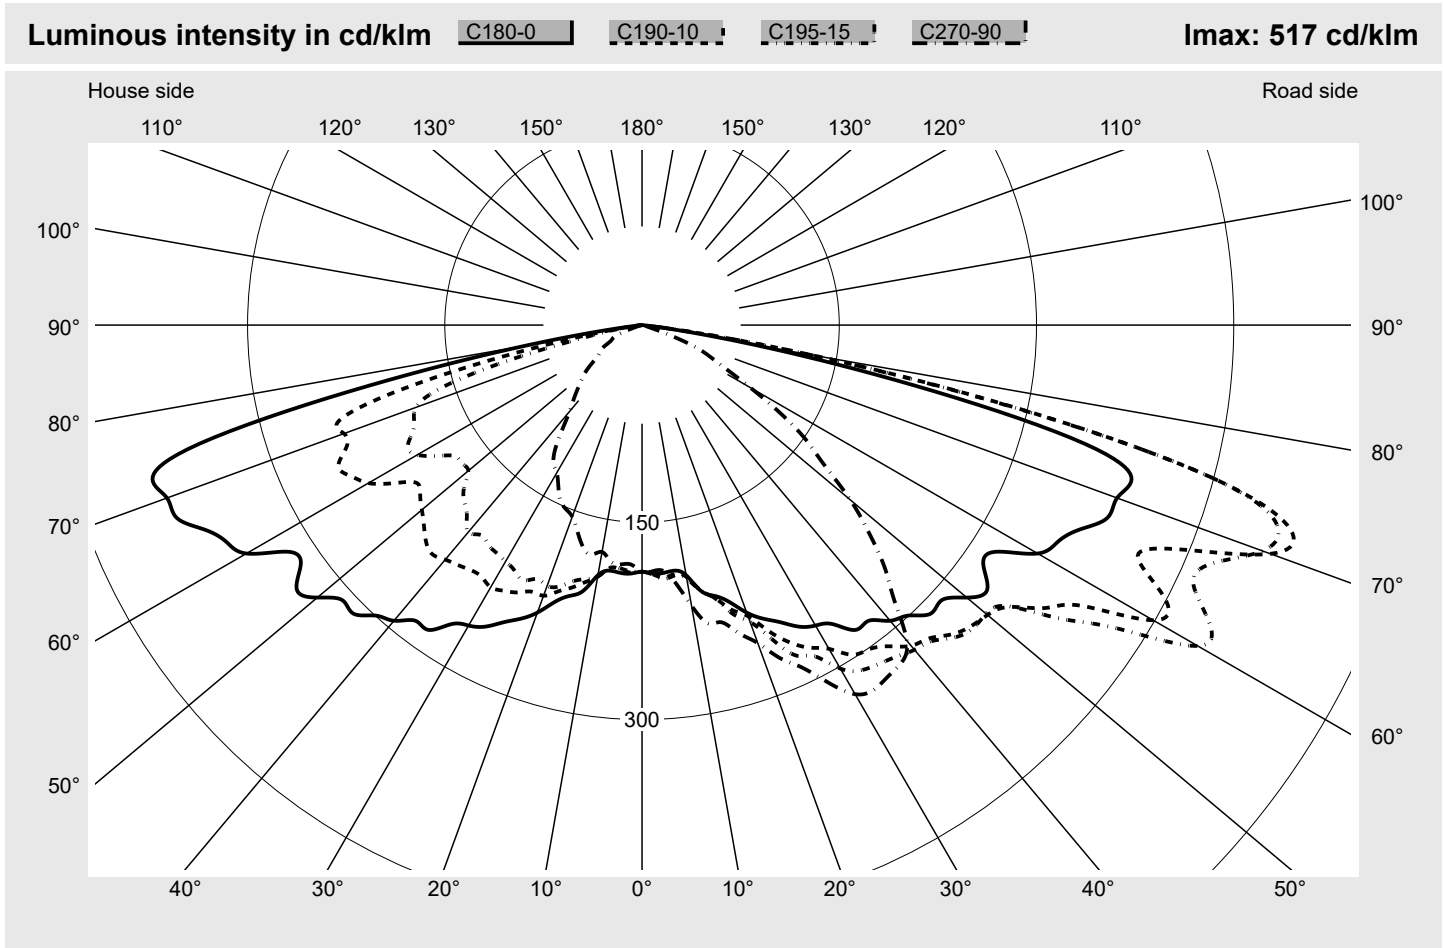

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G2
Eta 0° - 90°	100.0%	Imax 70°	508.6
Eta 90° - 180°	0.0%	Imax 80°	129.6
Measurement conditions		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
		DIN EN 13032 and DIN 5032	

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3J51G08ME EAN: 4058352991893	LP number 59599_192
Envelope curve in cd/klm		KMK 72.5° KMK 70° KMK 67.5° KMK 65°
siteco		

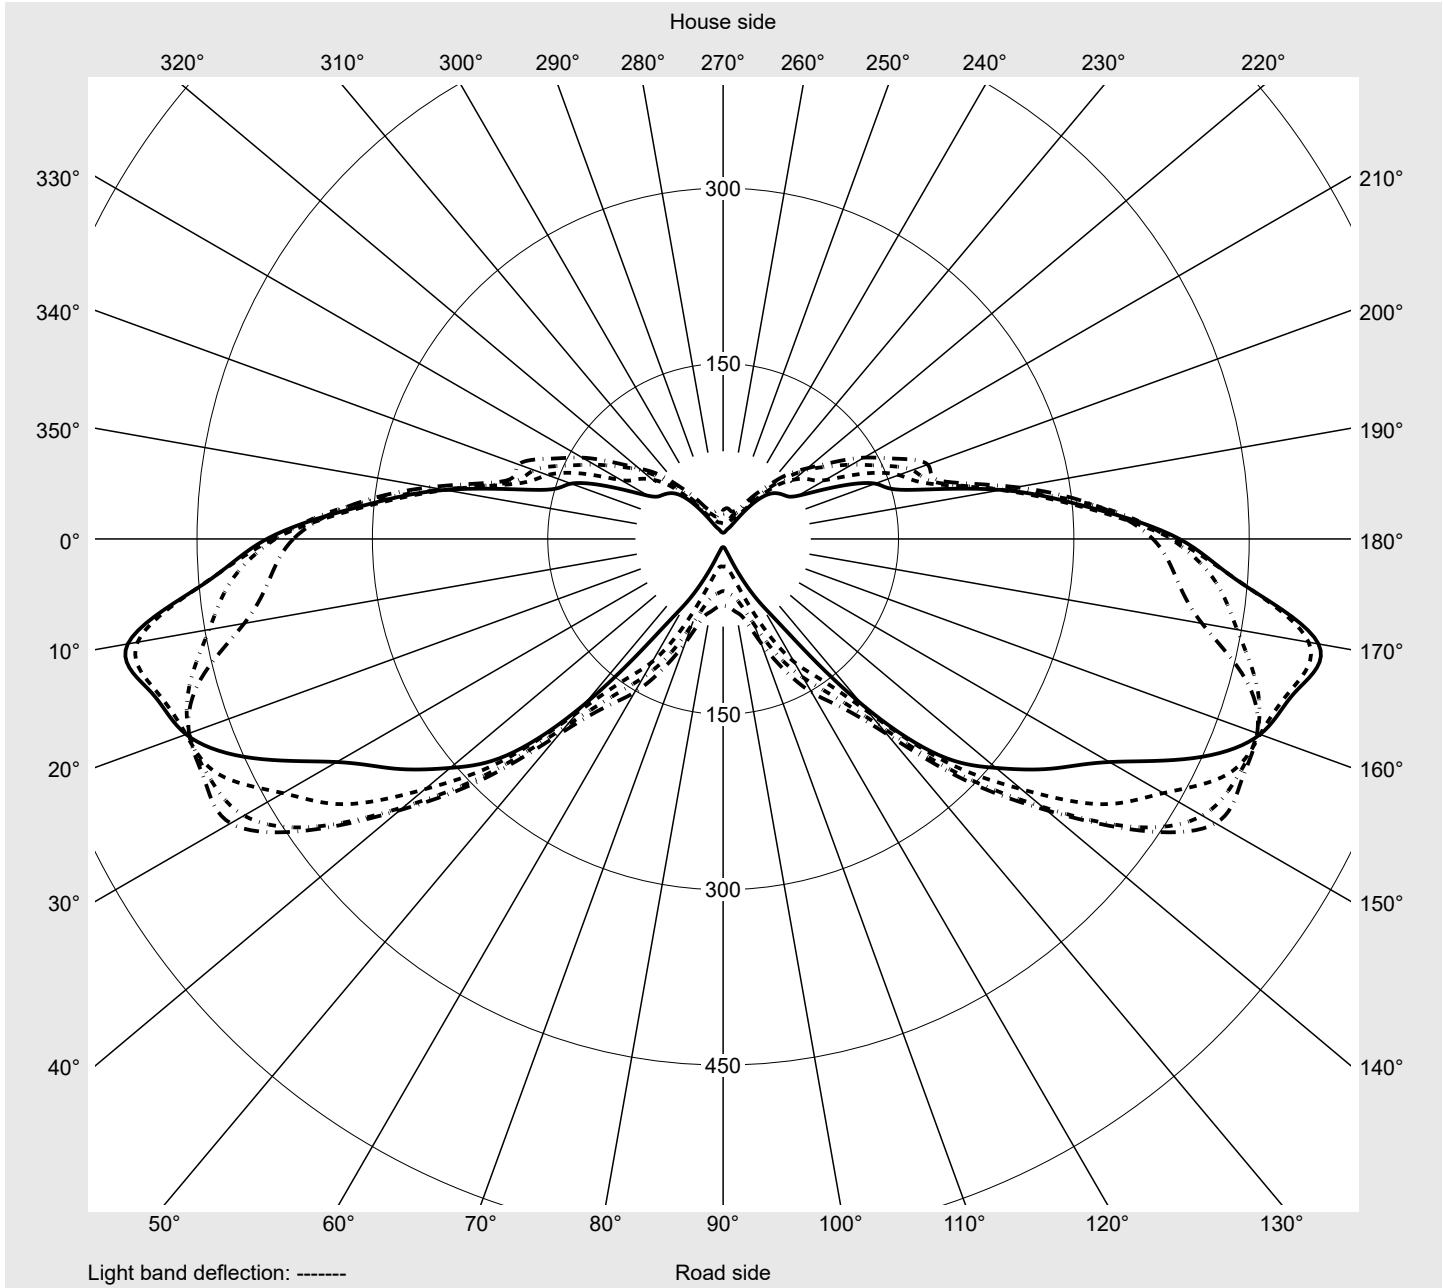

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3J51G08ME EAN: 4058352991893	LP number 59599_192
-----------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6
2,5°	189.1	189.4	189.7	190.1	190.6	191.4	191.4	191.4	191.2	190.9	190.8	190.8	189.9
5,0°	189.1	190.9	192.7	193.8	194.6	195.1	196.0	196.0	196.2	196.1	195.3	193.9	192.8
7,5°	188.4	189.1	190.9	192.0	194.2	196.1	198.2	199.3	198.6	197.2	196.0	195.1	195.6
10,0°	193.1	192.8	194.5	195.7	197.5	199.0	200.7	202.6	203.2	204.5	205.9	206.4	207.3
12,5°	207.1	207.4	206.8	207.0	205.9	204.9	207.6	210.5	213.4	215.9	219.6	221.3	221.0
15,0°	213.2	213.9	215.1	215.3	215.4	216.8	218.3	219.3	221.4	225.0	230.3	233.5	234.7
17,5°	220.8	224.4	227.0	230.5	232.0	233.3	233.1	232.6	231.8	228.7	228.6	234.0	239.3
20,0°	232.7	235.4	235.6	240.2	246.3	248.1	251.0	253.1	250.8	248.0	243.6	243.0	247.2
22,5°	241.8	247.8	251.9	258.6	265.4	268.3	270.2	273.5	273.0	264.4	258.2	259.1	261.4
25,0°	249.4	257.8	266.3	277.3	286.2	290.8	292.6	292.4	289.3	277.1	271.6	273.5	274.2
27,5°	258.6	266.8	276.6	283.8	292.5	300.8	307.3	304.9	298.9	289.9	285.1	281.1	285.8
30,0°	263.8	274.9	284.3	301.7	306.4	311.5	316.4	315.8	311.5	304.2	298.8	295.6	299.7
32,5°	269.6	282.6	297.2	311.1	315.1	325.5	329.9	326.4	325.7	322.3	315.2	311.0	314.7
35,0°	283.0	289.9	301.0	314.5	321.6	329.2	324.5	326.1	326.3	323.5	321.5	317.6	319.1
37,5°	283.4	295.2	307.9	317.8	322.2	328.6	331.2	331.2	328.9	322.7	321.3	313.9	314.8
40,0°	293.5	307.9	318.4	322.3	325.9	332.8	335.7	330.0	329.4	320.2	313.8	310.8	307.8
42,5°	299.7	306.0	323.2	326.0	334.2	341.9	344.5	337.5	327.4	320.8	316.4	311.8	304.4
45,0°	310.4	313.5	332.7	335.9	335.6	345.9	346.1	341.0	334.2	328.8	313.5	298.6	291.8
47,5°	309.4	320.3	339.1	341.3	346.5	357.8	355.3	341.7	336.1	332.7	308.7	279.5	276.5
50,0°	322.4	339.4	343.0	341.5	341.7	354.3	359.8	353.8	335.4	319.9	297.5	273.2	254.5
52,5°	330.8	344.2	352.1	351.2	348.1	359.1	364.3	343.3	324.0	303.4	275.7	247.5	227.2
55,0°	316.8	346.8	375.0	389.5	383.4	376.6	380.4	360.5	332.6	291.1	245.8	224.1	204.6
57,5°	320.7	355.6	397.6	429.8	426.5	416.9	401.5	378.0	334.6	280.5	235.8	208.0	191.6
60,0°	347.4	395.1	448.9	488.1	481.1	459.2	428.0	390.9	339.9	275.8	235.1	206.7	182.0
62,5°	356.6	405.1	447.5	485.3	498.4	483.6	459.4	419.2	348.6	287.8	229.7	195.1	165.7
65,0°	367.6	389.3	415.9	462.5	486.1	489.2	486.4	434.7	360.9	290.9	218.0	175.5	151.5
67,5°	383.1	423.0	446.4	471.8	486.1	484.4	473.2	429.4	356.5	283.3	208.9	163.8	136.7
70,0°	384.5	447.0	508.6	502.2	488.9	476.2	434.8	395.5	332.9	269.7	193.5	147.4	121.4
72,5°	390.3	446.6	517.1	506.5	488.8	443.6	381.6	342.6	304.7	261.8	184.8	101.2	63.2
75,0°	348.3	408.5	449.2	449.2	425.3	358.9	292.4	272.0	244.8	171.5	82.2	30.3	13.1
77,5°	212.3	272.5	293.1	290.5	265.5	234.8	198.2	156.8	93.2	36.0	12.3	5.4	4.9
80,0°	88.8	115.3	129.6	128.3	113.9	98.6	71.2	32.4	10.0	5.0	4.8	4.4	4.0
82,5°	18.0	22.3	25.1	28.5	29.7	20.8	8.6	2.9	3.0	3.1	3.2	3.2	3.0
85,0°	1.5	1.4	1.3	1.3	1.3	1.2	1.0	1.0	1.0	1.0	1.2	1.5	1.6
87,5°	0.8	0.8	0.7	0.7	0.7	0.6	0.6	0.5	0.5	0.5	0.4	0.4	0.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3J51G08ME EAN: 4058352991893	LP number 59599_192
-----------------------------------	--	------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6
2,5°	189.2	188.2	188.3	188.0	187.9	187.3	188.7	188.5	187.5	186.7	186.8	185.8	185.5
5,0°	191.5	190.3	188.9	187.9	188.1	187.7	188.3	186.6	185.7	185.6	184.8	184.5	184.2
7,5°	196.3	196.3	197.0	197.6	197.9	198.3	187.4	186.2	186.0	185.8	185.3	185.1	184.1
10,0°	208.2	209.6	212.5	214.2	216.3	216.7	193.6	194.4	194.1	193.0	190.7	188.8	186.7
12,5°	221.3	222.9	223.4	227.2	230.8	232.3	204.2	200.3	197.9	195.0	193.3	191.6	190.1
15,0°	236.0	235.5	235.7	236.1	234.6	234.0	211.2	206.7	201.6	197.6	194.8	191.1	187.8
17,5°	242.2	243.1	245.4	246.3	246.0	245.8	217.2	212.3	208.3	202.7	195.6	190.9	187.1
20,0°	252.1	256.1	259.5	258.7	255.8	257.3	226.2	219.0	211.0	203.1	196.5	191.2	186.5
22,5°	266.1	271.5	276.3	276.2	275.1	274.1	229.2	219.4	209.0	200.7	195.1	188.5	181.6
25,0°	280.3	283.3	286.0	287.6	287.1	287.2	235.2	224.3	214.1	200.3	190.1	181.8	176.5
27,5°	290.3	294.9	299.3	304.4	309.3	306.4	243.4	227.7	210.3	195.1	186.9	177.4	168.2
30,0°	301.5	305.0	313.5	320.4	325.3	324.1	247.2	230.2	207.5	192.7	181.8	170.5	160.1
32,5°	315.4	313.3	321.2	331.9	331.4	328.6	252.1	227.1	205.6	190.3	177.7	166.0	157.3
35,0°	321.7	321.5	324.9	334.5	333.3	326.2	256.9	227.4	203.9	185.4	172.9	162.7	154.1
37,5°	317.8	320.7	327.1	328.9	327.0	323.8	257.5	230.0	201.2	181.9	167.3	158.7	151.9
40,0°	307.3	310.5	312.3	313.0	311.4	313.2	259.2	232.9	205.7	182.2	167.4	156.0	145.4
42,5°	305.4	303.1	291.1	288.4	285.4	284.0	267.7	236.2	197.2	174.9	162.2	148.5	139.8
45,0°	290.8	284.4	277.0	272.8	265.0	261.1	275.9	232.4	190.8	167.2	159.5	146.7	134.0
47,5°	270.6	255.9	246.6	242.7	234.4	234.3	272.0	225.0	183.7	166.1	158.9	145.7	131.9
50,0°	241.3	228.6	222.0	212.9	205.7	206.8	273.0	218.6	172.5	164.5	157.6	142.5	128.6
52,5°	214.3	205.4	196.5	180.2	174.2	174.7	269.4	212.7	172.7	162.4	153.3	140.9	125.8
55,0°	190.7	179.3	168.0	149.3	147.3	152.3	261.5	209.3	173.7	162.6	152.1	138.5	125.9
57,5°	172.4	150.1	133.4	126.9	123.7	124.8	270.7	223.7	185.2	166.8	152.0	136.9	120.4
60,0°	153.5	126.7	108.7	103.7	98.3	95.0	283.7	240.3	197.4	180.7	159.1	141.2	120.8
62,5°	137.5	108.9	90.1	82.0	74.6	71.9	301.0	249.2	200.9	188.4	164.4	142.9	116.9
65,0°	123.3	94.4	71.3	63.4	58.7	57.3	321.5	254.8	192.5	186.2	162.5	139.1	114.1
67,5°	109.4	78.0	58.2	49.5	46.5	44.6	321.8	243.5	187.7	172.1	148.4	127.0	107.7
70,0°	86.9	53.4	34.8	26.2	23.6	23.7	309.9	241.2	182.8	159.9	132.1	100.7	89.1
72,5°	35.7	17.6	10.9	8.0	7.2	7.0	313.4	241.5	162.1	138.4	104.7	73.8	64.8
75,0°	6.0	5.1	4.6	4.2	3.8	3.6	256.9	189.9	109.6	95.2	79.3	59.6	52.0
77,5°	4.5	4.1	3.8	3.4	3.0	2.9	160.2	101.0	50.6	48.8	49.7	40.8	30.9
80,0°	3.6	3.2	2.9	2.5	2.2	2.1	62.6	36.5	23.8	23.4	21.7	16.7	10.2
82,5°	2.8	2.5	2.0	1.7	1.5	1.4	12.4	8.0	6.0	5.5	4.8	3.3	2.6
85,0°	1.6	1.5	1.2	0.9	0.7	0.6	1.6	1.6	1.6	1.5	1.5	1.4	1.3
87,5°	0.3	0.3	0.3	0.3	0.1	0.1	0.8	0.8	0.8	0.8	0.7	0.7	0.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED		Order number: 5XC3J51G08ME EAN: 4058352991893										LP number 59599_192	
Table of values for luminous intensities										Maximum luminous intensity		sīTeco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	187.6	0.3	0.3
2,5°	184.9	184.3	182.8	182.5	182.9	182.3	182.0	181.5	181.6	182.2	182.4	2.2	2.5
5,0°	183.4	182.4	182.6	182.3	182.0	182.0	181.9	182.3	183.4	183.0	182.7	4.5	7.0
7,5°	183.2	183.3	182.2	181.8	180.9	180.2	180.5	181.0	181.4	182.1	181.4	6.8	13.8
10,0°	185.3	184.9	185.3	185.6	184.5	183.8	182.3	181.0	177.2	176.3	175.2	9.3	23.1
12,5°	188.2	185.6	184.4	184.6	183.6	182.2	180.8	179.6	179.7	179.1	178.8	12.0	35.1
15,0°	185.3	183.5	181.4	179.6	177.4	176.4	174.6	174.8	175.5	174.7	174.3	14.6	49.7
17,5°	183.8	180.2	176.7	173.6	171.5	169.0	166.5	166.3	166.5	165.1	163.9	17.3	67.0
20,0°	180.6	178.8	175.2	170.8	168.8	166.9	163.2	159.9	157.7	156.3	155.1	20.2	87.3
22,5°	176.9	171.7	169.0	166.0	163.9	160.2	158.0	157.1	154.5	152.5	151.4	23.4	110.7
25,0°	170.6	165.6	162.3	159.6	155.4	151.0	148.8	147.9	146.3	146.6	147.0	26.4	137.1
27,5°	163.4	161.2	157.4	153.8	147.7	143.4	140.5	139.9	140.0	137.8	137.9	29.3	166.5
30,0°	154.1	152.3	148.7	142.7	139.5	137.0	135.7	134.0	130.7	129.5	129.7	32.3	198.7
32,5°	150.3	145.6	140.8	135.7	132.8	128.2	124.1	122.4	122.0	123.1	125.2	35.1	233.8
35,0°	146.1	139.9	132.0	126.7	124.1	117.4	111.6	108.6	111.6	114.0	115.1	37.3	271.2
37,5°	141.8	135.1	127.6	120.4	113.6	108.7	105.6	101.3	99.1	99.0	99.1	39.2	310.4
40,0°	137.6	128.7	120.7	111.5	103.5	97.6	94.8	92.9	90.7	87.5	85.6	40.7	351.1
42,5°	130.8	122.7	110.3	103.5	96.6	90.8	86.7	83.7	81.0	78.3	77.1	42.0	393.1
45,0°	126.1	116.1	105.3	96.9	91.3	82.7	80.4	79.2	72.3	68.9	69.6	43.1	436.2
47,5°	118.5	108.0	98.7	89.8	80.1	73.5	71.3	68.3	63.3	60.6	62.9	43.6	479.7
50,0°	116.2	101.3	90.2	84.0	75.4	67.5	63.3	60.4	56.9	55.5	56.8	43.8	523.5
52,5°	113.1	96.2	82.5	75.1	69.1	62.2	55.8	52.4	50.7	49.4	48.5	43.5	567.0
55,0°	109.5	89.8	77.7	67.8	61.2	55.6	49.4	45.7	42.9	41.5	41.1	43.8	610.8
57,5°	105.8	88.0	75.5	61.7	53.6	48.0	42.9	40.0	38.9	38.8	38.3	45.0	655.9
60,0°	104.3	88.1	72.7	56.3	46.8	39.5	36.6	34.8	33.9	34.0	34.7	47.5	703.4
62,5°	97.7	83.9	68.4	53.1	39.0	33.0	30.5	30.0	29.6	28.6	27.7	48.5	751.9
65,0°	94.0	78.2	59.3	44.6	32.3	27.4	24.9	24.9	26.2	26.2	24.9	48.2	800.1
67,5°	91.3	71.2	50.3	33.6	26.9	23.6	20.7	20.3	22.2	22.5	21.6	47.9	848.0
70,0°	78.9	64.3	44.4	28.0	21.7	19.1	16.1	14.6	14.2	13.7	13.2	46.3	894.4
72,5°	60.7	53.7	39.3	20.5	12.0	9.6	7.8	6.3	5.7	5.4	5.3	42.4	936.8
75,0°	42.2	33.3	19.7	10.2	5.1	4.0	3.6	3.5	3.5	3.3	3.3	33.4	970.2
77,5°	22.1	14.1	7.8	4.9	3.3	3.0	2.8	2.6	2.6	2.5	2.4	19.7	989.9
80,0°	6.4	4.3	3.3	3.2	2.4	2.2	2.1	1.9	1.8	1.7	1.7	7.9	997.7
82,5°	2.2	1.9	1.8	1.7	1.6	1.5	1.4	1.3	1.2	1.1	1.1	1.8	999.5
85,0°	1.3	1.2	1.1	1.0	0.9	0.8	0.8	0.7	0.7	0.6	0.6	0.3	999.9
87,5°	0.6	0.6	0.6	0.5	0.5	0.4	0.3	0.3	0.3	0.2	0.2	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3J51G08ME EAN: 4058352991893	LP number 59599_192
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	17640	122.6	130.2	126.4
95	241	252	16737	115.1	122.2	118.6
90	229	250	15904	108.2	114.8	111.5
85	216	248	15001	101.1	107.2	104.2
80	203	246	14098	94.1	99.8	96.9
75	190	243	13195	87.3	92.6	89.9
70	178	241	12362	81.2	86.1	83.6
65	165	238	11459	74.7	79.2	77.0
60	152	235	10556	68.2	72.3	70.2
55	140	232	9723	62.4	66.2	64.3
50	127	229	8820	56.1	59.6	57.8
45	114	225	7917	50.0	53.0	51.5
40	102	221	7084	44.5	47.1	45.8
35	89	216	6181	38.6	40.9	39.8
30	76	210	5278	32.9	34.7	33.8
25	63	203	4375	27.2	28.8	28.0
20	51	195	3542	22.1	23.3	22.7
15	38	184	2639	16.7	17.5	17.1
13	33	179	2292	14.7	15.4	15.0