




Photometric test report

Family Licross® 11 Protected	Order number: 51TD11CN4EXS EAN: 4058352928523	LP number 58525_211
	Version prismatic cover, frosted, narrow distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-Multilumen CLOi Rated values Net luminous flux = 14460 lm Power consumption = 77.6 W Luminous efficacy = 186.3 lm/W	serial documentation 14.11.2025





Luminous intensity in cd/klm C180-0 C270-90 **Imax: 2130 cd/klm**

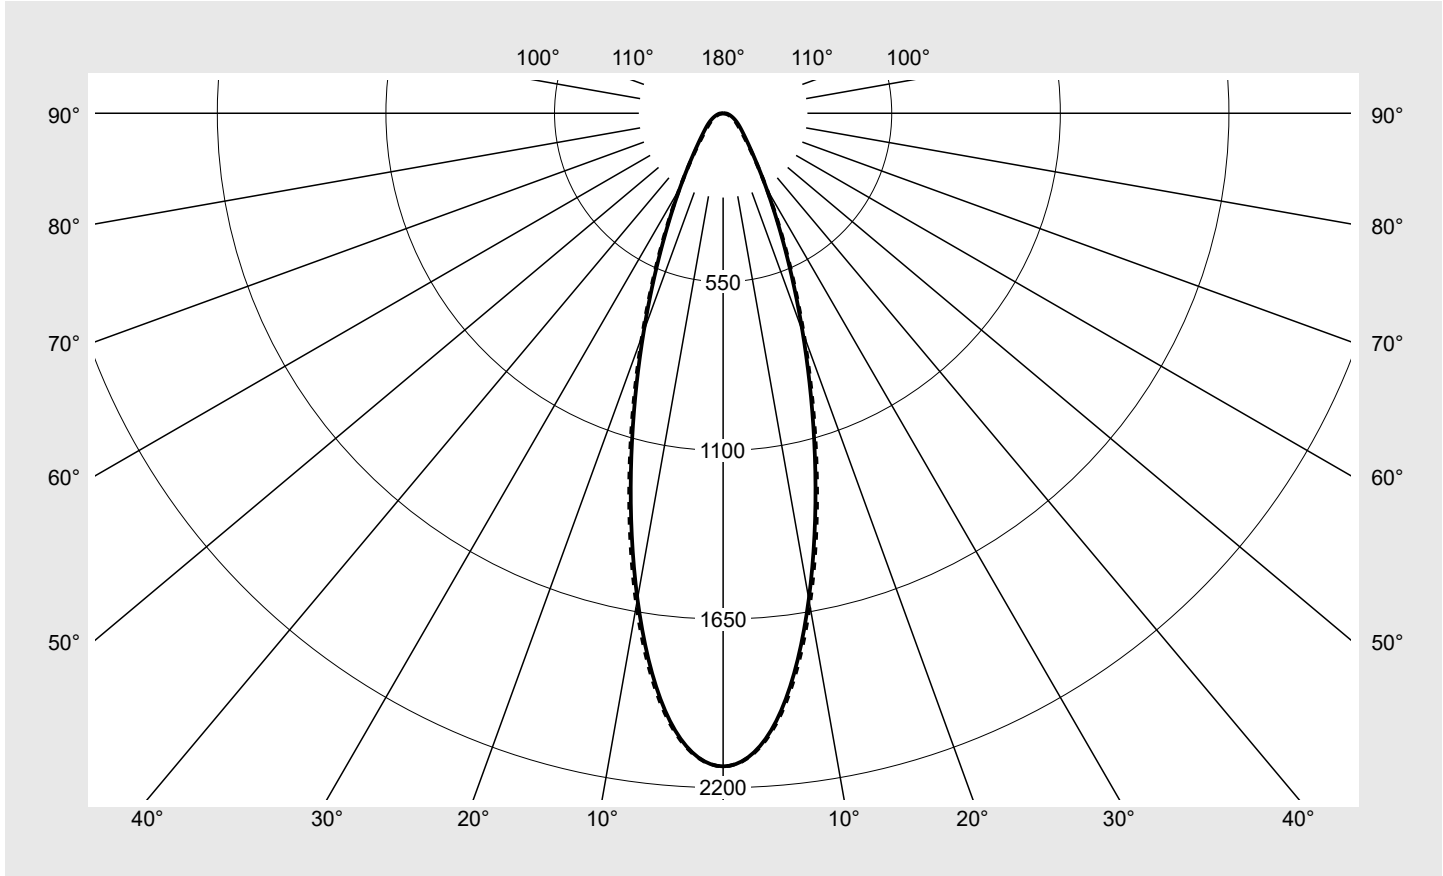

Classifications	
DIN 5040	A 7 1
CIE	N1=84 N2=94 N3=98 N4=99 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	99.1%
ϕ_o	0.9%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Protected	Order number: 51TD11CN4EXS EAN: 4058352928523	LP number 58525_211
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	2130.5	2130.5	2130.5	2130.5	2130.5	2130.5	2130.5	12.7	12.7
5°	1990.0	1982.4	1972.8	1980.9	1991.5	1994.0	1997.3	94.9	107.6
10°	1609.4	1602.7	1594.9	1604.0	1616.7	1623.6	1628.9	153.3	260.9
15°	1156.5	1152.7	1146.1	1151.7	1161.7	1170.4	1176.7	164.3	425.2
20°	757.1	754.5	751.0	754.8	760.5	766.7	772.3	142.2	567.4
25°	464.1	463.3	461.4	464.7	468.5	471.4	475.4	108.1	675.5
30°	281.8	280.0	276.3	277.8	280.6	282.2	284.6	76.7	752.2
35°	178.8	175.8	169.5	168.1	169.9	172.0	174.0	54.1	806.3
40°	123.8	119.7	111.6	107.8	108.9	112.2	115.0	39.9	846.2
45°	92.5	87.9	79.0	74.1	74.5	78.8	82.8	31.1	877.3
50°	72.9	68.3	60.1	54.9	54.7	59.1	63.7	25.6	902.9
55°	58.5	54.5	47.8	42.9	42.0	45.8	50.2	21.5	924.4
60°	46.6	43.5	38.6	34.6	32.9	35.6	39.1	18.0	942.5
65°	36.7	34.5	31.1	28.0	26.1	27.3	29.5	14.9	957.4
70°	28.5	27.0	24.6	22.5	20.4	20.1	21.2	12.0	969.4
75°	21.8	20.7	19.0	17.5	15.4	14.0	14.0	9.2	978.6
80°	16.2	15.4	14.3	12.9	10.9	8.9	8.1	6.7	985.3
85°	11.7	11.2	10.3	9.1	7.1	4.7	3.5	4.6	989.8
90°	8.1	7.7	6.9	5.8	3.9	1.7	0.3	2.8	992.6
95°	6.9	6.6	5.8	4.7	3.0	1.1	0.2	2.3	994.8
100°	6.0	5.6	4.9	3.8	2.2	0.6	0.2	1.8	996.7
105°	5.1	4.8	4.0	2.9	1.5	0.3	0.2	1.4	998.1
110°	4.3	4.0	3.2	2.2	0.9	0.2	0.2	1.1	999.2
115°	3.6	3.2	2.5	1.6	0.5	0.3	0.3	0.8	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Protected	Order number: 51TD11CN4EXS EAN: 4058352928523	LP number 58525_211
--	--	-------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	17.3	18.6	17.7	18.9	19.2	17.0	18.2	17.3	18.5	18.8
	3H	18.4	19.5	18.8	19.8	20.2	17.9	19.0	18.3	19.3	19.7
	4H	18.9	19.9	19.3	20.3	20.6	18.3	19.3	18.7	19.6	20.0
	6H	19.4	20.3	19.8	20.7	21.0	18.6	19.4	19.0	19.8	20.2
	8H	19.7	20.4	20.1	20.8	21.2	18.7	19.5	19.2	19.9	20.3
	12H	19.9	20.6	20.3	21.0	21.4	18.8	19.5	19.2	19.9	20.3
4H	2H	17.6	18.6	18.0	18.9	19.3	17.3	18.3	17.7	18.6	19.0
	3H	18.9	19.7	19.3	20.1	20.5	18.4	19.2	18.8	19.6	20.0
	4H	19.5	20.2	20.0	20.7	21.1	18.8	19.6	19.3	20.0	20.4
	6H	20.1	20.8	20.6	21.2	21.7	19.2	19.9	19.7	20.3	20.8
	8H	20.4	21.0	20.9	21.4	21.9	19.4	19.9	19.9	20.4	20.9
	12H	20.7	21.2	21.2	21.7	22.2	19.5	20.0	20.0	20.4	20.9
8H	4H	19.7	20.2	20.2	20.7	21.2	19.1	19.6	19.6	20.1	20.6
	6H	20.5	20.9	21.0	21.4	21.9	19.6	20.1	20.1	20.5	21.1
	8H	20.8	21.2	21.3	21.7	22.3	19.8	20.2	20.3	20.7	21.2
	12H	21.2	21.6	21.8	22.1	22.6	20.0	20.3	20.5	20.8	21.4
12H	4H	19.7	20.2	20.2	20.6	21.1	19.2	19.6	19.6	20.1	20.6
	6H	20.5	20.9	21.0	21.4	21.9	19.7	20.1	20.2	20.6	21.1
	8H	20.9	21.3	21.5	21.8	22.3	20.0	20.3	20.5	20.8	21.3


Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		14049.4	13405.0	12232.0	11744.6	12186.3	13385.1	14658.9	
50°		11853.1	11169.6	9999.3	9387.0	9688.4	10959.6	12404.8	
55°		10325.8	9683.3	8653.4	8022.2	8191.2	9428.6	10964.8	
60°		9068.4	8529.5	7735.8	7189.0	7212.1	8304.1	9795.3	
65°		8015.1	7602.1	7047.5	6634.1	6568.5	7394.9	8733.7	
70°		7154.1	6848.6	6452.9	6215.6	6093.3	6594.8	7755.0	
75°		6490.6	6250.0	5972.1	5870.2	5687.6	5821.4	6781.8	
80°		6017.1	5822.0	5667.0	5582.3	5323.1	5132.0	5809.7	
85°		5803.7	5650.4	5583.8	5591.9	5199.7	4566.5	5018.7	

Photometric test report

Family Licross® 11 Protected	Order number: 51TD11CN4EXS EAN: 4058352928523	LP number 58525_211
---	--	--------------------------------------

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

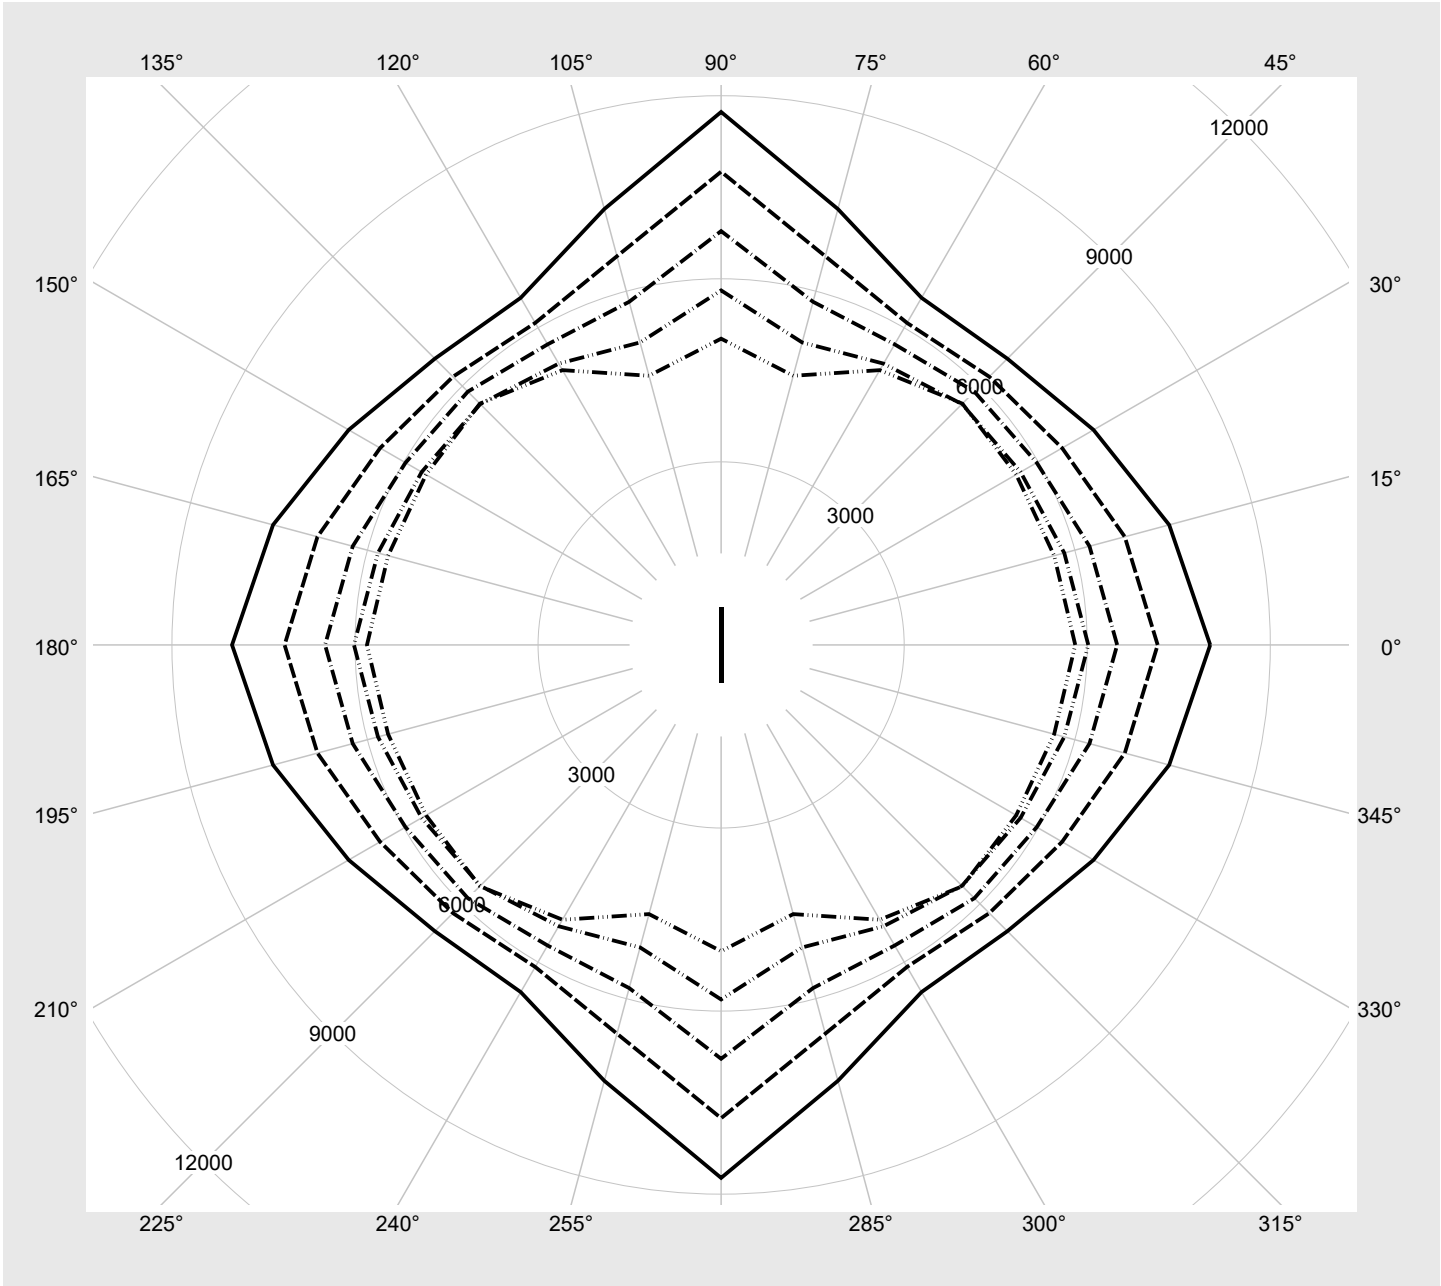

Photometric test report

Family Licross® 11 Protected	Order number: 51TD11CN4EXS EAN: 4058352928523	LP number 58525_211
--	--	--------------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption	Power consumption
	1	2	3			end of lifetime [W]	average [W]
1	A	C	E	14460	77.6	81.7	79.6
2	A	C	F	13200	70.1	74.1	72.1
3	A	D	E	12220	64.4	67.9	66.2
4	A	D	F	11150	58.3	61.3	59.8
5	B	C	E	10150	52.6	55.6	54.1
6	B	C	F	9130	47.0	49.6	48.3
7	B	D	E	8110	41.5	43.6	42.6
8	B	D	F	7070	36.1	38.2	37.2