


## Photometric test report

<b>Family</b> Lunis mini Spot	<b>Order number: 51DH11CD3FG22</b> <b>EAN: 4058352107980</b>	<b>LP number</b> 57186_27
<b>Version</b>	prismatic diffuser, darklight reflector, highly specular, narrow distribution	<b>serial documentation</b> 27.07.2017
<b>Lamps</b>	LED 4000K / CRI ≥ 80	
<b>Controlgear</b>	ECG-DALI	
<b>Rated values</b>	Net luminous flux = 2760 lm Power consumption = 27.4 W Luminous efficacy = 100.7 lm/W	

siteco

**Luminous intensity in cd/klm** C180-0 **Imax: 3605 cd/klm**

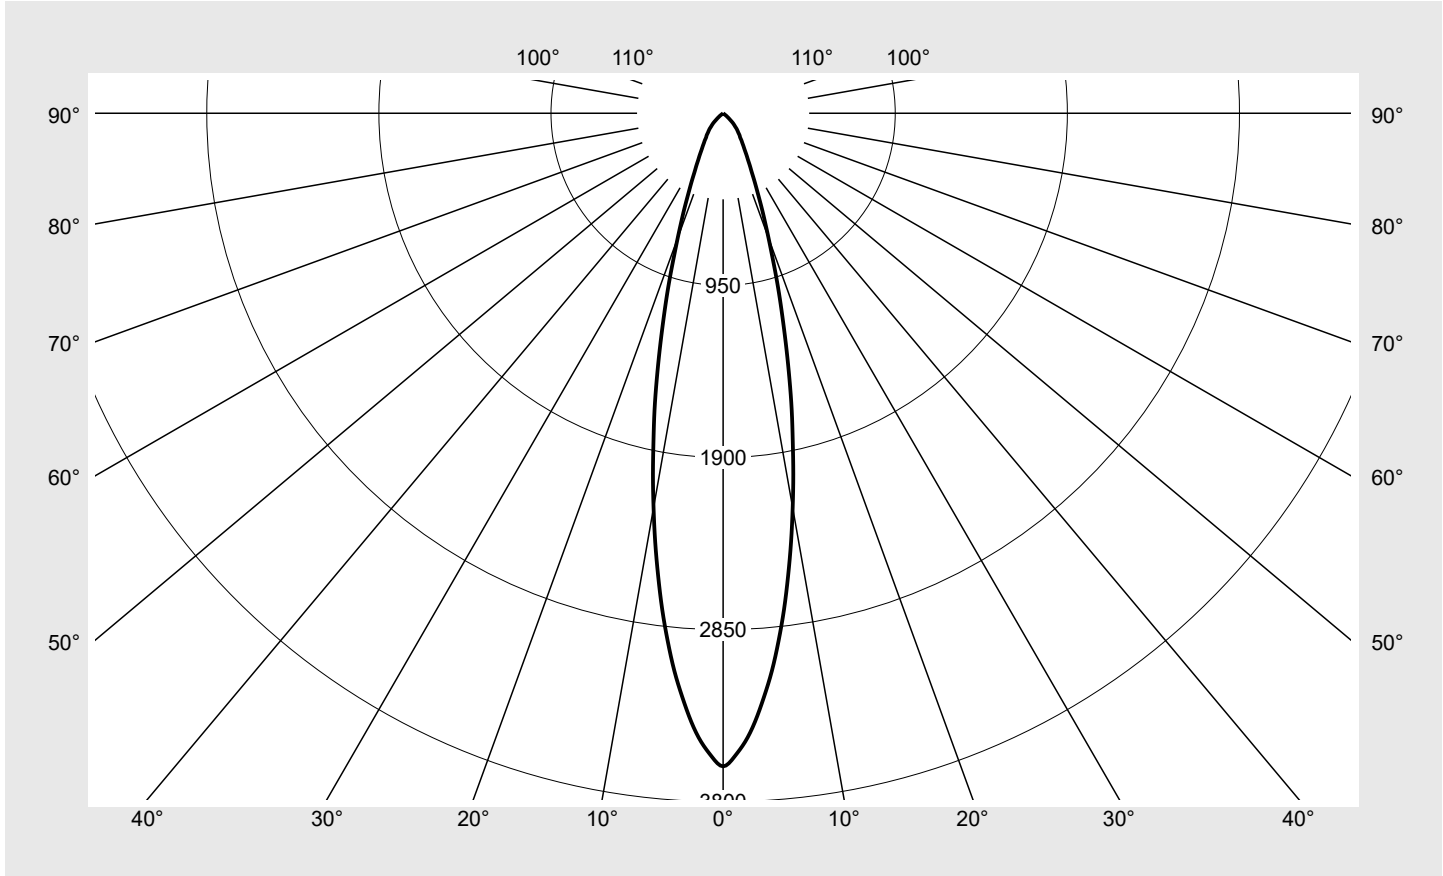

Classifications	
DIN 5040	A 8 0
CIE	N1=95 N2=100 N3=100 N4=100 N5=100

Luminaire light output ratios	
$\eta_{LB}$	100.0%
$\phi_u$	100.0%
$\phi_o$	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

## Photometric test report

<b>Family</b> Lunis mini Spot	<b>Order number: 51DH11CD3FG22</b> <b>EAN: 4058352107980</b>	<b>LP number</b> 57186_27
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	3604.7	0.9	0.9
1°	3552.4	6.8	7.7
2°	3471.8	13.3	20.9
3°	3363.0	19.3	40.2
4°	3230.2	24.7	65.0
5°	3089.2	29.5	94.5
6°	2928.1	33.6	128.0
7°	2758.9	36.9	164.9
8°	2577.7	39.3	204.3
9°	2396.4	41.1	245.4
10°	2211.1	42.1	287.5
11°	2029.9	42.5	329.9
12°	1848.6	42.1	372.1
13°	1683.5	41.5	413.6
14°	1514.4	40.2	453.8
15°	1353.3	38.4	492.2
16°	1204.2	36.4	528.6
17°	1071.3	34.3	563.0
18°	946.5	32.1	595.0
19°	829.7	29.6	624.7
20°	733.0	27.5	652.1
21°	648.4	25.5	677.6
22°	575.9	23.7	701.3
23°	507.5	21.7	723.0
24°	451.1	20.1	743.2
25°	402.8	18.7	761.8
26°	358.5	17.2	779.0
27°	326.2	16.2	795.3
28°	294.0	15.1	810.4
29°	269.8	14.3	824.8
30°	245.7	13.5	838.2
31°	225.5	12.7	851.0
32°	209.4	12.2	863.2
33°	193.3	11.5	874.7
34°	181.2	11.1	885.8
35°	165.1	10.4	896.2
36°	157.1	10.1	906.3
37°	149.0	9.8	916.2
38°	136.9	9.2	925.4
39°	128.9	8.9	934.3
40°	120.8	8.5	942.8
41°	112.8	8.1	950.9
42°	100.7	7.4	958.3
43°	92.6	6.9	965.2
44°	84.6	6.4	971.7
45°	76.5	5.9	977.6
46°	64.4	5.1	982.7

C-planes	0°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm		Luminous flux in lm/klm
47°	52.4	4.2	986.9
48°	44.3	3.6	990.5
49°	36.2	3.0	993.5
50°	28.2	2.4	995.9
51°	24.2	2.1	997.9
52°	16.1	1.4	999.3
53°	8.1	0.7	1000.0
54°	0.0	0.0	1000.0
55°	0.0	0.0	1000.0
56°	0.0	0.0	1000.0
57°	0.0	0.0	1000.0
58°	0.0	0.0	1000.0
59°	0.0	0.0	1000.0
60°	0.0	0.0	1000.0
61°	0.0	0.0	1000.0
62°	0.0	0.0	1000.0
63°	0.0	0.0	1000.0
64°	0.0	0.0	1000.0
65°	0.0	0.0	1000.0
66°	0.0	0.0	1000.0
67°	0.0	0.0	1000.0
68°	0.0	0.0	1000.0
69°	0.0	0.0	1000.0
70°	0.0	0.0	1000.0
71°	0.0	0.0	1000.0
72°	0.0	0.0	1000.0
73°	0.0	0.0	1000.0
74°	0.0	0.0	1000.0
75°	0.0	0.0	1000.0
76°	0.0	0.0	1000.0
77°	0.0	0.0	1000.0
78°	0.0	0.0	1000.0
79°	0.0	0.0	1000.0
80°	0.0	0.0	1000.0
81°	0.0	0.0	1000.0
82°	0.0	0.0	1000.0
83°	0.0	0.0	1000.0
84°	0.0	0.0	1000.0
85°	0.0	0.0	1000.0
86°	0.0	0.0	1000.0
87°	0.0	0.0	1000.0
88°	0.0	0.0	1000.0
89°	0.0	0.0	1000.0
90°	0.0	0.0	1000.0

## Photometric test report

Family Lunis mini Spot	Order number: 51DH11CD3FG22 EAN: 4058352107980	LP number 57186_27
---------------------------	---	-----------------------

UGR-Table	Standard room	siteco								
-----------	---------------	--------	--	--	--	--	--	--	--	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	15.5	16.5	15.8	16.8	17.1	15.5	16.5	15.8	16.8	17.1
	3H	15.3	16.2	15.7	16.5	16.9	15.3	16.2	15.7	16.5	16.9
	4H	15.2	16.0	15.6	16.4	16.8	15.2	16.0	15.6	16.4	16.8
	6H	15.1	15.8	15.6	16.2	16.6	15.1	15.8	15.6	16.2	16.6
	8H	15.2	15.8	15.6	16.1	16.6	15.2	15.8	15.6	16.1	16.6
	12H	15.1	15.7	15.6	16.1	16.5	15.1	15.7	15.6	16.1	16.5
4H	2H	15.2	16.0	15.6	16.4	16.8	15.2	16.0	15.6	16.4	16.8
	3H	15.0	15.7	15.5	16.1	16.5	15.0	15.7	15.5	16.1	16.5
	4H	14.9	15.5	15.3	15.9	16.3	14.9	15.5	15.3	15.9	16.3
	6H	14.8	15.3	15.3	15.7	16.2	14.8	15.3	15.3	15.7	16.2
	8H	14.8	15.2	15.2	15.6	16.1	14.8	15.2	15.2	15.6	16.1
	12H	14.7	15.1	15.2	15.5	16.0	14.7	15.1	15.2	15.5	16.0
8H	4H	14.8	15.2	15.2	15.6	16.1	14.8	15.2	15.2	15.6	16.1
	6H	14.6	15.0	15.1	15.4	16.0	14.6	15.0	15.1	15.4	16.0
	8H	14.5	14.8	15.1	15.3	15.9	14.5	14.8	15.1	15.3	15.9
	12H	14.5	14.7	15.0	15.2	15.8	14.5	14.7	15.0	15.2	15.8
12H	4H	14.7	15.1	15.2	15.5	16.0	14.7	15.1	15.2	15.5	16.0
	6H	14.6	14.8	15.1	15.3	15.9	14.6	14.8	15.1	15.3	15.9
	8H	14.5	14.7	15.0	15.2	15.8	14.5	14.7	15.0	15.2	15.8

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 143
-----------------	---------------------------------	---------------------------------------

C-planes	0°
$\gamma$	Luminance in cd/m <sup>2</sup>
45°	18597.7
50°	7537.4
55°	0.0
60°	0.0
65°	0.0
70°	0.0
75°	0.0
80°	0.0
85°	0.0

**Photometric test report**

<b>Family</b> Lunis mini Spot	<b>Order number: 51DH11CD3FG22</b> <b>EAN: 4058352107980</b>	<b>LP number</b> 57186_27
----------------------------------	---	------------------------------

**Luminance values in cd/m<sup>2</sup>**       $\gamma$  65°      $\gamma$  70°      $\gamma$  75°      $\gamma$  80°      $\gamma$  85°

