

Photometric test report

Family
Highbay 31



Order number: 51HC41DA4MMB
EAN: 4058352700112

LP number
59122_4


Version	primary light control with lens, PC, clear, medium distribution
Lamps	LED 4000 K CRI ≥ 80
Controlgear	ECG-DALI
Rated values	Net luminous flux = 28000 lm Power consumption = 187.0 W Luminous efficacy = 149.7 lm/W

serial documentation
16.01.2023

sitereco

Luminous intensity in cd/klm C180-0

I_{max}: 1120 cd/klm

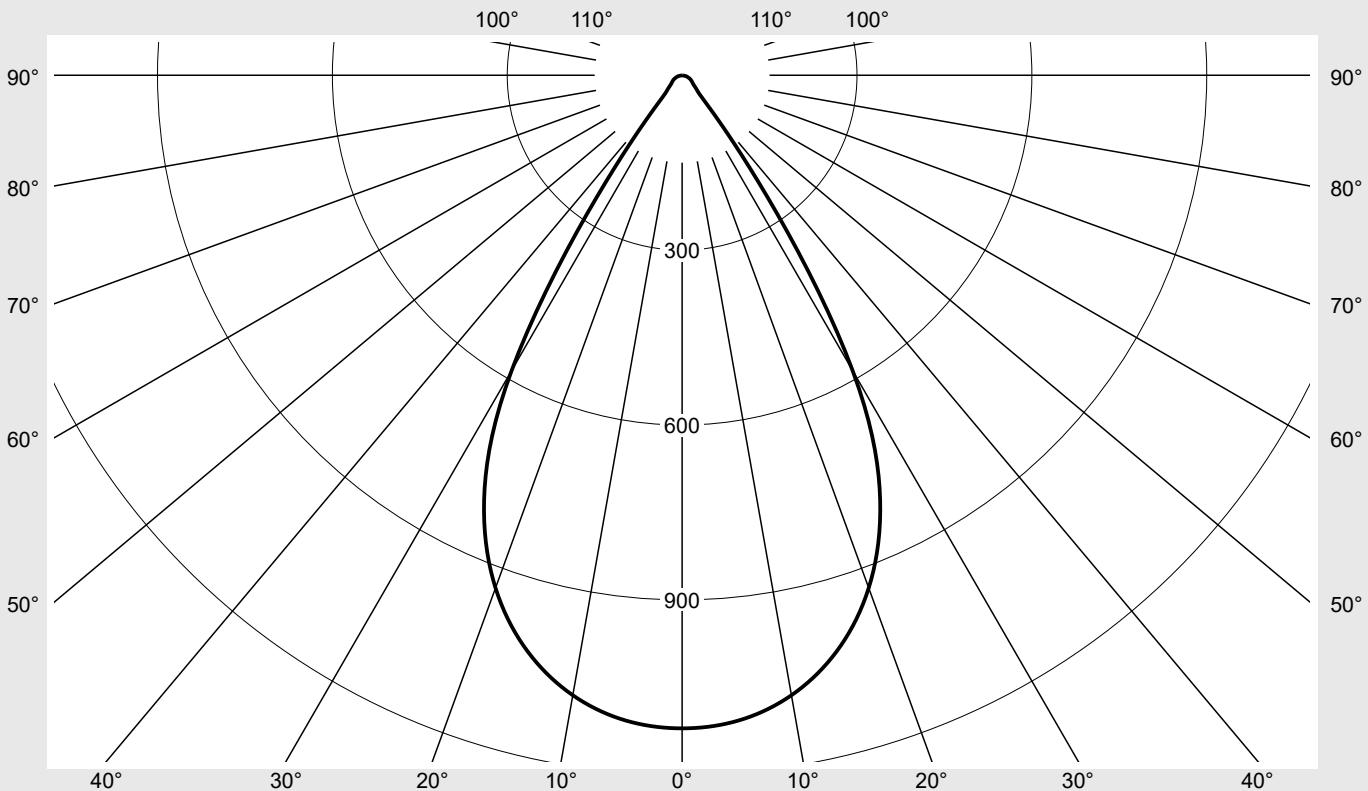

Classifications

DIN 5040 A 7 0
CIE N1=93 N2=98 N3=100
N4=100 N5=100

Luminaire light output ratios

η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

**Family
Highbay 31**

**Order number: 51HC41DA4MMB
EAN: 4058352700112**

**LP number
59122_4**

Table of values for luminous intensities

Maximum luminous intensity

sitereco

C-planes	0°	Phi-zone	Total Phi-zone
Luminous intensity in cd/klm Luminous flux in lm/klm			
0°	1120.4	6.7	6.7
5°	1111.2	53.1	59.8
10°	1080.0	102.8	162.6
15°	1023.5	145.2	307.8
20°	936.0	175.5	483.3
25°	803.9	186.2	669.5
30°	584.9	160.3	829.8
35°	255.7	80.4	910.2
40°	73.8	26.0	936.2
45°	36.2	14.0	950.2
50°	26.3	11.0	961.2
55°	21.4	9.6	970.8
60°	18.2	8.6	979.5
65°	14.9	7.4	986.9
70°	11.3	5.8	992.7
75°	7.8	4.1	996.8
80°	4.5	2.4	999.2
85°	1.4	0.8	1000.0
90°	0.0	0.0	1000.0
95°	0.0	0.0	1000.0
100°	0.0	0.0	1000.0
105°	0.0	0.0	1000.0
110°	0.0	0.0	1000.0
115°	0.0	0.0	1000.0
120°	0.0	0.0	1000.0
125°	0.0	0.0	1000.0
130°	0.0	0.0	1000.0
135°	0.0	0.0	1000.0
140°	0.0	0.0	1000.0
145°	0.0	0.0	1000.0
150°	0.0	0.0	1000.0
155°	0.0	0.0	1000.0
160°	0.0	0.0	1000.0
165°	0.0	0.0	1000.0
170°	0.0	0.0	1000.0
175°	0.0	0.0	1000.0
180°	0.0	0.0	1000.0

Photometric test report

Family Highbay 31		Order number: 51HC41DA4MMB EAN: 4058352700112								LP number 59122_4								
UGR-Table		Standard room								sitereco								
Reflection factor of ceiling 0.7 0.7 0.5 0.5 0.3 0.7 0.7 0.5 0.5 0.5 0.3																		
Reflection factor of walls 0.5 0.3 0.5 0.3 0.3 0.5 0.3 0.5 0.3 0.3 0.3																		
Reflection factor of floor 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2 0.2																		
Room dimensions																		
x	y	View crosswise (C0)					View endwise (C90)											
2H	2H	18.6	19.8	19.0	20.1	20.4	18.6	19.8	19.0	20.1	20.4							
	3H	19.0	20.0	19.3	20.3	20.7	19.0	20.0	19.3	20.3	20.7							
	4H	19.1	20.1	19.5	20.4	20.8	19.1	20.1	19.5	20.4	20.8							
	6H	19.2	20.1	19.6	20.4	20.8	19.2	20.1	19.6	20.4	20.8							
	8H	19.4	20.1	19.8	20.5	20.9	19.4	20.1	19.8	20.5	20.9							
	12H	19.4	20.0	19.8	20.4	20.8	19.4	20.0	19.8	20.4	20.8							
4H	2H	18.6	19.6	19.0	19.9	20.3	18.6	19.6	19.0	19.9	20.3							
	3H	19.1	19.9	19.5	20.3	20.7	19.1	19.9	19.5	20.3	20.7							
	4H	19.3	20.0	19.8	20.4	20.9	19.3	20.0	19.8	20.4	20.9							
	6H	19.5	20.1	20.0	20.5	21.0	19.5	20.1	20.0	20.5	21.0							
	8H	19.6	20.1	20.1	20.6	21.0	19.6	20.1	20.1	20.6	21.0							
	12H	19.6	20.0	20.1	20.5	21.0	19.6	20.0	20.1	20.5	21.0							
8H	4H	19.4	19.9	19.9	20.4	20.8	19.4	19.9	19.9	20.4	20.8							
	6H	19.6	20.1	20.1	20.5	21.1	19.6	20.1	20.1	20.5	21.1							
	8H	19.7	20.1	20.2	20.6	21.1	19.7	20.1	20.2	20.6	21.1							
	12H	19.7	20.0	20.3	20.5	21.1	19.7	20.0	20.3	20.5	21.1							
12H	4H	19.4	19.8	19.9	20.3	20.8	19.4	19.8	19.9	20.3	20.8							
	6H	19.7	20.0	20.2	20.5	21.0	19.7	20.0	20.2	20.5	21.0							
	8H	19.7	20.0	20.3	20.5	21.1	19.7	20.0	20.3	20.5	21.1							

Luminance table

Max. for $\gamma \geq 65^\circ$

Photometric dimensions in mm: D = 376

C-planes	0°
γ	Luminance in cd/m²
45°	12916.1
50°	10304.7
55°	9422.0
60°	9155.8
65°	8913.3
70°	8301.2
75°	7610.3
80°	6466.6
85°	4099.8

Photometric test report

Family
Highbay 31

Order number: 51HC41DA4MMB
EAN: 4058352700112

LP number
59122_4

Luminance values in cd/m²

γ 65° γ 70° γ 75° γ 80° γ 85°

s i t e c o

