


Photometric test report

Family
Apollon® 41

Order number: 51MH11W72322
EAN: 4058352396797

LP number
59038_1

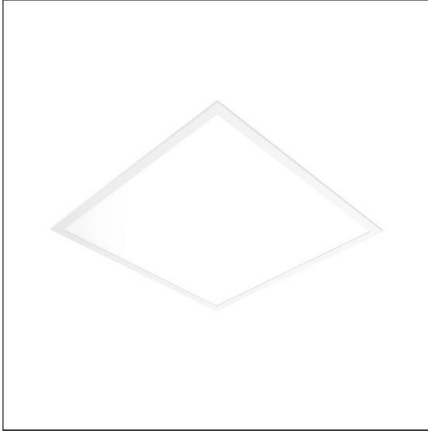

Version micro prismatic cover, wide distribution,
UGR≤19 (L65≤3000cd/m²)

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG

Rated values Net luminous flux = 3550 lm
Power consumption = 35.0 W
Luminous efficacy = 101.4 lm/W

serial
documentation
22.06.2020


sitEco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 479 cd/klm

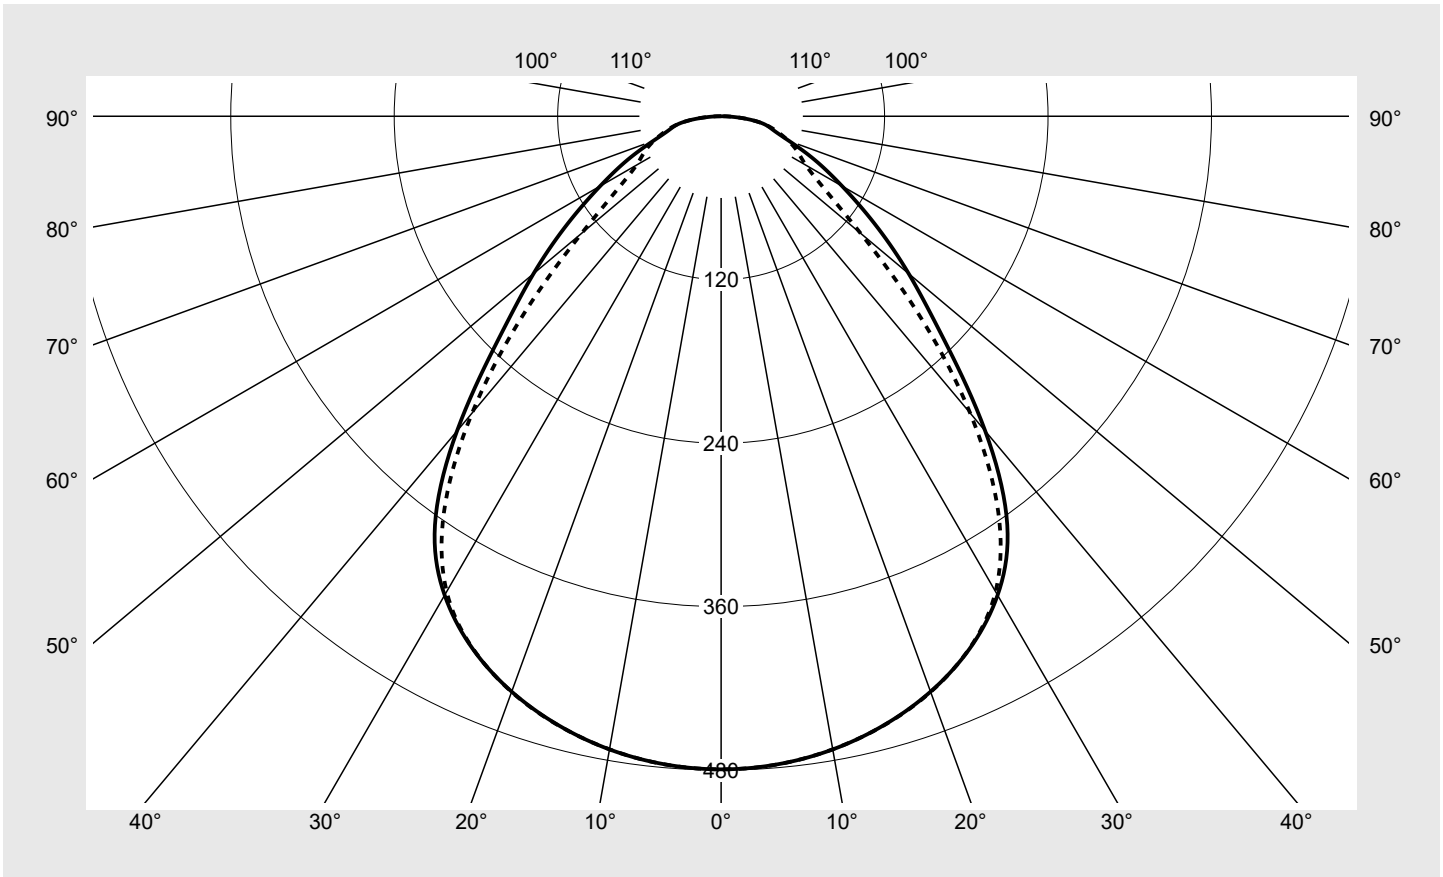

Classifications

DIN 5040 A 5 0
CIE N1=63 N2=87 N3=97
N4=100 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 100.0%
 ϕ_o 0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Apollon® 41	Order number: 51MH11W72322 EAN: 4058352396797	LP number 59038_1
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	479.5	479.5	479.5	479.5	479.5	479.5	479.5	2.9	2.9
5°	477.5	477.5	477.5	477.5	477.4	477.5	477.6	22.8	25.7
10°	472.0	472.0	471.9	471.9	471.8	471.9	471.9	44.9	70.6
15°	462.6	462.7	462.7	462.7	462.6	462.7	462.8	65.6	136.2
20°	449.5	449.7	449.8	449.7	449.5	449.6	449.7	84.3	220.5
25°	431.5	431.5	431.6	431.4	431.3	431.2	431.2	99.9	320.5
30°	406.0	405.2	404.5	404.7	404.8	403.9	403.0	110.9	431.4
35°	366.3	363.2	360.1	360.8	361.5	358.1	354.7	113.4	544.8
40°	301.6	296.4	291.3	292.5	293.7	289.0	284.4	103.1	647.9
45°	230.9	219.8	208.8	217.6	226.5	215.4	204.4	84.3	732.2
50°	179.8	157.7	135.5	157.1	178.6	156.1	133.5	65.9	798.1
55°	137.5	115.3	93.1	115.6	138.1	115.1	92.1	51.8	849.9
60°	102.5	86.5	70.4	86.2	102.0	86.9	71.8	41.1	891.0
65°	75.8	68.6	61.4	67.1	72.7	67.4	62.2	33.6	924.6
70°	53.2	53.2	53.2	52.8	52.4	52.4	52.4	27.2	951.8
75°	39.9	40.9	42.0	41.9	41.9	42.0	42.1	22.0	973.8
80°	31.3	30.7	30.2	31.0	31.8	31.5	31.3	16.8	990.6
85°	15.5	15.3	15.1	15.4	15.7	15.9	16.0	8.5	999.1
90°	1.3	1.4	1.4	1.7	1.9	2.0	2.1	0.9	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Apollon® 41	Order number: 51MH11W72322 EAN: 4058352396797	LP number 59038_1
------------------------------	--	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	14.7	16.3	15.1	16.6	16.9	14.8	16.3	15.1	16.6	17.0
	3H	15.8	17.2	16.2	17.5	17.8	15.7	17.1	16.1	17.5	17.8
	4H	16.3	17.6	16.7	17.9	18.3	16.3	17.6	16.7	17.9	18.3
	6H	16.9	18.1	17.3	18.4	18.8	16.9	18.1	17.3	18.5	18.8
	8H	17.2	18.3	17.6	18.7	19.1	17.2	18.3	17.6	18.7	19.1
	12H	17.4	18.4	17.8	18.8	19.2	17.4	18.4	17.8	18.8	19.2
4H	2H	15.2	16.4	15.6	16.8	17.2	15.2	16.5	15.6	16.8	17.2
	3H	16.4	17.5	16.9	17.9	18.3	16.4	17.5	16.8	17.9	18.3
	4H	17.1	18.1	17.6	18.5	18.9	17.1	18.1	17.6	18.5	18.9
	6H	17.9	18.7	18.3	19.2	19.6	17.9	18.8	18.4	19.2	19.7
	8H	18.2	19.0	18.7	19.4	19.9	18.3	19.0	18.7	19.5	20.0
	12H	18.5	19.2	19.0	19.6	20.1	18.6	19.2	19.0	19.7	20.2
8H	4H	17.5	18.2	17.9	18.7	19.1	17.5	18.2	17.9	18.7	19.1
	6H	18.4	19.0	18.9	19.5	20.0	18.4	19.1	18.9	19.6	20.1
	8H	18.8	19.4	19.3	19.9	20.4	18.9	19.5	19.4	20.0	20.5
	12H	19.2	19.7	19.7	20.2	20.7	19.3	19.8	19.8	20.3	20.8
12H	4H	17.5	18.2	18.0	18.7	19.2	17.5	18.2	18.0	18.7	19.2
	6H	18.5	19.1	19.0	19.5	20.1	18.6	19.1	19.1	19.6	20.1
	8H	19.0	19.5	19.5	20.0	20.5	19.1	19.5	19.6	20.0	20.6

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 555	B = 555
------------------------	---	--------------------------------------	----------------	----------------

C-planes	γ	Luminance in cd/m ²								
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°		
45°	45°	3763.2	3583.0	3402.5	3546.9	3691.4	3511.2	3331.1		
50°	50°	3223.8	2827.0	2430.4	2816.4	3202.6	2798.6	2394.5		
55°	55°	2763.6	2316.8	1869.9	2322.6	2775.3	2312.9	1850.6		
60°	60°	2363.6	1993.4	1623.2	1986.7	2350.2	2002.8	1655.5		
65°	65°	2067.9	1871.6	1675.0	1828.8	1982.6	1839.1	1695.4		
70°	70°	1793.0	1792.0	1791.0	1777.5	1764.4	1765.0	1766.1		
75°	75°	1776.3	1822.6	1868.5	1867.6	1866.2	1869.8	1872.9		
80°	80°	2076.7	2038.9	2001.1	2054.8	2107.9	2091.3	2074.7		
85°	85°	2047.0	2023.2	1999.4	2036.4	2073.4	2097.2	2121.0		

Photometric test report

Family
Apollon® 41

Order number: 51MH11W72322
EAN: 4058352396797

LP number
59038_1

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

