




Photometric test report

Family Licross® Protected	Order number: 51TS12CN475FD EAN: 4058352418581	LP number 58522_41
	Version prismatic cover, frosted, wide distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-Multilumen CLOi Setting DC mode (central or group accumulator) initial emergency light level	serial documentation 26.08.2020
	Rated values Net luminous flux = 3110 lm Power consumption = 17.7 W Luminous efficacy = 175.7 lm/W	

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 420 cd/klm**

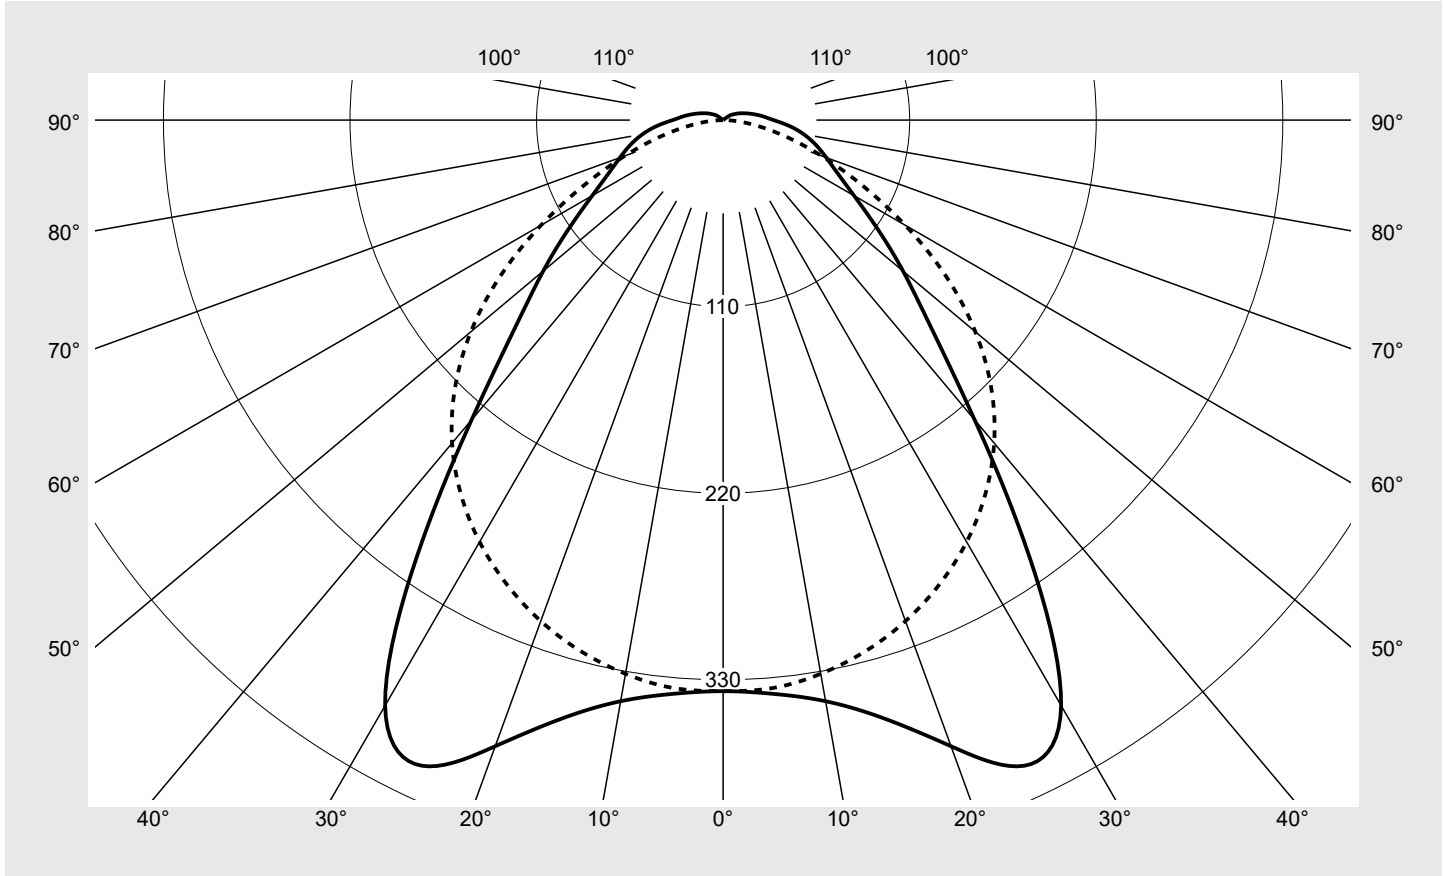

Classifications	
DIN 5040	A 4 1
CIE	N1=54 N2=82 N3=95 N4=97 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	96.8%
ϕ_o	3.2%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® Protected	Order number: 51TS12CN475FD EAN: 4058352418581	LP number 58522_41
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	336.7	336.7	336.7	336.7	336.7	336.7	336.7	2.0	2.0
5°	339.6	338.6	335.9	336.3	336.9	336.0	336.1	16.1	18.1
10°	347.9	347.0	341.3	338.0	335.2	332.1	331.5	32.3	50.4
15°	365.1	363.4	352.6	343.0	333.9	326.3	324.2	48.8	99.2
20°	392.9	389.6	370.2	350.5	332.5	318.7	314.4	66.1	165.3
25°	420.1	417.2	393.2	361.7	330.8	309.3	301.9	83.9	249.2
30°	398.6	403.0	395.6	369.9	329.0	297.6	287.2	97.7	346.8
35°	315.4	327.2	346.9	353.5	322.7	283.2	269.5	100.9	447.7
40°	230.7	242.3	270.7	302.4	300.6	265.5	248.6	95.2	542.9
45°	173.9	182.1	205.6	239.8	258.3	240.0	223.6	85.6	628.5
50°	138.5	144.5	161.6	188.3	208.7	204.6	194.1	75.2	703.7
55°	110.6	115.5	130.2	150.3	164.6	163.9	160.4	64.4	768.0
60°	89.1	92.4	103.6	120.9	128.5	124.9	123.9	53.5	821.6
65°	74.6	76.3	82.5	95.4	99.4	91.8	89.8	43.7	865.3
70°	64.8	65.1	66.4	73.4	75.2	65.0	61.7	35.1	900.3
75°	56.7	56.1	54.1	55.3	54.0	43.4	39.3	27.4	927.8
80°	48.3	47.2	43.9	40.6	36.4	26.8	21.9	20.7	948.5
85°	39.1	38.0	34.5	29.4	22.9	14.4	9.1	14.9	963.3
90°	29.8	28.8	25.7	20.2	13.1	5.8	0.8	9.9	973.3
95°	24.0	23.5	21.4	16.6	9.9	3.5	0.7	7.9	981.2
100°	19.2	18.8	17.3	13.3	7.4	1.9	0.6	6.2	987.4
105°	15.1	14.8	13.6	10.2	5.0	0.8	0.6	4.6	992.0
110°	11.8	11.3	10.2	7.3	2.9	0.6	0.6	3.3	995.3
115°	9.0	8.5	7.3	4.7	1.4	0.7	0.7	2.3	997.6
120°	6.6	6.1	4.9	2.7	0.8	0.7	0.7	1.5	999.1
125°	4.4	4.0	2.9	1.3	0.7	0.8	0.8	0.9	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® Protected	Order number: 51TS12CN475FD EAN: 4058352418581	LP number 58522_41
-------------------------------------	---	------------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	17.1	18.8	17.5	19.1	19.4	19.0	20.6	19.3	20.9	21.3
	3H	18.3	19.8	18.7	20.1	20.4	20.0	21.5	20.4	21.8	22.2
	4H	19.0	20.4	19.4	20.7	21.1	20.4	21.7	20.8	22.1	22.5
	6H	19.7	21.0	20.1	21.4	21.8	20.6	21.9	21.0	22.3	22.6
	8H	20.1	21.3	20.6	21.7	22.1	20.7	21.9	21.1	22.3	22.7
	12H	20.5	21.7	21.0	22.1	22.5	20.8	21.9	21.2	22.3	22.7
4H	2H	18.0	19.3	18.4	19.7	20.1	19.4	20.8	19.8	21.2	21.5
	3H	19.3	20.5	19.7	20.9	21.3	20.7	21.9	21.1	22.3	22.7
	4H	20.1	21.2	20.6	21.6	22.0	21.2	22.3	21.6	22.7	23.1
	6H	21.0	22.0	21.5	22.4	22.8	21.6	22.5	22.0	22.9	23.4
	8H	21.5	22.3	22.0	22.8	23.3	21.7	22.5	22.2	23.0	23.5
	12H	22.0	22.7	22.5	23.2	23.7	21.8	22.5	22.3	23.0	23.5
8H	4H	20.5	21.4	21.0	21.8	22.3	21.5	22.3	21.9	22.8	23.3
	6H	21.6	22.3	22.1	22.8	23.3	22.0	22.7	22.5	23.2	23.7
	8H	22.2	22.8	22.7	23.3	23.8	22.2	22.9	22.7	23.3	23.8
	12H	22.8	23.4	23.4	23.9	24.4	22.4	22.9	22.9	23.4	24.0
12H	4H	20.6	21.4	21.1	21.8	22.3	21.5	22.3	22.0	22.8	23.3
	6H	21.7	22.4	22.2	22.8	23.4	22.1	22.7	22.6	23.2	23.8
	8H	22.4	22.9	22.9	23.4	24.0	22.4	22.9	22.9	23.4	24.0

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1480	H(C0) = 13	H(C180) = 13
			B = 78	H(C90) = 0	H(C270) = 0

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°		5678.1	5976.3	6844.8	8172.9	9082.4	8764.9	8519.7	
50°		4842.1	5080.2	5779.5	6920.6	7956.3	8157.6	8136.0	
55°		4194.6	4410.4	5071.6	6042.7	6910.0	7251.4	7532.4	
60°		3726.7	3893.4	4465.6	5408.6	6050.5	6261.1	6678.1	
65°		3504.9	3617.0	4015.4	4856.4	5377.5	5358.2	5726.0	
70°		3498.7	3557.7	3747.0	4368.8	4819.1	4579.1	4859.8	
75°		3635.8	3650.9	3659.7	3994.5	4291.2	3889.3	4088.7	
80°		3850.7	3830.7	3746.9	3772.9	3833.1	3342.4	3391.9	
85°		4157.0	4134.5	4021.7	3873.7	3629.6	2972.7	2819.7	

Photometric test report

Family Licross® Protected	Order number: 51TS12CN475FD EAN: 4058352418581	LP number 58522_41
--	---	-------------------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

