

Photometric test report

Family
LANTERN CLASSIC LED

Order number: **5XA5245BF14H**
EAN: **4058352834459**

LP number
57125_30

serial
documentation
08.07.2022

siteco



Version	post-top- or mounting to wall arm
Optic	asymmetric, extremely wide distribution (P1.0a)
Cover	cover transparent, PMMA
Lamps	LED 2200 K CRI ≥ 70
Controlgear	ECG SITECO iQ
Rated values	Net luminous flux = 1360 lm Power consumption = 12.9 W Luminous efficacy = 105.4 lm/W

Luminous intensity in cd/klm


C180-0

C195-15

C200-20

C270-90

Imax: 880 cd/klm

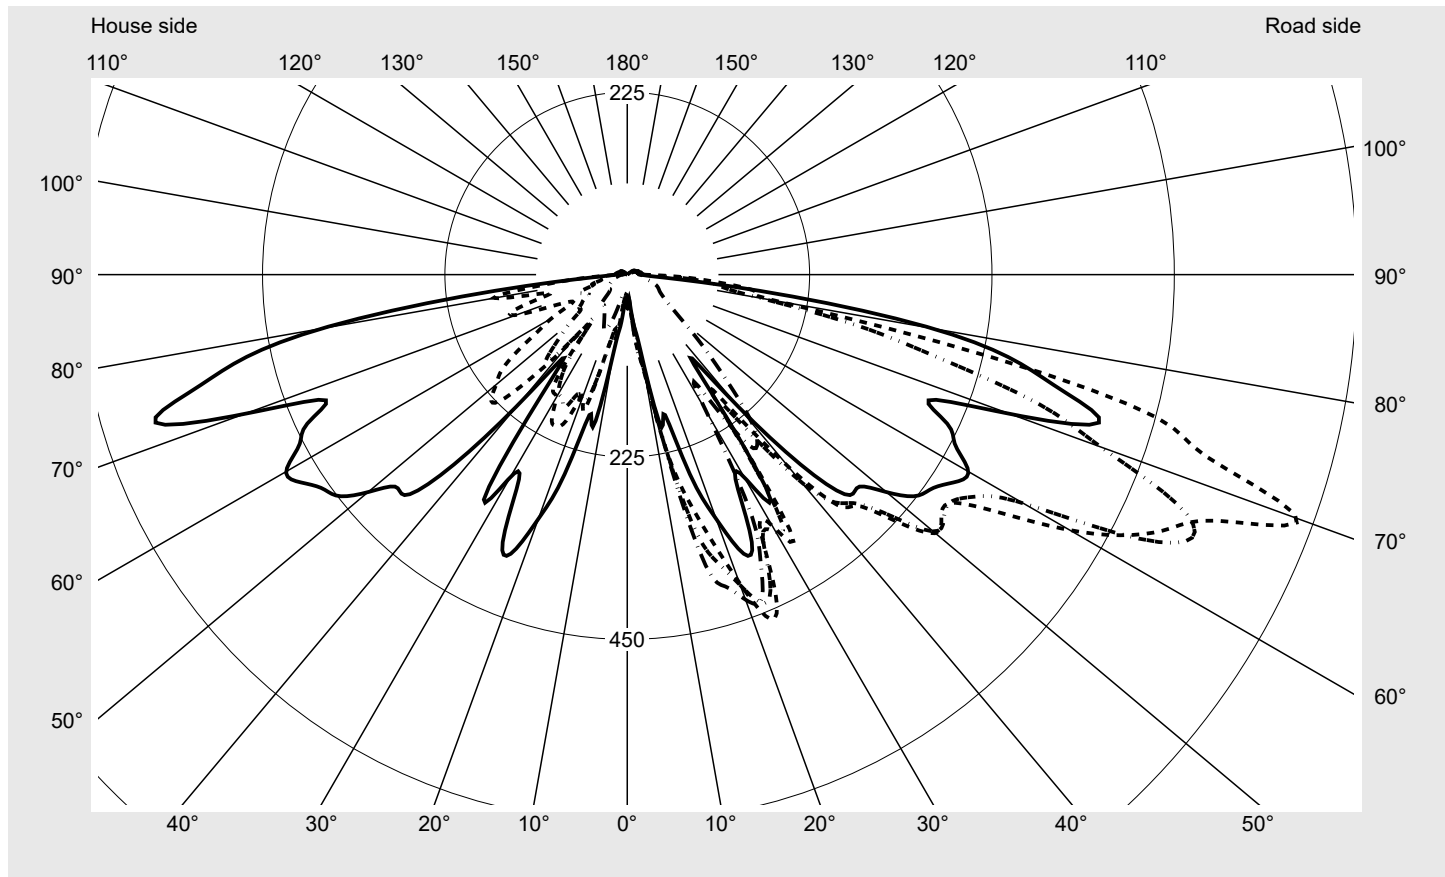

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	95.8%
Eta 90° - 180°	4.2%

Measurement conditions

DIN EN 13032 and DIN 5032


Luminous intensity class acc. to EN13201-2

Class:	---
Imax 70°	880.4
Imax 80°	382.4
Imax 90°	17.9
Imax >90°	17.5
Imax >95°	17.5

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245BF14H EAN: 4058352834459	LP number 57125_30
---	--	-------------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

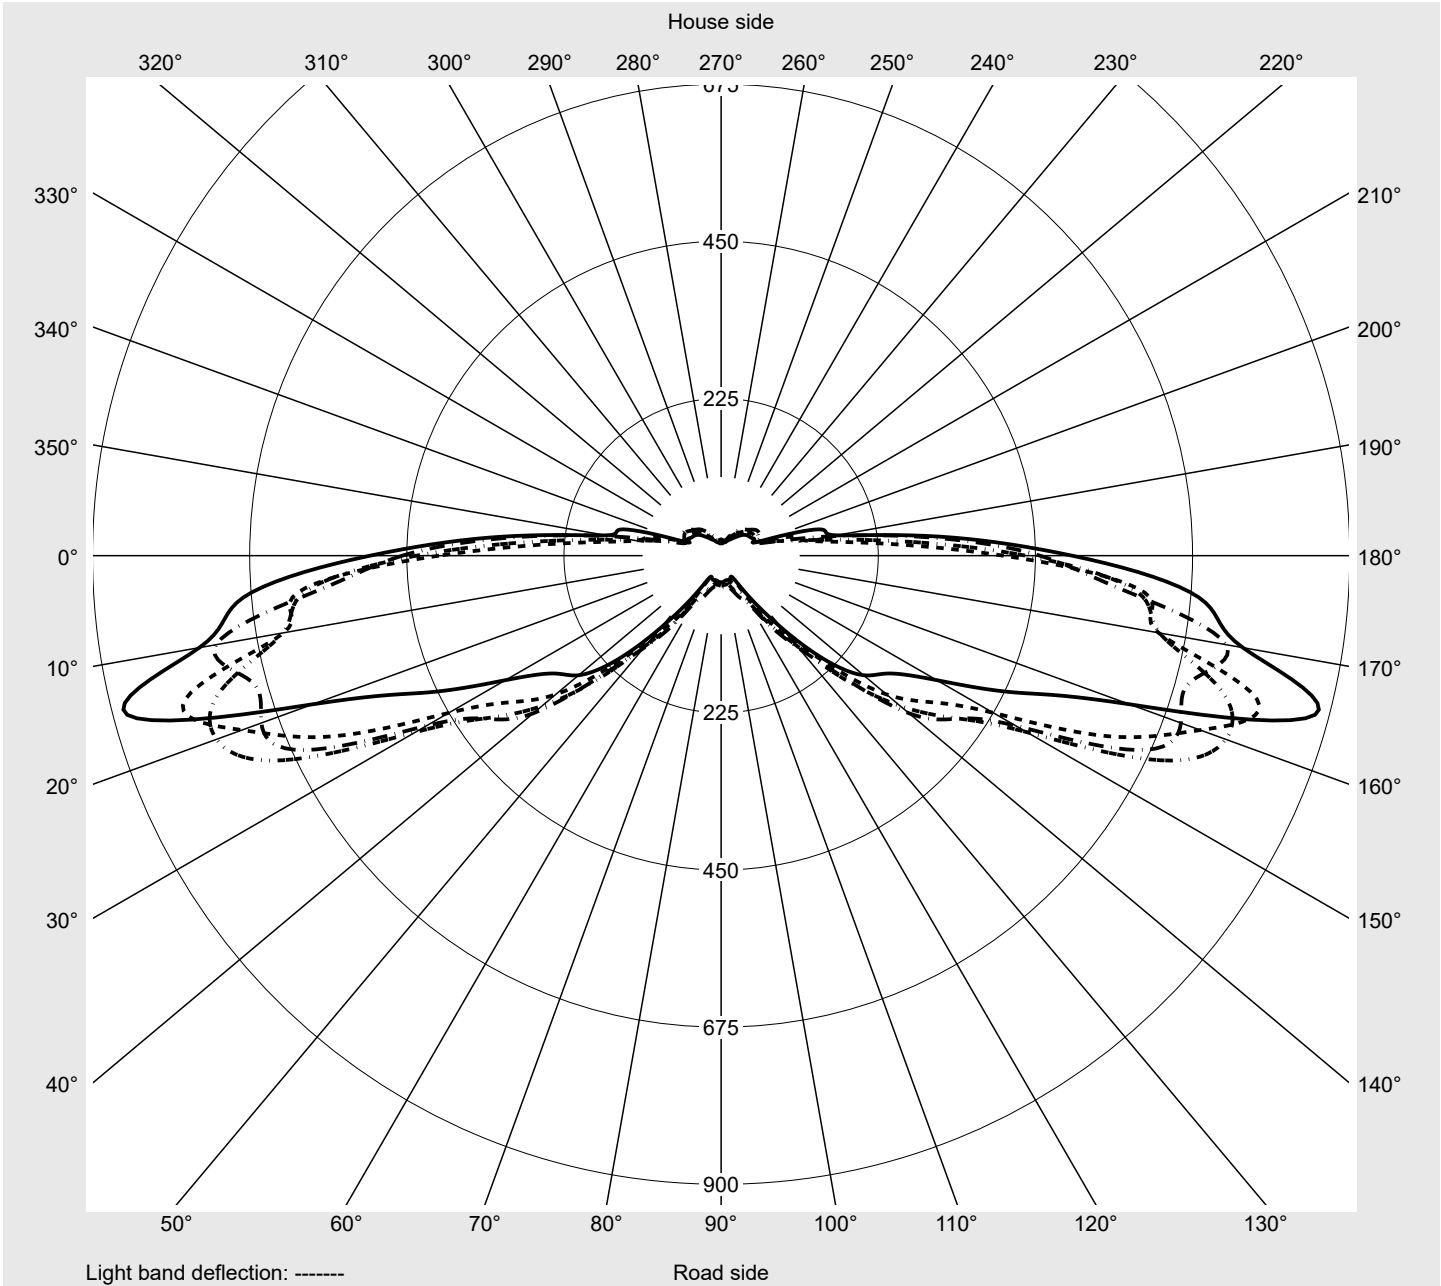

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245BF14H EAN: 4058352834459	LP number 57125_30
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0
2,5°	33.6	33.6	33.6	33.9	34.3	35.0	36.1	37.2	39.0	40.9	42.3	43.8	44.5
5,0°	33.9	34.7	34.7	35.0	36.1	37.9	39.4	40.1	40.9	41.6	41.6	41.2	41.2
7,5°	63.9	73.3	82.5	89.4	94.5	100.7	104.3	106.2	108.4	111.3	103.3	95.2	85.4
10,0°	98.1	102.5	109.1	125.5	120.8	125.5	130.3	135.7	141.9	145.9	157.3	160.5	160.9
12,5°	190.5	191.2	204.0	220.4	220.0	222.9	225.8	231.7	232.0	228.8	220.7	217.8	223.3
15,0°	178.4	218.9	253.9	285.7	329.1	325.8	341.1	307.6	314.9	333.8	323.3	313.0	292.6
17,5°	260.9	307.2	338.6	341.1	373.2	401.7	381.3	367.4	370.3	379.1	398.8	390.4	387.1
20,0°	320.7	332.8	365.6	404.6	407.9	421.8	432.7	435.6	409.0	413.4	441.1	410.8	399.2
22,5°	371.4	406.1	436.0	459.7	438.9	424.0	416.7	406.5	411.9	417.0	432.0	395.5	388.2
25,0°	363.4	383.8	412.7	432.4	416.7	399.5	375.4	355.7	342.2	356.1	385.3	351.0	346.3
27,5°	293.0	322.2	350.3	355.7	361.9	359.0	352.5	323.3	306.1	309.4	329.5	295.5	289.0
30,0°	288.6	314.1	341.5	357.6	366.3	365.6	364.1	340.8	310.1	306.1	308.7	280.9	240.8
32,5°	329.5	355.0	377.6	373.6	341.9	301.4	278.4	263.8	246.6	255.0	263.8	260.5	245.2
35,0°	204.7	187.9	200.7	197.0	201.4	201.8	205.4	211.3	215.6	223.3	236.8	222.9	214.2
37,5°	128.8	145.9	186.4	203.2	235.3	263.8	273.6	258.3	252.1	256.5	240.1	207.2	198.1
40,0°	210.2	256.9	293.7	310.1	334.6	340.0	326.2	314.1	296.6	283.1	255.0	220.0	197.4
42,5°	321.4	360.8	372.9	386.7	381.6	366.3	347.7	339.0	315.2	291.5	263.8	214.5	186.4
45,0°	384.6	400.6	400.6	403.5	399.2	393.7	366.0	351.7	339.0	304.3	263.4	208.7	174.0
47,5°	387.5	422.5	440.0	451.0	440.0	427.6	401.3	364.1	335.3	287.5	239.3	198.1	156.2
50,0°	417.4	456.8	485.6	496.2	492.9	471.8	430.5	376.9	331.3	265.6	206.1	174.4	138.6
52,5°	448.8	491.5	485.6	488.5	492.6	491.1	448.8	384.2	328.0	248.5	185.3	159.4	116.8
55,0°	459.7	501.7	515.5	490.7	488.2	492.2	451.7	386.4	321.1	241.5	178.1	144.1	105.4
57,5°	477.2	533.1	613.7	547.7	509.7	501.7	450.6	394.0	331.3	241.2	173.7	133.5	89.0
60,0°	486.0	576.5	706.0	630.5	564.1	563.3	459.4	402.8	339.3	246.3	186.4	130.6	89.4
62,5°	456.4	581.6	734.1	696.1	700.5	658.6	487.1	407.5	351.0	244.1	172.9	123.0	79.9
65,0°	436.0	598.4	637.4	740.3	768.8	693.2	505.3	404.6	334.9	251.0	168.2	117.5	69.3
67,5°	403.9	608.9	635.9	794.3	730.1	611.9	450.2	365.6	309.0	225.8	152.9	106.2	49.6
70,0°	502.4	686.7	758.5	880.4	622.1	463.4	356.5	294.1	266.3	211.6	135.7	78.1	42.3
72,5°	609.3	779.7	847.2	751.6	534.9	361.6	262.3	197.8	206.1	189.0	126.2	69.3	37.2
75,0°	557.9	573.6	727.2	671.0	400.2	251.0	175.5	145.2	134.6	116.8	83.6	54.4	29.6
77,5°	490.0	424.3	509.7	429.1	292.6	177.0	137.6	128.1	98.5	70.8	46.0	29.6	22.3
80,0°	382.4	309.8	214.5	185.3	166.7	120.4	103.6	79.2	51.8	37.9	33.9	24.4	20.1
82,5°	202.1	172.2	128.4	159.8	118.9	90.9	78.1	58.7	30.3	23.0	20.8	19.7	18.2
85,0°	57.3	53.6	82.8	115.3	96.0	62.0	48.5	38.3	24.4	20.1	18.2	17.5	17.1
87,5°	22.6	35.4	58.4	67.1	48.9	34.7	29.6	24.1	19.3	17.5	17.1	16.8	16.1
90,0°	15.0	15.7	16.8	17.5	17.9	17.9	17.9	17.5	17.5	17.1	16.8	16.1	15.3
92,5°	14.6	15.7	16.4	16.8	17.5	17.5	17.5	17.1	16.8	16.8	16.4	16.1	15.3
95,0°	13.9	15.0	16.1	16.4	16.8	16.8	17.1	16.8	16.8	16.4	16.1	15.7	15.3
97,5°	13.5	14.2	15.0	15.7	16.1	16.4	16.4	16.4	16.1	16.1	16.1	15.7	15.3
100,0°	12.8	13.5	14.2	14.6	15.0	15.3	15.7	15.7	15.3	15.3	15.0	15.0	14.6
102,5°	12.0	12.4	13.1	13.9	14.6	14.6	15.0	14.6	14.6	14.6	14.6	14.2	14.2
105,0°	11.3	12.0	12.8	13.1	13.5	13.9	13.9	13.9	13.9	13.9	13.9	13.9	13.9
107,5°	10.6	11.3	11.7	12.4	12.8	13.1	13.1	13.1	13.1	13.1	13.1	13.1	13.1
110,0°	9.9	10.6	11.3	11.7	12.0	12.4	12.8	12.8	12.4	12.4	12.4	12.4	12.4
112,5°	9.5	10.2	10.6	11.3	11.7	12.0	12.4	12.0	11.7	12.0	11.7	12.4	12.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245BF14H EAN: 4058352834459	LP number 57125_30
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0
2,5°	44.9	45.6	45.6	46.3	46.3	46.0	32.8	32.8	32.5	32.1	31.7	31.7	31.4
5,0°	41.6	40.9	40.1	40.9	42.3	43.1	33.2	32.8	32.8	32.8	32.5	31.7	31.4
7,5°	78.8	75.5	75.2	73.7	67.5	66.4	55.1	47.4	41.6	36.9	33.6	31.7	30.3
10,0°	147.8	125.9	123.7	131.0	127.7	114.6	86.8	86.8	77.7	73.3	75.2	68.6	59.8
12,5°	219.3	202.5	192.6	214.9	231.3	226.2	152.9	118.9	82.5	68.6	66.0	60.2	64.2
15,0°	290.4	261.6	278.8	329.5	367.4	368.5	136.8	108.7	98.9	105.1	114.9	132.1	125.5
17,5°	378.4	321.8	312.0	371.8	402.1	403.5	205.1	141.2	174.4	161.3	145.2	140.8	124.1
20,0°	393.3	336.4	325.1	391.5	424.7	426.9	223.3	177.3	158.3	170.8	149.2	133.9	131.3
22,5°	392.6	335.7	323.3	393.0	432.0	433.5	259.0	197.0	193.0	159.4	159.8	151.8	136.5
25,0°	355.0	304.3	300.3	357.2	387.5	388.9	243.4	181.7	206.1	180.2	152.5	156.5	139.0
27,5°	288.6	243.4	253.2	302.1	325.1	326.9	185.7	156.9	201.8	172.9	156.2	144.8	128.8
30,0°	228.0	187.5	194.1	205.4	198.8	194.8	163.5	135.7	175.5	168.9	140.8	131.3	115.7
32,5°	208.7	145.2	161.6	179.5	167.8	162.7	193.4	138.6	170.8	152.1	143.8	109.5	84.6
35,0°	180.2	137.6	186.4	239.7	247.7	248.8	118.9	129.5	136.1	119.3	119.3	71.1	46.7
37,5°	177.3	147.8	215.3	257.2	262.3	263.4	98.5	76.3	73.0	68.6	55.5	39.4	36.1
40,0°	189.7	169.3	222.2	244.1	240.4	240.1	157.3	96.3	110.2	100.7	77.7	52.9	54.7
42,5°	174.4	162.7	203.6	205.4	197.8	192.6	181.3	134.6	164.6	145.2	73.7	58.7	68.6
45,0°	154.7	151.8	176.2	165.6	154.7	150.3	216.7	152.9	218.6	133.2	63.9	62.8	72.6
47,5°	137.9	131.7	150.3	133.5	123.0	117.5	213.1	145.9	227.7	110.6	52.9	68.2	73.7
50,0°	129.2	117.1	123.7	106.9	96.3	90.5	235.0	152.9	211.3	91.6	54.0	67.9	71.5
52,5°	113.1	101.4	102.2	86.5	77.4	73.0	262.0	160.2	196.7	73.0	59.5	67.1	68.2
55,0°	102.2	87.9	84.6	72.6	64.2	61.3	266.7	162.4	167.1	72.2	64.2	66.4	65.3
57,5°	90.1	75.9	69.3	59.1	54.0	54.0	278.8	175.9	131.3	66.8	67.5	63.9	64.2
60,0°	76.3	61.7	56.2	49.3	48.5	48.9	343.3	155.8	108.0	62.0	65.7	63.9	63.1
62,5°	67.5	56.2	47.8	44.5	44.5	45.2	299.5	159.4	78.1	53.6	62.4	63.5	62.8
65,0°	51.8	51.1	43.4	42.0	42.3	43.1	243.7	128.1	79.9	59.1	58.0	60.6	59.8
67,5°	36.9	40.1	39.8	39.0	40.5	40.9	210.9	123.7	104.0	60.2	54.0	55.1	54.7
70,0°	33.2	36.1	36.1	36.1	37.6	37.9	313.0	167.5	145.6	62.8	52.2	50.7	48.5
72,5°	28.8	29.6	31.4	32.5	33.6	33.6	407.5	193.4	146.3	45.2	45.2	46.7	43.8
75,0°	24.8	26.6	27.7	28.5	28.8	28.5	414.1	178.1	108.7	44.5	40.9	41.2	39.4
77,5°	22.3	24.1	25.2	24.1	23.4	22.6	297.4	178.1	106.5	34.3	36.5	37.2	36.5
80,0°	20.4	21.5	21.5	21.2	21.2	20.4	147.0	188.6	166.7	31.7	33.2	34.3	33.6
82,5°	19.3	20.1	19.7	19.7	19.7	19.7	123.0	114.9	118.2	26.3	28.5	29.6	29.6
85,0°	17.5	18.6	18.6	18.2	18.6	19.0	87.9	46.0	64.2	28.5	25.5	27.0	25.9
87,5°	16.8	17.1	17.9	17.9	18.2	18.2	27.4	16.1	21.5	18.6	22.3	25.2	24.1
90,0°	16.1	16.8	17.1	17.5	17.5	17.5	13.5	13.1	12.8	12.0	11.3	10.9	10.6
92,5°	16.1	16.4	17.1	17.5	17.5	17.5	13.5	12.8	12.4	12.0	11.7	11.3	10.6
95,0°	16.1	16.4	16.8	17.1	17.5	17.5	13.1	12.8	12.4	11.7	11.3	11.3	10.2
97,5°	15.7	16.1	16.4	16.8	16.8	17.5	12.8	12.4	11.7	11.3	11.3	10.9	10.2
100,0°	15.0	15.3	15.3	15.7	16.4	16.8	11.7	11.7	10.9	10.9	10.9	10.2	10.2
102,5°	14.6	15.0	15.3	15.3	15.7	15.3	10.9	10.9	10.2	9.9	9.9	9.5	9.5
105,0°	13.9	14.6	14.6	14.6	15.0	14.6	10.6	10.2	9.5	9.5	9.5	9.1	8.8
107,5°	13.5	13.9	13.9	13.9	14.2	13.1	10.2	9.5	9.5	8.8	8.8	8.4	8.0
110,0°	13.1	13.1	13.1	13.5	13.9	13.1	9.5	8.8	8.8	8.0	8.0	8.0	8.0
112,5°	12.4	12.4	13.1	13.1	12.0	8.0	9.1	8.8	8.0	8.0	7.7	7.7	7.3

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245BF14H EAN: 4058352834459	LP number 57125_30
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	41.0	0.1	0.1
2,5°	31.4	31.0	30.3	30.3	29.6	29.2	28.5	27.4	26.3	25.5	25.5	0.4	0.5
5,0°	30.6	30.3	30.6	30.3	29.9	29.2	28.8	28.5	27.7	27.4	27.0	0.8	1.3
7,5°	29.9	30.3	29.6	29.2	28.8	29.2	28.8	28.5	28.1	28.1	27.7	2.2	3.5
10,0°	44.9	33.9	30.6	29.6	28.8	28.1	27.7	27.0	26.6	26.3	25.5	4.3	7.8
12,5°	73.7	75.5	74.1	62.4	51.1	41.2	33.9	28.8	27.7	27.4	27.0	8.4	16.3
15,0°	116.0	90.9	88.7	99.6	84.3	58.0	54.0	41.2	37.6	39.0	36.5	14.0	30.2
17,5°	117.5	109.1	112.7	98.1	87.6	70.8	67.5	53.3	47.8	54.4	54.7	19.7	50.0
20,0°	110.2	108.7	101.8	97.8	87.2	77.0	71.1	58.7	54.7	64.6	68.6	24.2	74.2
22,5°	116.0	112.0	107.6	93.0	86.1	75.5	75.2	66.0	59.8	69.7	73.7	28.1	102.3
25,0°	123.0	104.0	86.8	79.9	75.9	77.0	75.2	65.7	56.9	63.1	67.9	28.7	131.0
27,5°	114.2	90.5	73.7	71.9	74.8	73.7	72.2	59.1	50.4	56.6	61.3	27.2	158.2
30,0°	93.4	74.4	67.9	70.1	74.1	71.9	66.8	55.1	47.1	50.7	56.2	26.8	185.0
32,5°	73.3	80.3	75.5	71.1	69.0	64.9	60.2	54.0	43.1	48.9	52.5	26.6	211.5
35,0°	52.5	67.1	73.3	70.4	69.7	66.0	61.7	53.6	42.7	45.6	49.6	22.7	234.3
37,5°	35.8	41.2	52.5	62.8	67.9	66.0	62.4	53.3	41.6	44.5	47.4	23.4	257.7
40,0°	47.1	37.2	32.8	37.2	51.4	58.4	58.4	52.5	42.0	46.0	50.4	29.2	286.8
42,5°	62.0	52.5	40.5	34.3	35.0	39.0	45.2	46.7	38.7	42.3	44.5	33.3	320.1
45,0°	70.4	65.3	58.4	51.1	43.1	35.4	33.6	33.2	31.4	32.5	33.6	35.9	356.0
47,5°	72.2	69.3	64.2	54.0	47.4	44.5	35.8	28.8	28.1	28.5	29.2	37.4	393.4
50,0°	71.9	70.8	67.1	59.5	47.1	39.0	35.0	30.3	28.5	27.4	27.7	39.3	432.7
52,5°	69.7	69.7	66.8	60.6	51.1	40.9	33.2	27.4	25.5	26.6	29.2	40.2	472.9
55,0°	65.3	64.9	62.8	57.3	50.0	41.2	33.9	28.5	25.5	24.4	26.3	40.9	513.8
57,5°	62.4	60.2	58.4	53.3	45.6	39.0	32.1	27.7	25.5	24.1	24.8	42.8	556.6
60,0°	59.5	56.6	54.4	49.3	41.6	35.0	27.7	24.4	24.8	24.1	24.1	46.0	602.5
62,5°	58.0	52.5	49.3	44.1	38.3	32.8	26.3	22.3	22.3	22.6	23.4	48.2	650.7
65,0°	55.5	49.6	43.8	39.8	33.9	29.9	24.4	20.8	20.8	21.2	21.2	48.4	699.2
67,5°	51.4	46.7	41.2	35.4	30.6	26.6	22.6	20.1	19.7	19.7	19.7	46.8	745.9
70,0°	46.0	41.6	35.8	31.0	27.0	24.4	21.5	19.7	19.3	17.5	19.0	47.4	793.4
72,5°	40.5	38.3	32.5	28.1	24.4	21.5	19.0	18.2	17.9	17.1	16.8	46.0	839.4
75,0°	36.1	33.2	29.2	25.2	22.3	19.3	16.4	16.8	16.4	15.3	15.3	38.1	877.5
77,5°	33.9	31.0	27.4	24.1	20.8	17.1	15.0	14.2	14.2	13.5	13.1	29.2	906.7
80,0°	30.3	26.6	23.4	20.4	17.5	14.6	13.1	12.0	12.0	11.7	11.7	20.0	926.7
82,5°	26.6	23.4	19.7	18.2	16.1	13.5	11.7	11.3	10.6	10.2	10.2	14.1	940.8
85,0°	22.6	18.6	15.7	13.9	13.5	11.7	9.9	9.9	9.5	8.4	8.8	9.1	949.9
87,5°	19.7	15.7	13.1	11.7	10.6	9.5	8.4	8.4	8.0	7.3	7.3	5.9	955.8
90,0°	9.9	9.1	8.4	8.0	7.3	6.6	5.8	5.8	5.8	5.8	5.1	3.6	959.3
92,5°	9.9	9.5	8.8	8.0	7.3	6.6	6.6	6.2	5.8	5.8	5.8	3.6	962.9
95,0°	9.9	9.5	8.8	8.4	7.7	7.3	6.6	6.6	6.6	5.8	5.8	3.5	966.4
97,5°	9.5	9.5	8.8	8.4	7.7	7.3	6.6	6.6	6.6	6.6	6.6	3.4	969.9
100,0°	9.5	8.8	8.8	8.0	7.7	7.3	6.6	6.6	6.2	6.2	6.6	3.3	973.1
102,5°	8.8	8.4	8.0	7.3	7.3	6.6	6.2	5.8	5.8	5.5	5.8	3.0	976.2
105,0°	8.4	8.0	7.3	7.3	6.6	6.2	5.8	5.5	5.1	5.1	5.1	2.9	979.0
107,5°	8.0	7.3	6.9	6.6	5.8	5.8	5.1	5.1	4.7	4.4	4.4	2.6	981.7
110,0°	7.3	6.9	6.6	5.8	5.5	5.1	4.7	4.4	4.4	4.0	3.6	2.5	984.1
112,5°	6.9	6.6	5.8	5.8	5.1	5.1	4.4	4.4	4.0	3.6	2.9	2.3	986.4

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245BF14H EAN: 4058352834459	LP number 57125_30
---	--	-------------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	9.5	9.9	10.6	10.9	11.3	11.7	11.7	11.7	11.7	11.7	11.7	11.7	11.7
117,5°	9.1	9.5	9.9	10.2	10.6	11.3	11.3	10.9	10.9	10.9	10.9	11.7	11.7
120,0°	8.4	9.1	9.5	9.9	10.2	10.6	10.6	10.2	10.2	10.2	10.6	10.9	10.9
122,5°	8.4	9.1	9.1	9.5	9.9	9.9	10.2	10.2	9.9	10.2	10.2	10.6	10.6
125,0°	7.3	7.3	8.0	8.0	8.0	8.8	8.4	8.4	8.4	8.8	8.8	8.8	8.8
127,5°	5.1	5.5	5.8	5.8	5.8	5.8	5.8	5.8	5.8	5.8	5.8	5.8	6.6
130,0°	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4
132,5°	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	3.6	4.4
135,0°	3.3	3.3	3.6	3.6	3.6	3.6	3.6	3.3	3.6	3.3	3.6	3.6	3.6
137,5°	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
140,0°	2.9	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
142,5°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.1	1.5	1.1	1.1	1.1	1.5
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245BF14H EAN: 4058352834459	LP number 57125_30
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	11.7	12.4	12.4	12.4	10.2	5.1	8.8	8.4	8.0	7.7	7.7	7.3	7.3
117,5°	11.7	11.7	12.0	12.0	9.1	5.1	8.8	8.0	7.7	7.3	7.3	7.3	6.6
120,0°	10.9	11.3	11.7	11.7	8.0	3.6	8.4	7.7	7.3	6.6	6.9	6.6	6.6
122,5°	10.9	10.9	10.9	10.9	6.9	2.9	8.0	7.7	6.9	6.6	6.6	6.6	6.6
125,0°	8.8	9.5	9.5	8.8	5.8	2.9	6.6	6.6	5.8	5.8	5.8	5.5	5.1
127,5°	6.6	6.6	6.6	5.8	3.6	2.2	5.1	5.1	4.4	4.4	4.4	4.4	4.0
130,0°	4.4	4.4	4.4	4.4	2.9	2.2	4.4	4.0	3.6	3.6	3.6	3.6	3.6
132,5°	4.0	4.4	4.4	3.6	2.6	2.2	3.6	3.6	3.6	3.6	2.9	2.9	2.9
135,0°	3.6	3.6	3.6	2.9	2.2	1.5	2.9	2.9	2.9	2.9	2.9	2.9	2.6
137,5°	2.9	2.9	2.9	2.2	1.5	1.5	2.2	2.2	2.2	2.2	2.2	2.2	2.2
140,0°	2.2	2.2	2.2	1.5	1.5	0.7	1.8	1.8	1.5	1.8	1.5	1.5	1.5
142,5°	0.7	1.5	1.5	1.1	0.7	0.7	1.5	1.5	1.5	1.5	1.5	1.5	1.5
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	6.6	6.6	5.8	5.8	5.1	5.1	4.4	4.4	4.0	3.3	2.2	2.2	988.6
117,5°	6.6	6.2	5.8	5.5	5.1	4.7	4.4	4.4	3.6	2.9	2.2	2.0	990.6
120,0°	5.8	5.8	5.8	5.1	5.1	4.4	4.4	3.6	3.6	2.9	2.2	1.9	992.5
122,5°	5.8	5.8	5.1	5.1	5.1	4.4	4.4	3.6	3.6	2.6	2.2	1.8	994.3
125,0°	5.1	5.1	4.4	4.4	4.4	3.6	3.6	3.6	2.9	2.2	2.2	1.5	995.7
127,5°	3.6	3.6	3.6	3.6	3.3	2.9	2.9	2.9	2.2	2.2	1.5	1.0	996.8
130,0°	2.9	3.3	2.9	2.9	2.9	2.9	2.9	2.2	2.2	1.8	1.5	0.8	997.5
132,5°	2.9	2.9	2.9	2.9	2.9	2.9	2.6	2.2	2.2	1.5	1.5	0.7	998.2
135,0°	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	1.5	1.5	1.5	0.6	998.8
137,5°	2.2	2.2	2.2	2.2	2.2	1.8	1.5	1.5	1.5	1.5	1.5	0.4	999.2
140,0°	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	0.7	0.7	0.3	999.5
142,5°	1.5	1.5	1.5	1.5	1.1	1.1	1.1	0.7	0.7	0.7	0.7	0.2	999.7
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.1	999.8
147,5°	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family LANTERN CLASSIC LED	Order number: 5XA5245BF14H EAN: 4058352834459	LP number 57125_30
---	--	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1360	12.9	13.3	13.1
95	241	252	1290	12.2	12.6	12.4
90	229	250	1226	11.5	11.9	11.7
85	216	248	1157	10.7	11.1	10.9
80	203	246	1087	10.1	10.5	10.3
75	190	243	1017	9.4	9.8	9.6
70	178	241	953	8.9	9.1	9.0
65	165	238	883	8.2	8.4	8.3
60	152	235	814	7.6	7.8	7.7
55	140	232	750	7.0	7.2	7.1
50	127	229	680	6.4	6.6	6.5
45	114	225	610	5.8	6.0	5.9
40	102	221	546	5.3	5.4	5.4
35	89	216	477	4.8	4.9	4.8
30	76	210	407	4.3	4.3	4.3
25	63	203	337	3.7	3.8	3.8
24	60	201	321	3.5	3.7	3.6