


Photometric test report

Family LITEPOLE 2	Order number: 5XA5425AF14H + 5XA54000XS EAN: 4058352836477 + 4050737730073	LP number 59112_24
	Version post-top- or mounting to wall arm, spreader element, structured Optic asymmetric, wide distribution (ST1.2a) Cover cover transparent, PMMA Lamps LED 2200 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 1460 lm Power consumption = 12.9 W Luminous efficacy = 113.2 lm/W	serial documentation 08.07.2022
		

Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 590 cd/klm**

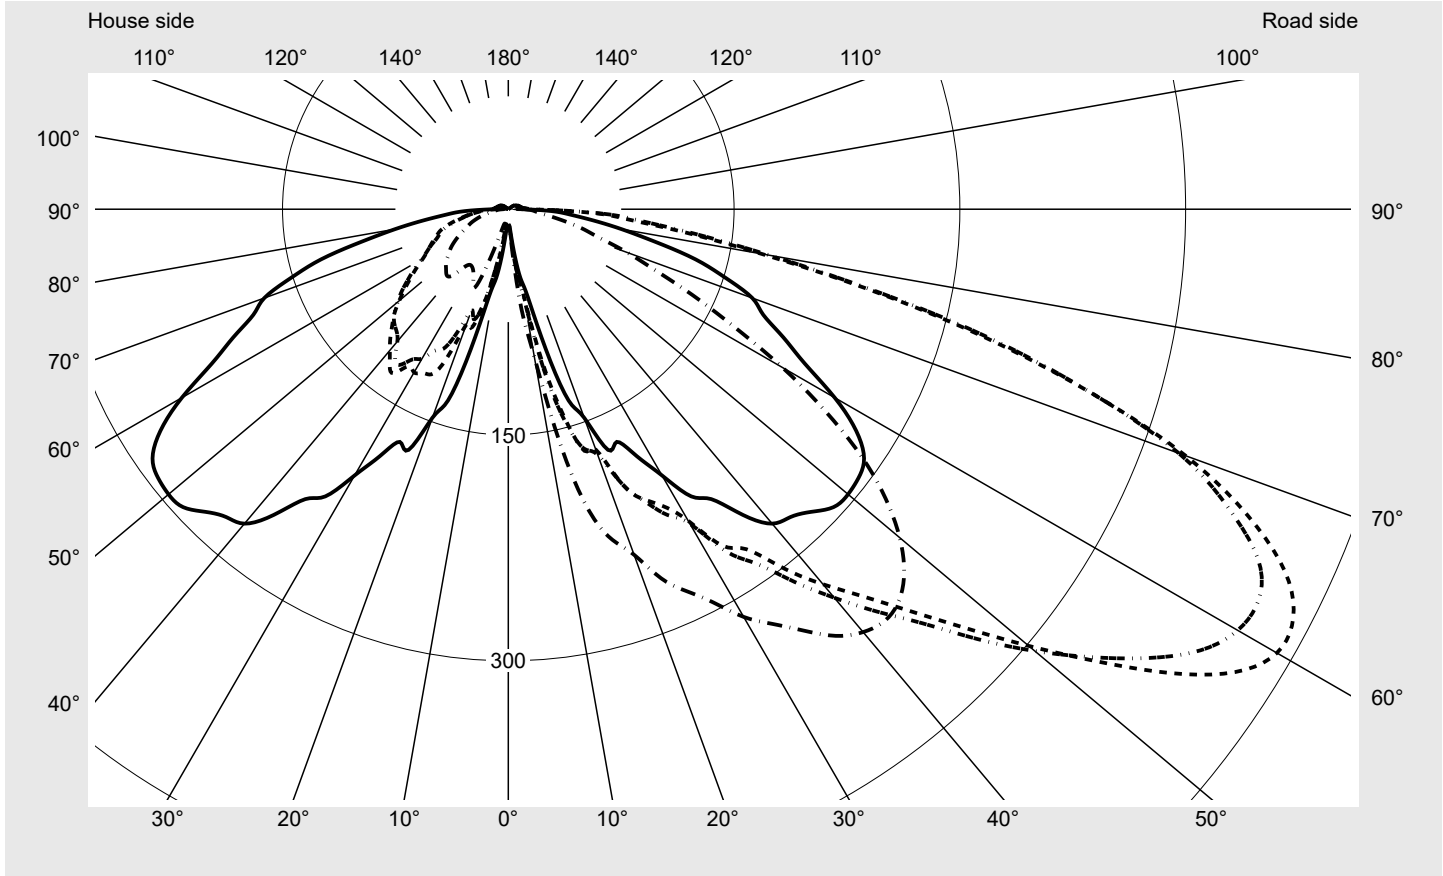

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	97.6%
Eta 90° - 180°	2.4%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	478.9
Imax 80°	176.1
Imax 90°	11.1
Imax >90°	10.6
Imax >95°	9.5


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425AF14H + 5XA54000XS EAN: 4058352836477 + 4050737730073	LP number 59112_24
------------------------------------	---------------------------------------------------------------------------------------------	-------------------------------------

Envelope curve in cd/klm **KMK 60°** **KMK 57.5°** **KMK 55°** **KMK 52.5°** **siteco**

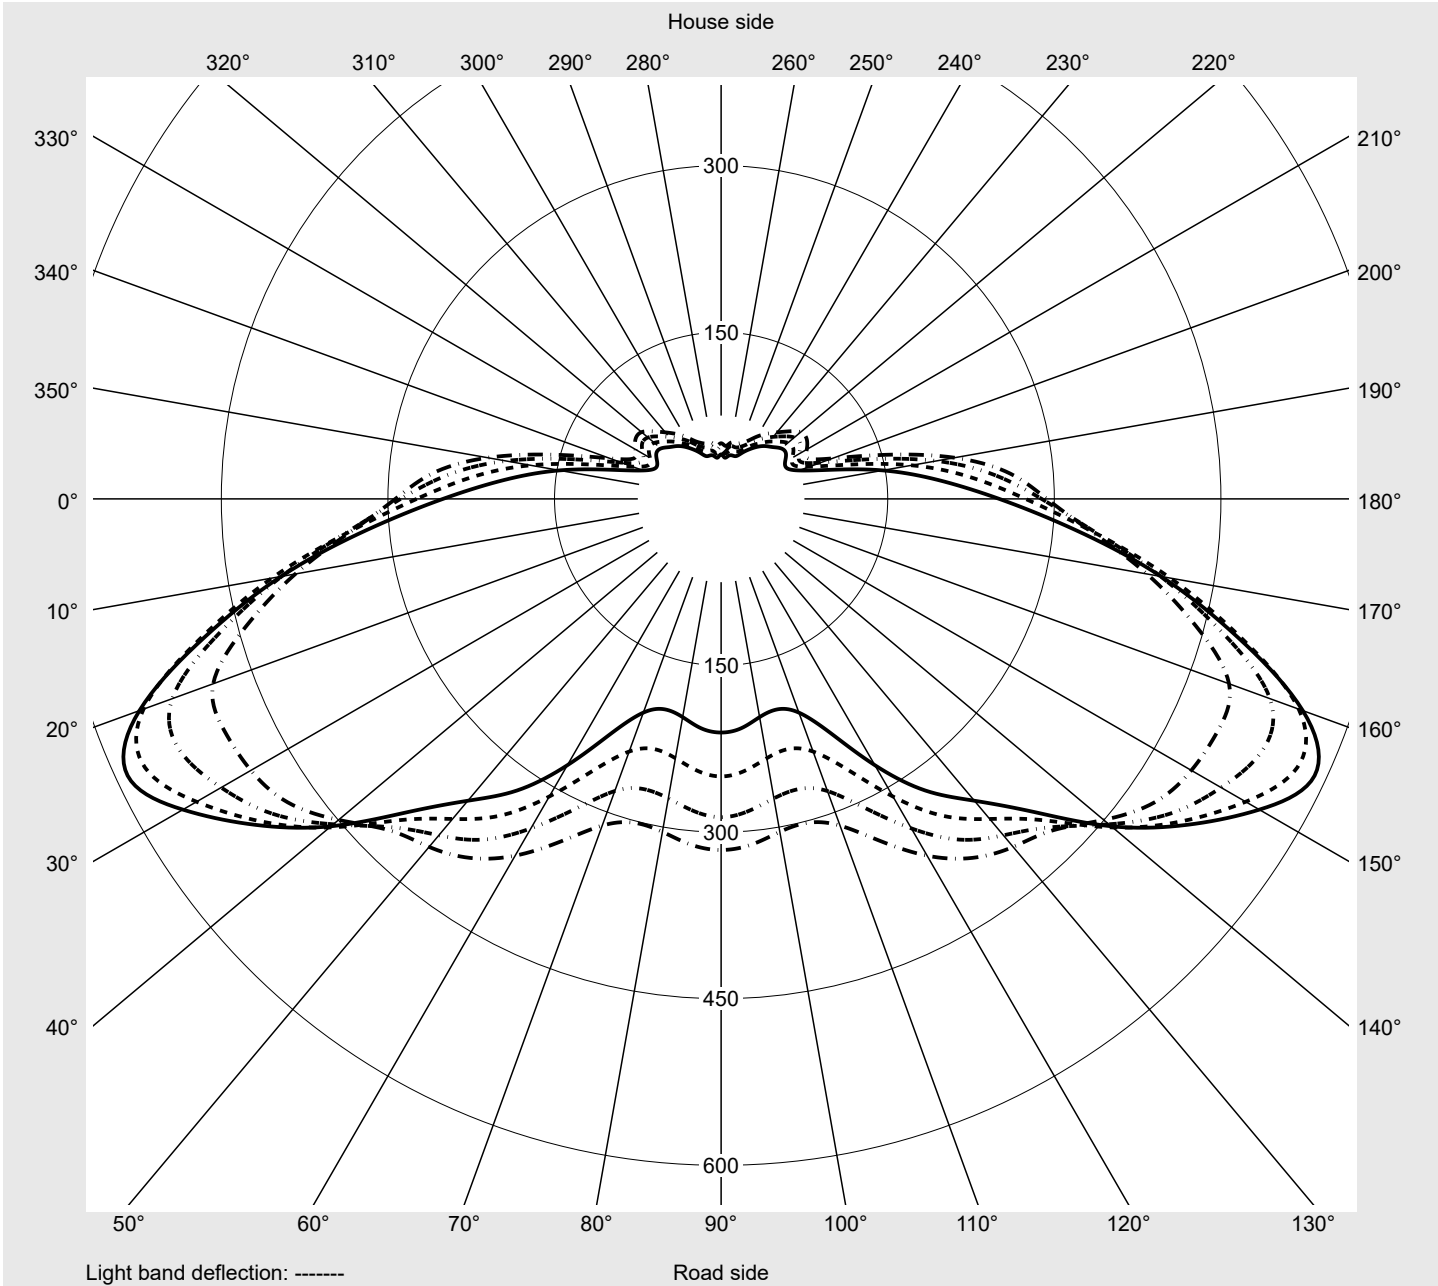

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425AF14H + 5XA54000XS EAN: 4058352836477 + 4050737730073	LP number 59112_24
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4
2,5°	11.1	11.1	11.1	11.1	11.1	11.1	11.4	11.4	11.4	12.0	12.0	12.0	12.0
5,0°	13.1	13.6	14.5	15.3	16.1	17.3	18.4	19.5	20.3	20.6	21.1	21.7	22.0
7,5°	28.1	30.1	32.3	35.1	37.0	39.0	39.8	40.9	42.9	45.1	47.6	49.5	53.4
10,0°	46.5	47.6	48.4	50.6	53.7	57.3	60.7	65.1	71.5	79.0	84.3	87.9	91.8
12,5°	59.5	64.6	70.7	83.2	95.2	103.5	109.4	115.8	118.8	122.4	123.8	126.3	126.3
15,0°	96.3	111.0	112.4	122.2	137.7	142.2	146.1	146.1	147.8	148.6	151.6	159.7	169.7
17,5°	133.3	146.9	158.3	164.4	169.2	168.3	166.7	165.0	164.2	168.9	173.1	180.6	184.8
20,0°	147.5	156.1	161.7	165.3	168.6	170.0	173.6	180.9	184.2	187.5	192.0	198.7	208.1
22,5°	173.1	185.3	188.4	195.9	199.2	197.6	197.6	201.2	197.8	200.3	203.7	217.6	221.8
25,0°	170.6	183.9	190.0	197.0	207.9	212.6	214.0	219.3	216.8	221.2	225.4	236.0	241.0
27,5°	185.0	198.1	199.8	205.6	214.5	222.3	229.0	237.1	243.2	249.0	249.3	260.4	272.1
30,0°	204.2	219.8	224.5	230.4	236.0	239.0	241.2	254.9	265.5	274.1	280.2	292.4	300.8
32,5°	226.2	241.8	244.6	251.3	262.4	265.2	269.6	281.0	289.7	302.5	310.5	318.6	324.2
35,0°	235.1	246.8	251.8	259.6	270.2	275.7	287.4	301.1	312.2	328.9	336.7	345.0	350.9
37,5°	256.0	269.9	273.8	284.7	296.1	300.8	311.9	327.8	340.3	354.2	362.3	370.1	376.2
40,0°	272.7	286.0	293.0	305.5	318.9	325.3	337.0	354.5	369.0	378.7	385.1	394.0	396.2
42,5°	277.4	291.3	304.4	323.3	339.2	348.9	362.6	376.2	389.0	398.7	404.6	409.0	404.0
45,0°	284.4	301.9	324.4	348.9	369.5	377.6	389.0	402.9	409.6	414.0	416.3	415.4	407.4
47,5°	293.0	317.2	349.8	381.5	404.9	411.8	422.7	431.3	428.8	422.1	419.9	416.0	405.4
50,0°	294.7	326.4	370.9	412.4	443.8	451.3	456.6	456.6	443.0	425.4	416.8	408.2	393.4
52,5°	293.3	334.2	389.3	442.7	486.7	493.6	488.9	476.4	449.7	422.1	409.0	394.6	370.9
55,0°	288.5	337.2	401.8	468.0	525.9	537.3	519.8	493.9	455.8	418.2	395.4	374.5	342.5
57,5°	274.1	335.3	410.7	485.3	553.4	572.4	545.4	506.1	460.2	409.0	376.2	348.4	309.4
60,0°	250.4	320.0	402.4	481.7	557.3	589.6	559.6	511.7	458.6	398.7	354.8	320.5	276.9
62,5°	222.0	298.0	384.3	462.5	541.8	587.9	562.1	506.7	448.0	381.8	330.3	289.9	242.1
65,0°	201.7	274.6	357.8	431.0	509.5	569.3	549.5	490.0	429.3	361.7	306.1	261.0	213.1
67,5°	183.4	258.2	333.6	396.0	467.5	531.7	517.5	456.3	396.5	333.1	278.8	231.8	182.0
70,0°	172.5	242.1	309.4	360.3	421.3	478.9	474.1	417.4	360.1	303.6	254.0	209.2	167.5
72,5°	151.1	217.6	272.7	313.3	358.9	406.2	406.5	360.9	306.6	257.9	219.0	186.4	136.9
75,0°	128.8	181.7	225.7	257.7	291.6	326.4	331.4	293.6	244.0	205.1	173.9	150.5	114.6
77,5°	99.9	141.1	173.9	197.6	220.9	244.0	247.6	219.0	181.4	150.3	136.9	126.9	110.7
80,0°	76.5	102.4	125.2	142.5	156.7	170.8	176.1	160.0	138.8	115.5	101.6	96.8	76.8
82,5°	56.8	74.0	88.8	101.0	109.9	119.1	124.9	119.4	106.8	87.6	73.2	68.2	51.8
85,0°	41.5	52.0	61.5	70.1	76.2	81.2	87.9	86.5	77.4	62.9	52.9	47.3	38.7
87,5°	28.9	36.7	42.9	49.3	53.1	55.9	59.8	59.3	53.4	45.1	39.2	35.9	30.9
90,0°	9.7	9.7	10.3	10.3	10.3	10.6	10.3	10.6	10.6	10.6	10.6	10.6	10.9
92,5°	9.2	9.5	9.5	9.7	9.7	9.7	10.0	10.0	10.0	10.0	10.0	10.0	10.0
95,0°	8.6	8.9	9.2	9.2	9.2	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5
97,5°	8.3	8.6	8.6	8.9	8.9	8.9	8.9	8.9	8.9	8.9	8.9	9.2	9.2
100,0°	7.8	7.8	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.9	8.9	8.9
102,5°	7.2	7.5	7.8	7.8	7.8	7.8	7.8	7.8	7.8	8.3	8.3	8.3	8.3
105,0°	7.2	7.2	7.2	7.2	7.2	7.8	7.8	7.8	7.8	7.8	7.8	7.8	7.8
107,5°	6.7	6.7	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.2	7.8	7.5	7.8
110,0°	6.1	6.7	6.7	6.7	6.7	6.7	6.7	7.2	7.2	7.2	7.2	7.2	7.2
112,5°	6.1	6.1	6.1	6.1	6.4	6.7	6.7	6.7	6.7	6.7	7.0	7.2	7.2

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425AF14H + 5XA54000XS EAN: 4058352836477 + 4050737730073	LP number 59112_24
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4
2,5°	12.0	12.0	12.0	12.0	12.0	11.7	11.1	11.1	11.1	11.1	11.1	11.1	11.1
5,0°	22.3	22.3	22.3	22.3	22.3	22.3	12.8	12.2	11.7	11.4	11.4	11.1	11.1
7,5°	57.6	59.8	61.2	62.9	65.1	66.8	24.5	20.6	17.3	15.0	13.6	12.5	12.0
10,0°	98.2	101.0	99.6	99.1	99.3	99.6	43.4	41.5	37.0	33.7	28.1	22.0	17.3
12,5°	130.8	138.3	146.1	152.2	157.8	160.3	57.6	65.4	52.6	47.6	47.0	44.8	40.3
15,0°	180.3	185.6	189.2	192.8	201.2	207.6	86.5	88.2	74.6	72.1	69.3	67.3	60.7
17,5°	191.7	206.2	218.1	224.8	229.3	230.4	109.4	102.7	88.5	88.5	82.6	76.5	62.6
20,0°	219.3	228.4	236.5	240.4	243.7	244.3	141.1	129.1	104.6	93.5	81.5	71.5	63.2
22,5°	232.1	238.2	247.9	257.7	264.3	265.5	161.7	156.9	136.9	128.6	107.7	88.5	69.6
25,0°	252.7	266.6	272.7	277.1	278.8	279.9	164.2	163.1	140.5	135.0	121.0	102.4	81.8
27,5°	283.0	289.9	292.2	294.4	293.8	294.4	173.4	165.6	140.5	133.6	122.7	106.0	85.7
30,0°	304.1	308.6	309.7	308.6	310.3	312.8	191.2	179.5	151.9	139.4	125.2	114.6	94.6
32,5°	329.4	330.6	328.3	328.9	328.3	326.7	207.9	190.9	158.3	141.1	123.5	118.3	104.3
35,0°	352.3	349.2	346.7	344.8	341.7	341.7	219.3	201.7	167.0	150.8	133.0	126.3	116.9
37,5°	372.3	365.3	357.3	352.3	354.2	357.3	237.9	214.5	175.0	152.8	129.4	123.5	119.9
40,0°	385.4	371.7	361.4	359.8	364.0	366.7	252.9	223.2	179.8	149.7	122.4	114.6	116.0
42,5°	390.1	374.8	363.4	363.1	367.8	370.6	257.7	223.4	178.4	144.7	116.0	109.9	112.7
45,0°	392.6	372.6	359.8	360.1	364.2	367.3	263.2	225.1	176.4	137.2	109.1	107.1	112.1
47,5°	385.7	361.2	347.8	348.6	353.9	356.7	270.2	227.9	174.2	128.6	102.7	102.7	108.5
50,0°	367.3	340.6	328.1	330.0	336.7	339.5	267.7	222.0	165.3	117.1	94.6	96.0	101.6
52,5°	340.0	313.0	301.9	304.4	312.5	316.1	261.3	213.4	153.3	106.6	86.5	89.0	94.0
55,0°	307.2	279.9	270.5	273.8	282.1	286.6	247.1	196.7	137.7	95.4	79.0	81.2	86.8
57,5°	268.8	242.1	233.2	237.1	245.7	249.9	225.1	174.2	119.1	84.9	72.1	74.0	79.3
60,0°	232.3	204.8	196.2	199.5	207.3	210.4	195.9	147.8	101.0	74.9	65.4	66.5	71.2
62,5°	195.9	168.3	159.2	161.7	168.3	169.2	168.6	124.4	86.8	67.9	60.7	60.9	64.8
65,0°	166.1	137.5	128.0	129.7	135.2	135.2	146.6	106.6	77.1	63.2	57.0	56.5	58.7
67,5°	139.4	110.7	101.0	101.3	103.2	105.2	129.9	93.2	70.4	59.3	53.7	51.8	52.9
70,0°	120.5	93.2	82.4	80.4	81.5	84.0	116.6	84.0	65.4	55.7	50.4	48.7	48.1
72,5°	96.3	71.8	61.5	59.0	60.7	64.0	103.0	74.9	60.1	52.0	47.3	45.6	44.0
75,0°	78.2	56.5	47.9	45.4	47.9	52.3	85.1	63.7	52.6	46.2	42.3	40.6	38.4
77,5°	63.2	44.5	36.7	34.8	37.0	40.6	69.0	52.6	45.1	39.5	36.5	34.8	32.3
80,0°	48.4	35.1	29.2	27.5	28.4	30.1	53.4	42.6	37.3	33.4	30.6	29.5	27.0
82,5°	37.6	28.4	23.7	22.3	22.5	22.8	42.0	34.8	30.6	27.5	25.9	24.8	22.5
85,0°	30.3	23.7	20.0	18.6	18.4	18.4	32.3	27.5	24.8	22.3	21.1	19.8	18.4
87,5°	25.3	20.6	17.8	16.1	15.6	15.6	24.2	21.1	19.5	17.5	16.1	15.0	13.6
90,0°	10.9	10.6	10.6	10.9	10.9	11.1	9.2	9.2	8.6	8.1	7.5	7.2	7.0
92,5°	10.0	10.0	10.0	10.6	10.6	10.0	8.6	8.6	8.1	7.5	7.2	7.0	6.4
95,0°	9.7	9.5	9.5	9.5	9.5	9.5	8.3	8.1	7.5	7.0	7.0	6.4	6.4
97,5°	9.2	8.9	9.2	9.5	9.2	8.9	8.1	7.8	7.2	7.0	6.4	6.4	5.8
100,0°	8.9	8.9	8.9	8.9	8.9	8.9	7.5	7.2	7.0	6.7	6.4	5.8	5.8
102,5°	8.3	8.3	8.3	8.3	8.3	8.3	7.2	7.0	6.7	6.1	6.1	5.6	5.6
105,0°	7.8	7.8	7.8	7.8	7.8	7.8	6.7	6.7	6.4	6.1	5.8	5.6	5.3
107,5°	7.8	7.8	7.8	7.8	7.8	7.2	6.7	6.1	6.1	5.8	5.6	5.3	5.0
110,0°	7.2	7.2	7.2	7.2	7.2	6.1	6.1	6.1	5.6	5.6	5.0	5.0	4.7
112,5°	7.2	7.2	7.2	7.2	6.7	3.9	6.1	5.6	5.6	5.3	5.0	4.7	4.5

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425AF14H + 5XA54000XS EAN: 4058352836477 + 4050737730073	LP number 59112_24
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.4	0.0	0.0
2,5°	11.4	11.4	11.4	11.4	11.4	11.4	11.4	11.1	11.4	11.1	11.1	0.1	0.2
5,0°	11.1	11.1	11.4	11.1	10.9	10.9	10.9	10.6	10.6	10.6	10.6	0.4	0.5
7,5°	11.7	11.1	10.9	10.9	10.9	10.9	10.6	10.6	10.3	10.3	10.0	1.1	1.6
10,0°	14.2	12.5	11.7	11.1	10.9	10.9	10.6	10.0	10.3	10.0	10.0	2.3	3.9
12,5°	31.4	21.4	16.1	13.6	11.4	10.9	10.3	10.0	10.0	9.7	10.0	4.3	8.2
15,0°	52.9	45.6	39.8	29.5	20.0	16.4	12.2	11.4	10.6	10.3	10.0	7.1	15.4
17,5°	53.7	50.1	48.1	45.4	41.2	36.5	28.7	22.3	17.3	15.3	15.0	9.9	25.2
20,0°	55.1	47.6	42.9	41.7	41.5	42.0	39.8	38.7	38.4	34.2	33.4	12.3	37.5
22,5°	56.2	47.0	43.1	40.6	40.9	39.8	42.3	43.4	48.4	54.3	54.5	15.4	52.9
25,0°	61.8	46.7	40.9	40.3	40.3	42.3	46.7	47.6	48.1	53.7	55.1	18.1	71.0
27,5°	65.4	49.3	42.9	42.6	42.3	46.2	51.2	54.0	48.1	51.8	50.1	21.1	92.1
30,0°	77.1	64.3	55.4	50.9	47.9	48.7	52.0	51.8	45.1	47.9	46.7	24.8	117.0
32,5°	90.2	79.3	66.8	59.3	55.9	55.1	54.0	50.1	44.2	45.4	45.1	28.9	145.9
35,0°	109.6	93.2	79.0	68.7	62.6	57.6	55.4	52.6	45.6	45.4	45.1	32.8	178.7
37,5°	115.5	102.7	90.2	80.1	72.1	65.7	58.7	56.2	50.6	49.0	49.0	37.2	215.9
40,0°	114.6	101.0	89.9	81.2	74.9	69.6	62.9	61.5	58.2	56.8	57.3	41.1	257.0
42,5°	112.4	100.2	89.3	82.1	75.7	69.6	62.6	62.3	59.5	58.4	60.1	44.3	301.3
45,0°	111.0	99.1	88.8	80.7	74.0	67.9	61.8	60.9	59.0	56.8	58.4	47.5	348.8
47,5°	107.4	96.8	86.8	79.9	73.5	66.2	60.7	59.0	57.9	54.8	56.2	50.3	399.1
50,0°	100.7	91.5	82.9	76.2	69.0	62.3	57.6	55.9	55.1	51.5	54.0	52.3	451.4
52,5°	93.5	86.0	78.2	71.5	64.8	57.9	53.7	51.8	51.5	47.9	50.1	53.6	505.0
55,0°	86.0	79.6	72.9	66.5	60.4	54.0	49.8	48.1	48.1	44.5	47.3	54.1	559.1
57,5°	78.5	72.9	67.3	61.2	55.7	49.8	45.6	44.5	44.0	41.2	44.0	53.6	612.7
60,0°	70.7	65.9	62.1	57.3	51.8	46.2	41.2	40.3	39.5	37.3	40.1	52.0	664.7
62,5°	64.3	60.4	57.6	54.3	49.0	43.7	37.6	36.5	35.6	33.7	36.2	49.4	714.1
65,0°	58.4	55.4	53.4	51.2	46.2	41.2	34.2	32.6	32.3	30.3	32.3	46.5	760.6
67,5°	52.6	50.4	48.7	47.9	43.4	38.4	31.2	28.9	28.4	27.0	28.9	42.9	803.5
70,0°	47.9	45.9	45.4	44.8	40.9	35.9	28.7	26.2	25.6	23.9	26.2	39.5	843.0
72,5°	42.9	41.5	41.2	40.3	37.0	32.3	27.3	23.7	22.3	20.9	22.8	34.4	877.4
75,0°	36.7	35.3	35.3	34.2	30.9	27.0	23.4	20.9	18.9	18.1	19.5	28.6	906.0
77,5°	30.1	28.9	28.4	27.8	24.8	22.0	18.9	17.0	15.9	15.0	16.1	22.5	928.6
80,0°	25.0	23.7	22.8	22.3	20.0	17.8	15.3	13.9	12.8	12.2	12.8	17.0	945.6
82,5°	20.3	18.9	18.4	17.5	15.9	14.2	12.5	11.4	10.6	10.0	10.0	12.8	958.3
85,0°	16.1	15.0	14.2	13.9	12.0	10.9	9.7	9.2	8.3	8.1	7.8	9.4	967.8
87,5°	12.2	10.9	10.3	9.7	9.2	8.3	7.8	7.2	6.7	6.4	6.1	6.9	974.7
90,0°	6.4	5.8	5.6	5.3	4.7	4.5	4.2	3.9	3.9	3.6	3.3	2.3	977.0
92,5°	5.8	5.6	5.3	5.0	4.7	4.2	4.2	3.9	3.6	3.3	3.3	2.2	979.2
95,0°	5.8	5.3	5.3	4.7	4.5	4.2	4.2	3.9	3.6	3.3	3.3	2.0	981.2
97,5°	5.6	5.3	5.0	4.7	4.5	4.2	3.9	3.9	3.6	3.3	3.3	2.0	983.2
100,0°	5.3	5.0	5.0	4.7	4.5	4.2	3.9	3.9	3.6	3.3	3.3	1.9	985.0
102,5°	5.3	5.0	4.7	4.5	4.2	3.9	3.9	3.6	3.3	3.3	3.3	1.8	986.8
105,0°	5.0	4.7	4.5	4.5	4.2	3.9	3.9	3.6	3.3	3.3	3.3	1.7	988.5
107,5°	4.7	4.5	4.5	4.2	3.9	3.9	3.6	3.3	3.3	3.3	2.8	1.6	990.1
110,0°	4.5	4.5	4.2	3.9	3.9	3.9	3.3	3.3	3.3	3.1	2.2	1.5	991.5
112,5°	4.5	4.2	3.9	3.9	3.9	3.3	3.3	3.3	3.3	2.8	1.7	1.4	992.9

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425AF14H + 5XA54000XS EAN: 4058352836477 + 4050737730073	LP number 59112_24
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	5.6	6.1	6.1	6.1	6.1	6.1	6.4	6.7	6.7	6.7	6.7	6.7	6.7
117,5°	5.6	5.6	5.6	5.8	6.1	6.1	6.1	6.1	6.1	6.4	6.7	6.7	6.7
120,0°	5.0	5.0	5.3	5.6	5.6	5.6	5.6	5.8	5.8	6.1	6.1	6.1	6.1
122,5°	4.5	4.5	4.7	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.3	5.6	5.6
125,0°	3.3	3.3	3.3	3.6	3.6	3.6	3.9	3.9	3.9	3.9	3.9	3.9	3.9
127,5°	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.5	2.5	2.2	2.5	2.5
130,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
132,5°	1.7	1.7	1.7	1.7	1.4	1.4	1.4	1.1	1.1	1.1	1.1	1.1	1.1
135,0°	1.7	1.4	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
137,5°	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	0.8	0.8	0.8	0.8	0.6
140,0°	1.1	1.1	1.1	1.1	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
142,5°	0.8	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6	0.6
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425AF14H + 5XA54000XS EAN: 4058352836477 + 4050737730073	LP number 59112_24
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	6.7	7.0	7.0	7.2	5.6	2.2	5.6	5.6	5.0	5.0	5.0	4.5	4.5
117,5°	6.7	6.7	6.7	6.7	4.7	2.2	5.3	5.0	5.0	5.0	4.5	4.5	3.9
120,0°	6.1	6.4	6.1	6.7	4.2	1.7	5.0	5.0	4.5	4.5	4.5	4.2	3.9
122,5°	5.6	5.6	5.6	5.6	3.6	1.7	4.5	4.5	4.2	3.9	3.9	3.9	3.3
125,0°	3.9	3.9	3.9	3.9	2.5	1.1	3.3	3.3	3.1	2.8	2.8	2.8	2.8
127,5°	2.2	2.5	2.2	2.2	1.7	1.1	2.2	2.2	2.2	2.2	2.2	2.2	2.2
130,0°	1.7	1.7	1.7	1.4	1.1	0.6	1.7	1.7	1.7	1.7	1.7	1.7	1.7
132,5°	1.1	1.1	1.1	1.1	0.8	1.1	1.7	1.7	1.7	1.7	1.7	1.7	1.7
135,0°	1.1	1.1	1.1	1.1	0.6	0.6	1.7	1.4	1.4	1.4	1.7	1.7	1.7
137,5°	0.8	0.6	0.6	0.6	0.6	0.6	1.1	1.1	1.1	1.1	1.1	1.1	1.1
140,0°	0.6	0.6	0.6	0.6	0.6	0.6	1.1	1.1	1.1	1.1	1.1	1.1	1.1
142,5°	0.6	0.6	0.6	0.6	0.6	0.6	0.8	0.6	1.1	1.1	1.1	1.1	1.1
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425AF14H + 5XA54000XS EAN: 4058352836477 + 4050737730073	LP number 59112_24
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	4.2	3.9	3.9	3.9	3.6	3.3	3.3	3.3	3.1	2.5	1.7	1.3	994.2
117,5°	3.9	3.9	3.9	3.6	3.3	3.3	3.3	2.8	2.8	2.2	1.7	1.2	995.4
120,0°	3.9	3.9	3.3	3.3	3.3	3.3	2.8	2.8	2.8	2.2	1.7	1.1	996.5
122,5°	3.3	3.3	3.3	2.8	2.8	2.8	2.8	2.8	2.2	1.9	1.7	1.0	997.5
125,0°	2.8	2.8	2.8	2.2	2.2	2.2	2.2	2.2	2.2	1.7	1.7	0.7	998.2
127,5°	2.2	2.2	1.9	1.7	1.7	1.7	1.7	1.7	1.7	1.4	1.1	0.5	998.6
130,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.4	1.1	1.1	0.3	999.0
132,5°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.4	1.1	1.1	0.3	999.3
135,0°	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.1	1.1	1.1	0.3	999.5
137,5°	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	0.2	999.7
140,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	0.2	999.9
142,5°	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	0.1	1000.0
145,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
147,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family LITEPOLE 2	Order number: 5XA5425AF14H + 5XA54000XS EAN: 4058352836477 + 4050737730073	LP number 59112_24
------------------------------------	---------------------------------------------------------------------------------------------	-------------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	1460	12.9	13.3	13.1
95	241	252	1385	12.2	12.6	12.4
90	229	250	1316	11.5	11.9	11.7
85	216	248	1242	10.7	11.1	10.9
80	203	246	1167	10.1	10.5	10.3
75	190	243	1092	9.4	9.8	9.6
70	178	241	1023	8.9	9.1	9.0
65	165	238	948	8.2	8.4	8.3
60	152	235	874	7.6	7.8	7.7
55	140	232	805	7.0	7.2	7.1
50	127	229	730	6.4	6.6	6.5
45	114	225	655	5.8	6.0	5.9
40	102	221	586	5.3	5.4	5.4
35	89	216	512	4.8	4.9	4.8
30	76	210	437	4.3	4.3	4.3
25	63	203	362	3.7	3.8	3.8
24	60	201	345	3.5	3.7	3.6