
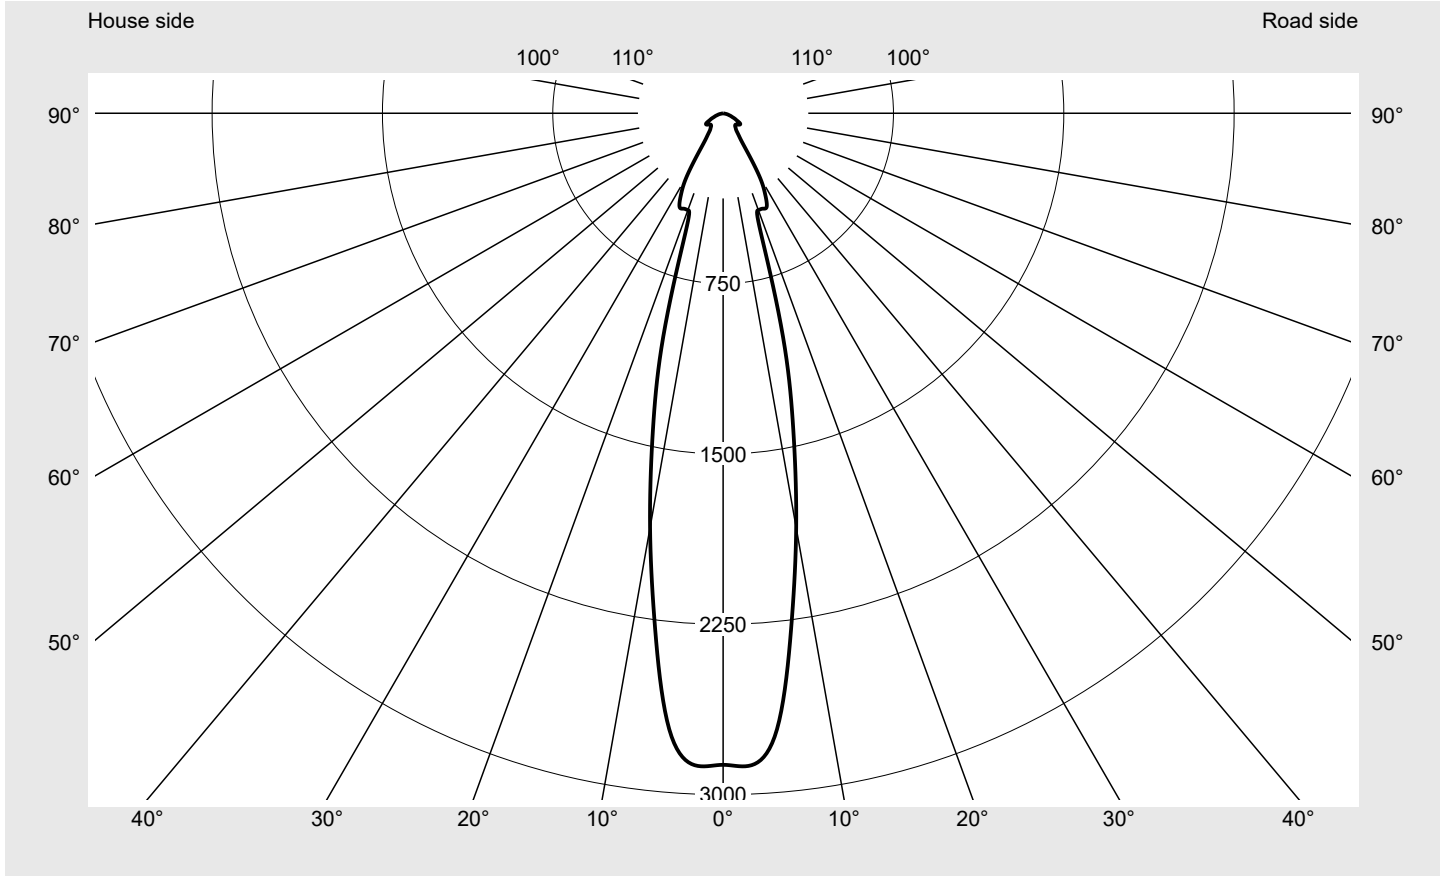


Photometric test report

Family Floodlight FL11	Order number: 5XA779114M01BA EAN: 4058352536551	LP number 59238_10
	Version standard bracket Optic symmetric distribution RS12 Cover toughened safety glass Lamps LED 5700 K CRI ≥ 90 Controlgear ECG Rated values Ta = 10 °C Net luminous flux = 76660 lm Power consumption = 707.9 W Luminous efficacy = 108.3 lm/W	serial documentation 14.03.2023



Luminous intensity in cd/klm C180-0 **Imax: 2873 cd/klm**



Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	36.4
Imax 80°	9.1
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL11	Order number: 5XA779114M01BA EAN: 4058352536551	LP number 59238_10
----------------------------------	--	------------------------------

Envelope curve in cd/klm KMK 2.5° KMK 0° siteco

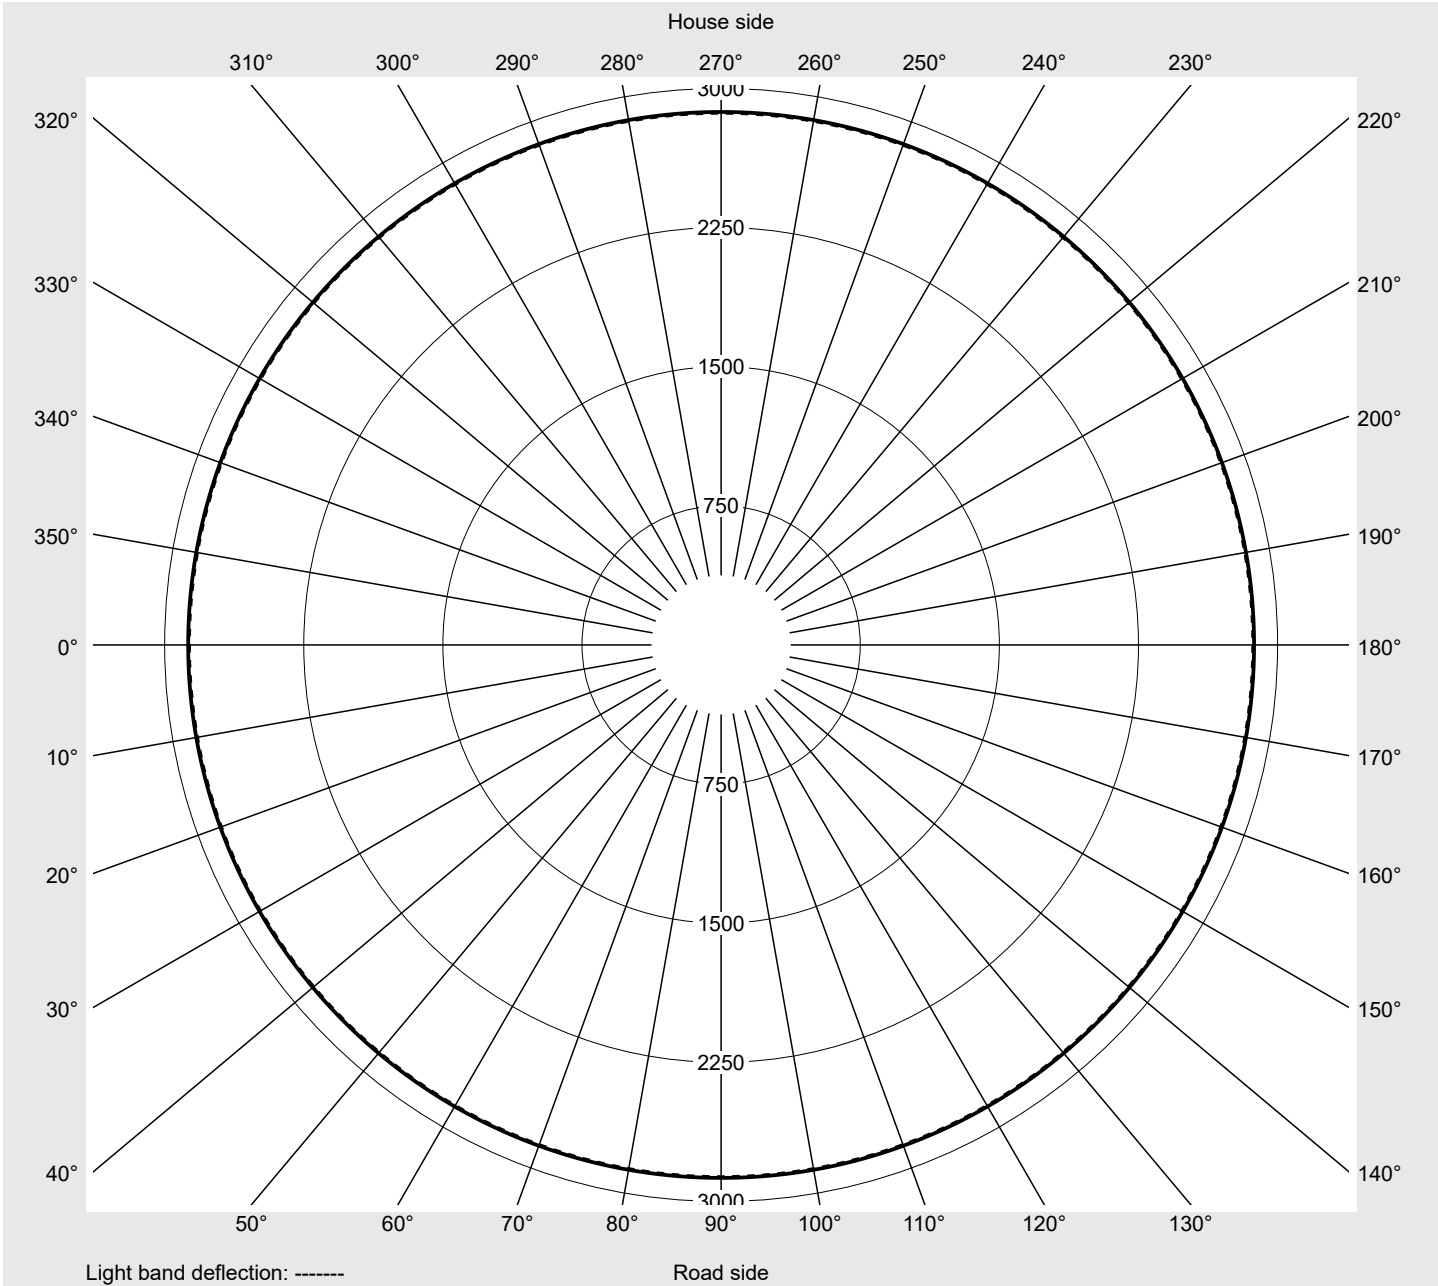

Photometric test report

Family Floodlight FL11	Order number: 5XA779114M01BA EAN: 4058352536551	LP number 59238_10
----------------------------------	--	------------------------------



Table of values for luminous intensities	Maximum luminous intensity
---	-----------------------------------

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0,0°	2868.8	4.3	4.3
2,5°	2873.2	34.4	38.6
5,0°	2722.5	65.0	103.7
7,5°	2292.0	82.0	185.7
10,0°	1852.6	88.2	273.9
12,5°	1427.9	84.7	358.6
15,0°	1018.5	72.3	430.9
17,5°	552.2	45.5	476.4
20,0°	453.7	42.5	518.9
22,5°	454.7	47.7	566.6
25,0°	454.2	52.6	619.2
27,5°	400.1	50.6	669.9
30,0°	317.0	43.5	713.3
32,5°	178.5	26.3	739.6
35,0°	121.9	19.2	758.8
37,5°	96.3	16.1	774.9
40,0°	86.4	15.2	790.1
42,5°	78.8	14.6	804.7
45,0°	75.0	14.5	819.2
47,5°	74.2	15.0	834.2
50,0°	76.8	16.1	850.4
52,5°	82.1	17.9	868.2
55,0°	87.5	19.7	887.9
57,5°	89.5	20.7	908.6
60,0°	83.0	19.7	928.3
62,5°	67.2	16.3	944.6
65,0°	57.1	14.2	958.8
67,5°	43.9	11.1	969.9
70,0°	36.4	9.4	979.3
72,5°	27.1	7.1	986.4
75,0°	21.2	5.6	992.0
77,5°	13.7	3.7	995.6
80,0°	9.1	2.5	998.1
82,5°	4.7	1.3	999.4
85,0°	1.8	0.5	999.9
87,5°	0.5	0.1	1000.0
90,0°	0.0	0.0	1000.0

Photometric test report

Family
Floodlight FL11

Order number: 5XA779114M01BA
EAN: 4058352536551

LP number
59238_10

Dimming levels table

environmental temperature: 10°C

siteco

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	76660	707.9
95	237	72764	659.1
90	222	69088	616.0
85	206	65115	570.9
80	191	61231	528.5
75	177	57451	489.2
70	163	53580	450.2
65	150	49879	414.3
60	136	45942	375.2
55	123	42012	339.7
50	111	38295	306.8
45	99	34549	274.0
40	87	30743	240.8
35	75	26769	208.3
30	64	23128	179.0
25	52	19011	147.1
20	41	15167	118.0
15	30	11331	89.3
10	20	7683	63.1
5	9	3650	34.6
2	3	1413	18.1

Dimming levels table

environmental temperature: 25°C

Luminous flux %	Dimming level linear	Luminous flux [lm]	Power consumption [W]
100	254	74020	702.9
95	236	70208	651.5
90	220	66559	605.8
85	204	62803	560.8
80	189	59107	518.6
75	175	55512	479.4
70	161	51835	440.7
65	148	48229	405.1
60	134	44417	366.3
55	121	40616	330.9
50	109	37030	298.4
45	97	33349	265.9
40	85	29628	233.1
35	73	25759	200.9
30	62	22141	171.9
25	51	18436	142.9
20	40	14650	114.1
15	30	11212	88.2
10	19	7255	59.9
5	9	3619	34.3
2	3	1401	17.9

Photometric test report

Family Floodlight FL11	Order number: 5XA779114M01BA EAN: 4058352536551	LP number 59238_10
----------------------------------	--	------------------------------

Luminousfluxs table **siteco**

Temperature °C	Luminous flux lm	Power consumption W
10.0	76660.0	707.9
25.0	74020.0	702.9