

## Photometric test report

Family  
**Silica® 21**



Order number: **51MX37DA47WB**  
EAN: **4058352885499**

LP number  
**59284\_74**

**Version** Suspended luminaire, reflector, white, direct-/indirect distribution, asymmetric distribution  
**Lamps** LED 4000 K | CRI ≥ 80  
**Controlgear** ECG-DALI  
**Rated values** Net luminous flux = 7300 lm  
Power consumption = 44.0 W  
Luminous efficacy = 165.9 lm/W

serial  
documentation  
**02.08.2023**


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 452 cd/klm

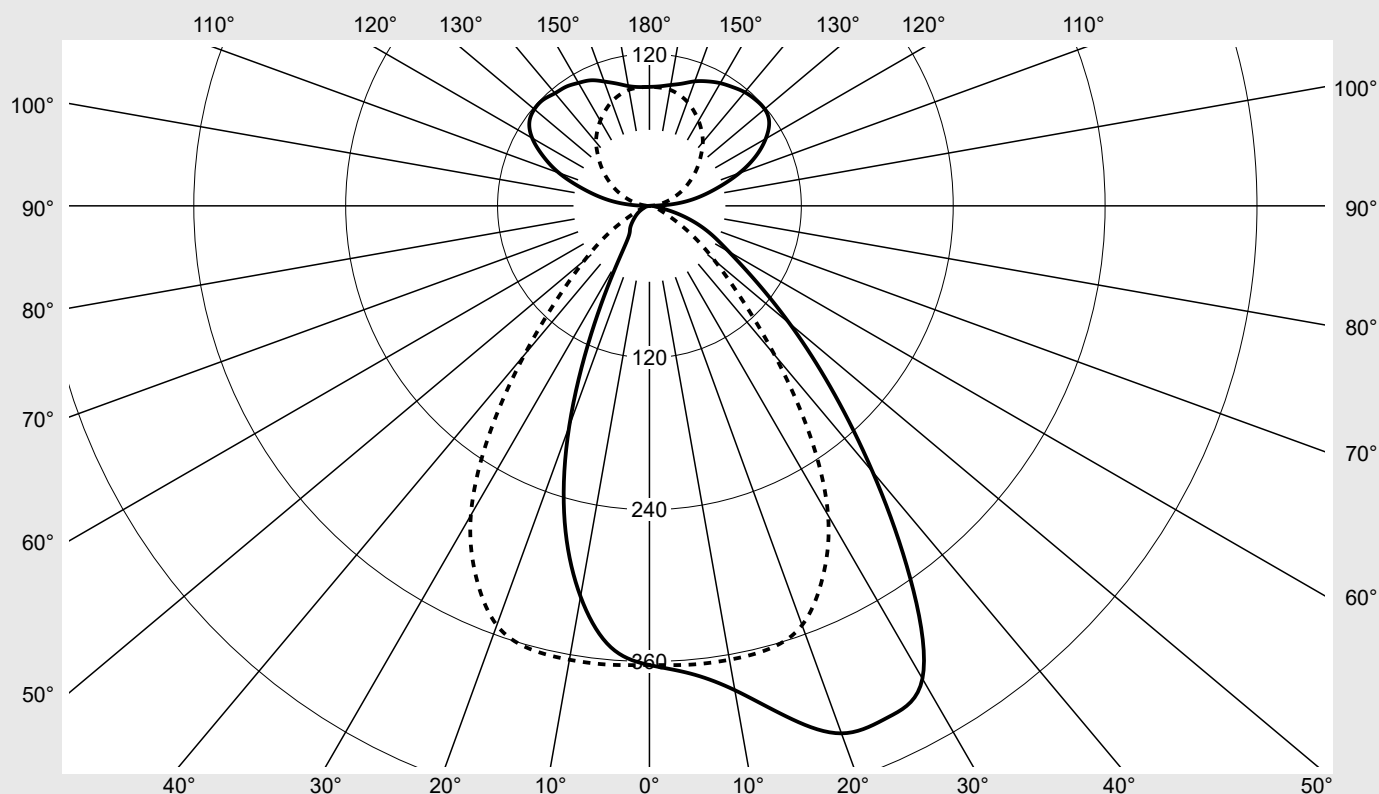

#### Classifications

DIN 5040 C 5 2  
CIE N1=71 N2=92 N3=99  
N4=59 N5=100

#### Luminaire light output ratios

$\eta_{LB}$  100.0%  
 $\phi_u$  59.0%  
 $\phi_o$  41.0%

#### Measurement conditions

DIN EN 13032 and DIN 5032

## Photometric test report

Family <b>Silica® 21</b>	Order number: <b>51MX37DA47WB</b> EAN: <b>4058352885499</b>	LP number <b>59284_74</b>
Table of values for luminous intensities		Maximum luminous intensity
		<b>siteco</b>

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
$\gamma$	Luminous intensity in cd/klm						
0°	362.8	362.8	362.8	362.8	362.8	362.8	362.8
5°	370.9	371.6	370.9	369.3	368.9	367.2	363.9
10°	388.6	388.5	387.1	385.7	381.5	371.9	364.1
15°	417.6	422.5	420.8	414.5	399.0	379.0	362.6
20°	443.5	449.9	449.8	438.4	406.1	374.1	352.6
25°	445.9	451.8	444.0	423.3	391.5	349.7	323.9
30°	431.3	429.9	420.1	385.1	347.8	308.2	282.3
35°	359.2	357.5	355.5	331.7	286.9	244.3	220.9
40°	274.3	279.4	286.0	275.4	231.4	180.4	153.7
45°	201.9	208.2	223.0	216.2	179.6	126.4	101.0
50°	144.4	152.7	166.7	164.5	134.4	88.4	67.1
55°	100.9	110.3	125.4	123.1	101.8	61.8	43.4
60°	72.5	78.2	92.0	93.5	77.9	39.9	24.1
65°	54.7	57.3	65.1	70.1	53.6	24.1	12.4
70°	38.2	41.6	47.1	47.8	32.4	14.4	7.5
75°	21.3	25.0	32.7	24.9	16.8	8.6	4.2
80°	7.7	8.6	12.1	11.3	8.4	4.0	2.2
85°	3.8	3.9	4.0	3.3	2.1	1.6	1.4
90°	4.7	4.6	4.9	4.8	2.9	1.0	0.4
95°	22.0	22.5	24.1	22.9	14.6	7.5	3.9
100°	39.5	40.4	40.7	35.9	24.0	13.5	8.9
105°	56.3	57.6	56.5	48.2	33.0	20.4	15.0
110°	75.5	76.2	71.2	59.4	42.4	27.6	21.4
115°	92.7	91.8	84.6	69.6	51.2	34.9	28.6
120°	106.1	104.5	95.4	77.8	59.8	41.9	35.6
125°	115.5	112.5	102.3	85.9	66.7	48.6	43.0
130°	118.9	116.4	105.4	89.8	72.4	55.5	50.4
135°	118.5	116.1	106.5	93.2	76.8	62.2	57.9
140°	117.2	115.0	106.5	95.4	80.4	68.3	65.6
145°	114.6	113.5	107.0	96.5	83.7	73.9	71.9
150°	111.9	111.4	106.1	96.6	86.1	79.3	77.7
155°	108.5	108.5	103.0	95.9	88.2	84.3	82.8
160°	104.7	104.6	99.8	95.1	90.4	87.6	87.5
165°	100.0	99.6	96.8	93.8	91.9	90.5	90.8
170°	97.0	96.1	95.3	93.8	93.1	93.1	93.1
175°	94.8	94.4	93.7	93.5	93.8	93.7	93.8
180°	94.0	94.0	94.0	94.0	94.0	94.0	94.0

## Photometric test report

Family <b>Silica® 21</b>	Order number: <b>51MX37DA47WB</b> EAN: <b>4058352885499</b>	LP number <b>59284_74</b>
Table of values for luminous intensities		Maximum luminous intensity
		<b>sITeco</b>

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
$\gamma$	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	362.8	362.8	362.8	362.8	362.8	362.8	2.2	2.2
5°	361.1	357.7	355.2	351.7	350.7	350.1	17.3	19.5
10°	354.6	345.8	334.7	324.3	315.6	313.4	34.1	53.6
15°	349.2	329.3	304.2	278.4	262.9	258.7	50.4	104.0
20°	331.4	301.7	258.1	215.5	192.6	185.2	63.8	167.8
25°	301.5	254.0	195.2	148.3	115.3	102.8	70.9	238.7
30°	250.8	197.1	132.9	80.9	53.4	46.2	71.4	310.1
35°	183.1	132.2	77.3	40.6	29.9	28.0	64.3	374.4
40°	120.2	80.2	41.8	27.0	24.2	23.8	54.3	428.7
45°	76.8	47.8	25.9	22.0	20.4	20.0	43.9	472.6
50°	49.9	29.0	19.6	18.1	16.6	16.0	34.5	507.1
55°	31.7	19.0	15.4	14.5	13.2	12.7	26.8	533.9
60°	17.1	12.8	11.6	11.2	10.2	9.6	20.2	554.1
65°	9.9	8.8	8.5	8.3	7.4	6.6	14.7	568.8
70°	6.3	5.9	5.8	5.6	5.0	4.4	10.3	579.1
75°	3.7	3.5	3.4	3.5	3.3	3.0	6.3	585.4
80°	2.1	2.0	2.0	2.1	2.0	2.0	2.8	588.2
85°	1.4	1.3	1.4	1.4	1.4	1.4	1.2	589.3
90°	1.0	2.9	4.8	4.8	4.6	4.7	1.9	591.2
95°	7.5	14.6	22.8	24.1	22.5	22.0	9.5	600.7
100°	13.5	23.9	35.5	40.7	40.4	39.1	16.0	616.8
105°	20.5	32.9	48.2	56.4	57.6	56.5	22.2	638.9
110°	27.6	42.2	59.3	71.4	75.9	76.1	27.9	666.9
115°	34.9	51.3	69.7	84.7	91.8	92.6	32.5	699.4
120°	42.0	59.5	78.1	95.7	105.1	106.9	35.7	735.1
125°	48.7	66.8	85.3	102.0	112.4	115.8	37.0	772.1
130°	55.5	71.9	90.3	105.2	115.9	118.7	36.7	808.7
135°	61.7	76.2	93.0	106.5	116.2	118.6	35.0	843.8
140°	67.8	79.8	95.1	107.1	114.8	116.1	32.7	876.4
145°	73.5	83.2	96.5	106.6	113.5	114.9	29.7	906.2
150°	78.9	86.2	96.2	105.0	111.8	112.2	26.2	932.4
155°	83.7	88.3	96.1	102.8	108.8	109.4	22.2	954.6
160°	87.9	89.8	95.3	99.8	104.2	104.5	17.9	972.5
165°	90.9	92.1	94.4	97.4	99.3	100.0	13.4	986.0
170°	93.1	93.4	94.5	95.5	96.0	96.1	9.0	994.9
175°	93.9	93.7	94.0	94.2	94.4	94.2	4.5	999.4
180°	94.0	94.0	94.0	94.0	94.0	94.0	0.6	1000.0

## Photometric test report

Family <b>Silica® 21</b>	Order number: <b>51MX37DA47WB</b> EAN: <b>4058352885499</b>	LP number <b>59284_74</b>
-----------------------------	--	------------------------------


UGR-Table		Standard room									
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	22.1	23.1	23.0	23.9	25.0	17.9	18.9	18.8	19.7	20.8
	3H	22.7	23.5	23.5	24.3	25.4	17.9	18.7	18.8	19.6	20.7
	4H	22.8	23.5	23.7	24.4	25.5	17.8	18.6	18.7	19.5	20.6
	6H	22.7	23.4	23.6	24.3	25.4	17.7	18.4	18.6	19.3	20.4
	8H	22.6	23.3	23.6	24.2	25.4	17.6	18.3	18.5	19.2	20.3
	12H	22.6	23.1	23.5	24.1	25.2	17.5	18.1	18.4	19.0	20.2
4H	2H	22.4	23.2	23.3	24.0	25.1	18.5	19.3	19.4	20.2	21.3
	3H	23.1	23.8	24.1	24.7	25.8	18.7	19.4	19.6	20.3	21.4
	4H	23.4	24.0	24.3	24.9	26.1	18.7	19.3	19.6	20.2	21.4
	6H	23.4	23.9	24.3	24.8	26.0	18.6	19.1	19.6	20.0	21.2
	8H	23.3	23.8	24.3	24.7	25.9	18.6	19.0	19.5	19.9	21.2
	12H	23.3	23.6	24.2	24.6	25.8	18.5	18.9	19.4	19.8	21.0
8H	4H	23.4	23.8	24.3	24.8	26.0	18.9	19.3	19.8	20.2	21.4
	6H	23.4	23.8	24.4	24.8	26.0	18.8	19.2	19.8	20.2	21.4
	8H	23.4	23.7	24.4	24.7	25.9	18.8	19.1	19.8	20.1	21.3
	12H	23.4	23.6	24.4	24.6	25.9	18.7	19.0	19.7	20.0	21.3
12H	4H	23.3	23.7	24.2	24.6	25.8	18.8	19.2	19.8	20.1	21.4
	6H	23.4	23.7	24.4	24.7	25.9	18.8	19.1	19.8	20.1	21.3
	8H	23.4	23.6	24.3	24.6	25.9	18.8	19.0	19.8	20.0	21.3

Luminance table		Max. for $\gamma \geq 65^\circ$											
		Photometric dimensions in mm: L = 1176 B = 49											
C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°
$\gamma$	Luminance in cd/m <sup>2</sup>												
45°	36167.6	37298.2	39954.9	38741.3	32183.1	22646.4	18101.2	13762.7	8557.3	4643.4	3949.7	3661.3	3576.3
50°	28456.0	30086.1	32854.7	32413.9	26488.3	17427.4	13217.7	9834.5	5723.3	3866.2	3564.1	3264.9	3143.5
55°	22288.0	24363.2	27699.2	27181.9	22479.5	13655.2	9577.6	7001.4	4200.6	3393.8	3203.4	2911.7	2796.4
60°	18374.9	19821.1	23312.8	23681.2	19727.4	10120.7	6099.3	4340.9	3250.4	2933.0	2833.9	2577.8	2425.2
65°	16384.5	17176.1	19508.3	21009.2	16064.0	7217.3	3725.4	2955.0	2634.9	2551.2	2491.0	2219.1	1982.3
70°	14144.0	15405.6	17430.2	17686.5	12015.3	5331.5	2776.9	2316.1	2172.8	2137.6	2082.4	1847.5	1619.0
75°	10410.0	12252.3	15995.8	12181.4	8223.0	4195.2	2047.0	1810.5	1728.3	1681.3	1697.0	1604.0	1489.9
80°	5592.7	6265.3	8834.0	8273.0	6104.8	2902.8	1626.9	1508.0	1458.4	1484.6	1524.0	1481.7	1423.3
85°	5558.3	5609.2	5863.5	4843.2	3103.3	2267.5	2008.8	1982.6	1925.9	2004.4	2093.1	2058.2	2017.5

**Photometric test report**

<b>Family</b> <b>Silica® 21</b>	<b>Order number: 51MX37DA47WB</b> <b>EAN: 4058352885499</b>	<b>LP number</b> <b>59284_74</b>
------------------------------------	--	-------------------------------------

**Luminance values in cd/m<sup>2</sup>**     γ 65°    γ 70°    γ 75°    γ 80°    γ 85°     **siteco**

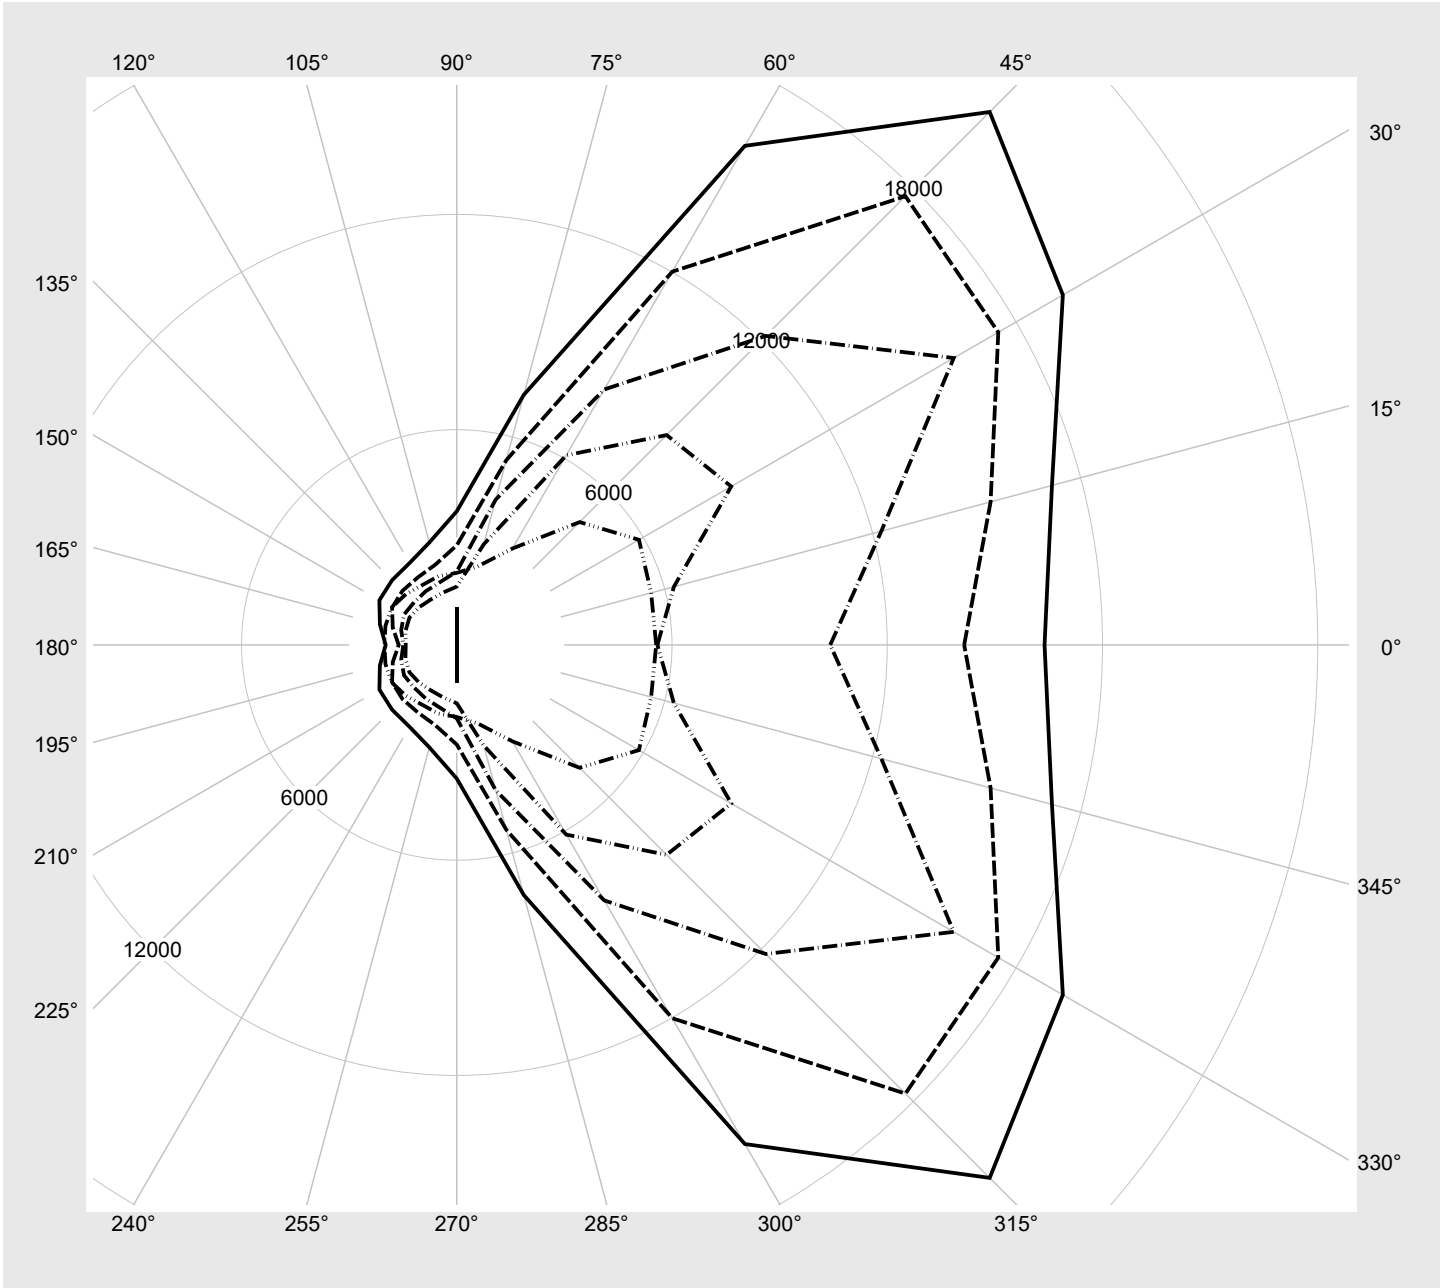

## Photometric test report

<b>Family</b> Silica® 21	<b>Order number: 51MX37DA47WB</b> <b>EAN: 4058352885499</b>	<b>LP number</b> <b>59284_74</b>
-----------------------------	--	-------------------------------------

<b>Dimming levels table</b>	environmental temperature: 25°C	<b>sITeco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	7300	44.0
95	241	252	6946	41.8
90	227	250	6563	39.4
85	214	248	6204	37.2
80	201	245	5842	35.0
75	188	243	5479	32.8
70	175	240	5114	30.6
65	162	238	4746	28.5
60	149	234	4376	26.2
55	136	231	4003	24.1
50	124	228	3658	22.1
45	111	224	3282	20.0
40	99	219	2933	18.0
35	86	214	2552	15.9
30	74	209	2198	14.0
25	61	202	1812	11.8
20	49	194	1456	9.7
15	37	183	1097	7.8
10	25	169	738	5.9
5	13	145	377	4.0
2	6	117	166	3.4