




Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
	Version post-top or side-entry mounting Optic pedestrian crossing, asymmetric right distribution (PC-R) Cover transparent, PMMA Lamps LED 2200 K CRI ≥ 70 Controlgear ECG SITECO iQ Rated values Net luminous flux = 12740 lm Power consumption = 124.7 W Luminous efficacy = 102.2 lm/W	serial documentation 31.07.2023
		

Luminous intensity in cd/klm C180-0 C205-25 C210-30 C270-90 **Imax: 835 cd/klm**

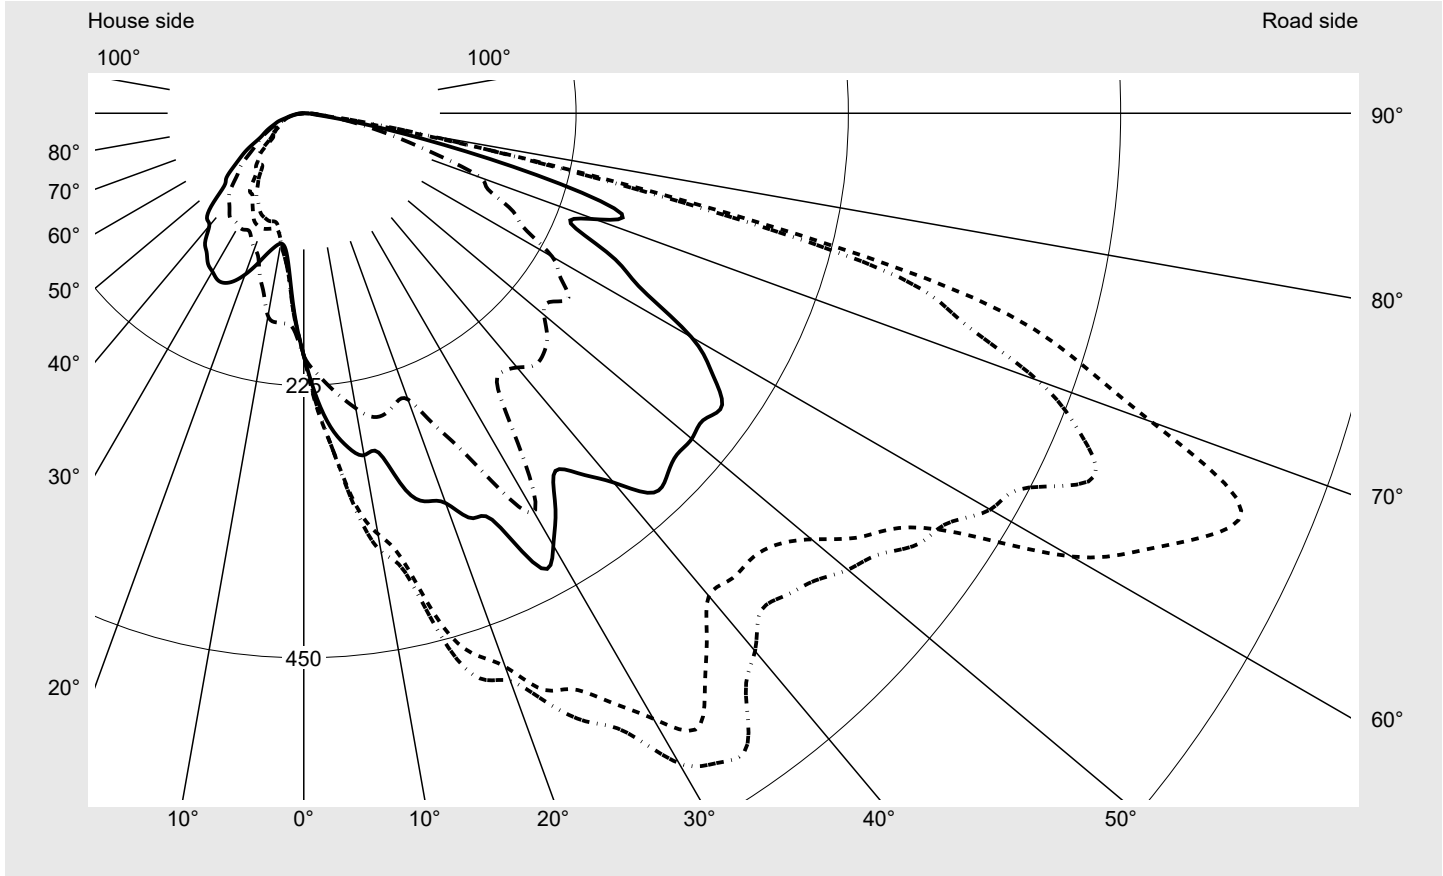

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2


Class:	G3
Imax 70°	745.4
Imax 80°	99.8
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
---	--	--------------------------------------

Envelope curve in cd/klm **KMK 67.5°** **KMK 65°** **KMK 62.5°** **KMK 60°** **siteco**

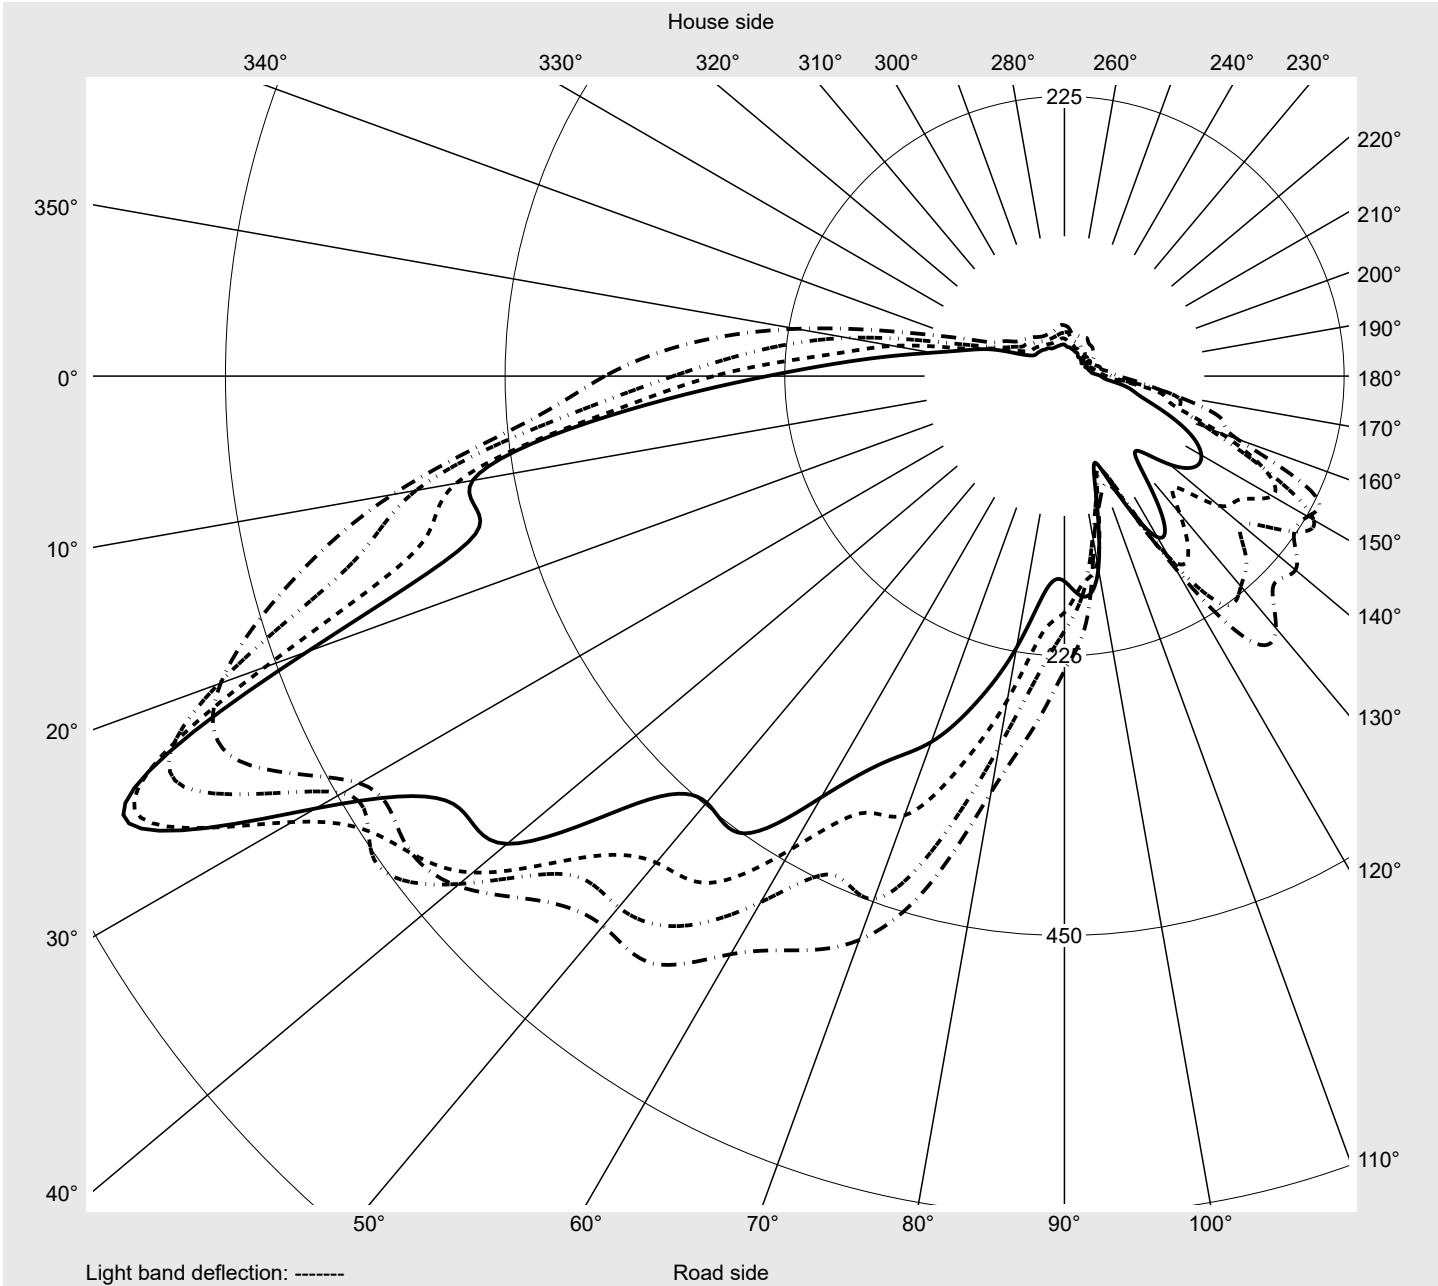

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	234.1	234.9	237.3	240.8	241.6	242.8	241.0	237.7	235.3	233.0	232.8	231.6	231.0	228.3
5,0°	261.2	274.7	280.2	280.4	280.2	280.2	280.4	284.7	292.2	294.5	290.2	286.1	279.2	272.0
7,5°	278.1	285.5	296.7	312.2	320.2	325.7	330.8	334.2	337.7	341.6	344.7	337.3	324.0	305.1
10,0°	286.9	306.5	317.5	333.2	348.1	353.0	367.9	377.7	385.5	392.6	387.1	382.2	380.4	370.4
12,5°	287.5	311.6	325.9	341.4	366.3	378.3	389.1	397.1	396.5	401.8	410.4	399.3	380.2	365.9
15,0°	321.0	348.3	375.3	395.9	415.1	436.1	454.0	454.0	437.7	426.9	418.1	405.1	387.3	372.4
17,5°	336.3	373.0	394.9	420.2	442.0	468.7	490.4	492.8	496.7	479.3	459.7	426.5	401.4	377.7
20,0°	342.8	381.8	414.0	451.8	478.1	486.7	499.3	516.5	509.9	502.6	491.2	469.5	449.1	404.0
22,5°	362.2	388.5	420.0	462.8	495.7	515.2	527.7	528.3	523.0	522.2	517.5	523.0	492.8	457.3
25,0°	372.0	427.1	474.6	494.0	505.0	525.0	554.8	571.6	591.8	558.7	552.4	540.3	517.7	472.4
27,5°	423.4	473.2	493.6	496.1	514.0	548.5	576.5	613.0	634.2	640.7	614.4	566.1	555.0	523.2
30,0°	412.4	439.7	479.7	545.0	564.4	577.7	620.1	609.5	622.2	649.5	647.9	601.8	565.4	534.2
32,5°	387.1	449.1	500.6	557.3	582.8	603.4	636.5	654.6	661.1	673.8	686.7	657.7	608.3	579.3
35,0°	361.6	404.6	441.8	492.2	562.0	577.9	638.5	639.3	685.4	719.9	733.4	716.7	669.3	635.8
37,5°	375.7	403.4	418.1	448.7	498.1	547.1	599.9	660.1	690.1	741.8	773.8	772.4	729.7	678.3
40,0°	398.3	408.5	417.9	438.5	462.0	520.8	580.1	662.4	724.4	792.2	768.9	783.8	736.9	693.2
42,5°	425.5	426.5	428.3	445.5	482.8	522.4	558.7	635.0	718.5	747.5	786.8	754.0	716.7	689.7
45,0°	424.2	435.9	437.7	464.6	490.6	521.8	563.4	603.2	697.5	757.7	764.8	741.1	729.5	678.5
47,5°	417.9	426.1	448.5	480.4	508.9	528.3	572.0	596.5	654.4	723.6	744.4	731.3	718.9	674.4
50,0°	418.5	440.6	481.0	489.3	519.5	547.7	586.9	607.3	642.0	679.5	718.5	716.2	687.5	666.5
52,5°	416.3	441.6	490.4	507.7	546.3	576.1	598.9	628.7	649.7	657.1	685.6	686.0	659.5	636.5
55,0°	421.8	451.2	494.0	548.3	605.4	597.9	620.3	641.6	618.7	628.3	641.6	632.4	625.4	597.1
57,5°	400.2	460.2	545.7	614.8	680.9	647.5	630.5	633.2	637.3	604.8	599.9	608.7	567.1	557.5
60,0°	369.8	436.5	548.9	645.4	722.4	732.6	655.0	649.7	637.9	596.9	577.5	576.9	537.1	509.7
62,5°	314.7	412.4	529.7	597.7	724.4	781.7	670.9	678.1	635.6	566.9	557.9	540.1	488.7	442.6
65,0°	282.2	378.3	497.1	539.7	684.4	825.4	717.5	656.9	621.4	547.7	511.0	497.7	439.3	388.1
67,5°	239.2	368.1	483.4	490.6	648.3	835.4	695.6	600.1	585.4	486.1	447.9	449.1	391.4	342.8
70,0°	255.9	379.3	476.9	494.8	561.4	745.4	645.6	559.9	510.8	436.5	401.0	392.2	324.2	291.0
72,5°	275.1	380.6	448.3	489.1	547.9	663.8	568.7	464.8	396.5	364.2	319.4	302.8	259.4	217.5
75,0°	204.5	315.3	388.5	434.2	476.7	543.6	487.3	345.7	283.4	250.4	266.7	273.2	216.7	162.4
77,5°	112.2	180.8	224.7	278.1	266.1	275.5	248.5	199.0	172.8	169.0	193.4	205.1	156.5	116.9
80,0°	47.7	55.1	72.4	96.9	82.0	82.4	99.1	99.8	98.7	98.5	77.7	98.5	86.7	68.4
82,5°	12.2	14.1	15.9	18.4	21.4	23.5	31.6	41.6	37.8	35.7	33.9	40.0	41.6	41.4
85,0°	8.0	8.8	9.8	10.8	11.4	12.0	12.0	12.0	12.0	12.7	14.3	16.5	18.8	21.4
87,5°	3.5	5.3	6.1	6.7	7.1	7.6	7.6	7.3	7.1	6.7	6.5	6.5	6.7	7.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°	125°	130°	135°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	225.1	222.6	220.2	217.7	213.6	209.4	205.1	201.2	196.3	192.8	190.4	188.6	186.5	184.5
5,0°	261.8	248.1	237.5	230.8	225.1	221.2	214.1	207.7	197.7	189.8	183.4	176.7	172.0	166.9
7,5°	291.4	283.4	268.3	254.7	236.5	225.9	215.3	200.4	188.6	177.5	172.4	160.2	150.8	144.7
10,0°	346.3	318.7	294.3	265.1	247.5	228.3	210.8	195.7	181.0	165.1	157.1	150.6	145.7	141.4
12,5°	357.9	333.8	294.3	277.3	256.7	230.2	216.5	199.4	180.2	166.9	159.8	153.7	142.0	136.9
15,0°	347.5	323.4	302.6	272.0	257.5	241.8	220.8	196.9	178.8	167.7	161.6	150.4	141.8	139.0
17,5°	347.5	317.7	297.7	265.1	251.6	227.7	208.1	190.4	176.5	164.3	156.9	152.8	149.4	144.1
20,0°	367.1	328.7	323.0	282.6	251.6	242.2	212.4	192.0	171.8	163.7	157.5	154.7	154.7	151.4
22,5°	386.3	351.2	328.1	295.7	276.7	253.8	223.2	196.7	176.9	164.5	156.9	155.1	157.7	158.3
25,0°	430.8	386.3	341.0	317.9	305.9	270.6	231.6	194.7	173.2	164.7	157.9	157.1	160.6	165.1
27,5°	475.5	434.2	385.3	368.5	349.8	307.5	237.9	192.4	170.6	158.6	155.9	160.8	165.7	173.0
30,0°	518.7	476.5	411.6	377.3	380.6	291.0	227.9	183.2	164.5	158.8	157.3	164.1	173.2	181.2
32,5°	548.3	502.0	409.1	338.3	337.5	265.3	209.2	177.7	158.3	154.3	159.4	169.6	179.8	191.0
35,0°	594.0	514.6	418.7	327.3	280.8	235.3	187.3	167.9	154.9	154.5	162.4	175.3	189.8	200.0
37,5°	602.4	508.1	427.3	337.1	269.4	214.7	175.9	162.4	153.2	154.1	165.7	181.6	196.9	207.9
40,0°	627.3	540.1	456.3	351.8	274.3	202.4	169.4	158.1	147.5	151.6	167.1	188.3	205.7	218.8
42,5°	625.2	560.3	489.3	373.4	282.2	201.2	168.6	155.7	142.6	149.6	165.5	192.8	209.8	238.3
45,0°	648.9	555.9	494.4	372.4	280.4	206.1	165.7	149.8	138.6	144.7	165.9	191.8	223.0	243.9
47,5°	636.0	546.1	474.6	363.6	272.8	204.7	167.7	144.1	135.7	141.6	162.6	194.7	232.6	260.2
50,0°	596.1	513.8	447.3	340.6	259.2	212.8	169.6	137.9	130.0	136.3	161.8	204.1	251.0	260.4
52,5°	585.6	493.8	403.4	319.1	256.1	207.7	161.0	129.4	121.8	129.2	170.6	224.7	270.6	261.2
55,0°	576.9	485.3	382.6	305.5	266.7	222.0	163.2	124.5	114.7	136.9	177.9	239.6	270.4	266.5
57,5°	528.7	471.8	344.9	309.8	251.0	208.5	150.6	118.2	105.1	123.9	177.3	253.8	276.3	256.1
60,0°	482.8	425.3	340.0	283.8	237.1	199.4	136.5	107.5	93.5	108.2	178.8	259.6	264.7	237.9
62,5°	447.7	386.5	303.0	241.0	205.1	174.7	131.0	99.2	82.0	100.8	169.6	224.5	220.8	206.7
65,0°	376.1	326.1	264.9	208.1	190.2	167.7	152.6	104.1	79.0	104.9	169.2	173.7	144.3	126.5
67,5°	313.2	271.0	221.8	173.2	165.1	178.1	157.1	97.7	74.5	109.4	149.6	136.9	93.9	85.5
70,0°	255.1	226.9	179.4	146.5	155.3	166.1	127.1	83.3	73.9	92.0	116.3	106.1	67.3	73.3
72,5°	190.2	181.6	133.0	116.5	118.6	115.3	83.9	47.5	49.2	64.7	63.9	63.7	47.1	58.6
75,0°	129.2	128.4	107.5	92.6	85.1	67.1	44.3	31.4	29.6	46.1	35.7	38.8	38.4	40.6
77,5°	91.8	89.8	79.2	66.5	58.8	42.6	29.8	25.3	24.3	24.9	29.0	29.0	29.0	26.9
80,0°	64.7	61.4	54.9	43.7	38.0	27.1	21.4	20.6	19.0	19.0	20.6	19.8	18.4	19.4
82,5°	41.6	39.0	34.1	28.4	23.1	17.3	14.5	15.5	16.1	13.3	12.7	13.5	12.9	12.9
85,0°	22.0	20.0	17.8	15.3	11.6	8.8	7.1	8.4	10.0	8.4	7.8	8.2	8.0	8.0
87,5°	7.8	7.8	6.1	4.7	3.9	2.9	2.7	3.3	3.1	3.5	3.7	3.7	3.7	3.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	140°	145°	150°	155°	160°	165°	170°	175°	180°	185°	190°	195°	200°	205°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	182.8	181.8	180.8	179.4	176.5	173.5	171.2	169.0	167.9	167.9	168.6	169.2	169.8	169.8
5,0°	161.6	156.7	153.9	150.0	146.7	141.8	138.4	135.1	133.9	133.7	134.5	135.3	136.3	137.9
7,5°	139.8	134.7	131.8	129.4	125.9	121.2	118.8	115.9	113.9	113.5	115.3	117.1	118.8	119.6
10,0°	134.3	129.0	126.9	124.1	120.0	116.5	114.3	112.0	109.4	107.3	107.3	106.7	106.7	107.7
12,5°	132.2	131.0	128.1	127.9	124.7	122.4	119.8	117.5	113.7	110.2	107.5	105.1	101.6	99.0
15,0°	136.1	134.7	134.1	134.5	133.0	131.8	129.2	126.7	121.4	116.7	113.3	108.8	103.9	98.6
17,5°	142.2	142.2	143.0	145.7	145.5	144.9	142.0	138.6	131.8	125.5	120.8	114.5	107.7	100.2
20,0°	150.6	151.4	154.9	158.1	158.8	158.1	155.3	150.6	141.8	134.1	127.5	119.2	110.4	101.2
22,5°	159.4	162.8	168.3	171.8	172.8	171.0	166.9	161.0	150.0	140.8	132.2	121.6	110.6	100.2
25,0°	168.8	174.3	180.8	184.1	183.7	180.8	174.9	167.3	154.7	144.7	134.3	121.8	108.6	97.3
27,5°	180.2	185.9	191.0	192.0	190.2	186.5	180.2	170.4	154.9	142.8	132.0	120.2	103.5	91.0
30,0°	188.8	194.1	197.5	197.1	195.1	191.8	181.6	167.9	151.0	138.6	125.5	110.8	96.1	84.7
32,5°	198.5	202.6	204.7	207.7	201.8	188.6	176.5	163.2	147.3	135.7	125.1	104.5	88.4	79.4
35,0°	206.7	214.7	219.6	206.9	193.7	188.3	177.1	159.4	140.0	126.9	115.9	98.4	81.8	77.5
37,5°	217.5	227.5	211.6	202.2	199.0	181.0	164.3	149.0	133.9	122.2	109.4	89.4	77.1	66.1
40,0°	234.9	223.6	218.1	201.6	183.9	178.3	162.8	144.1	121.4	109.0	97.1	79.8	76.9	60.8
42,5°	235.9	228.7	210.0	199.0	191.4	167.9	150.0	136.7	118.4	103.3	87.7	76.5	68.2	58.2
45,0°	248.1	224.3	215.3	192.6	190.4	173.9	147.1	125.7	107.5	92.0	76.1	67.7	59.2	51.8
47,5°	241.4	231.0	211.4	191.6	175.5	160.2	143.5	110.4	89.4	80.0	65.9	64.7	51.2	48.0
50,0°	249.6	230.2	211.6	191.4	170.6	160.8	124.1	103.7	83.7	70.6	57.1	51.4	42.4	37.1
52,5°	248.3	232.8	197.9	184.3	201.4	155.9	119.0	99.8	73.7	56.9	48.8	43.5	40.6	31.8
55,0°	245.9	221.2	202.4	211.4	207.9	151.4	113.7	86.7	63.9	51.0	44.5	38.6	39.8	34.1
57,5°	251.4	216.7	208.5	242.8	194.7	141.6	100.8	70.0	54.9	44.3	36.1	31.4	33.5	30.0
60,0°	242.6	225.3	226.1	219.2	147.9	130.2	90.6	61.6	43.7	36.9	30.6	29.2	25.7	25.3
62,5°	185.9	216.5	231.6	178.6	123.0	96.9	90.4	51.2	37.8	31.8	25.9	23.7	21.6	22.2
65,0°	162.2	172.8	193.0	177.7	133.0	90.8	78.4	45.9	33.7	27.5	23.5	21.4	20.2	19.6
67,5°	110.6	127.5	127.1	112.6	86.9	63.7	51.2	34.9	29.2	23.5	21.2	20.0	19.2	18.6
70,0°	69.2	79.2	75.3	71.6	50.2	43.1	32.9	27.3	25.1	20.4	19.2	18.6	18.0	17.5
72,5°	55.3	49.8	49.6	34.9	29.6	26.5	25.1	23.1	21.6	17.5	16.7	16.3	15.9	15.7
75,0°	39.2	36.7	29.6	25.3	23.3	21.4	20.8	17.3	15.9	15.1	14.5	14.1	13.9	13.5
77,5°	25.5	23.5	22.9	19.8	18.4	16.9	15.7	13.7	12.7	12.0	11.6	11.4	11.2	11.0
80,0°	18.2	17.1	16.9	14.9	13.9	12.9	11.4	10.6	9.8	9.4	9.0	8.8	8.6	8.6
82,5°	12.7	12.0	11.8	10.8	10.0	9.2	8.6	7.8	7.3	6.9	6.7	6.7	6.5	6.3
85,0°	8.0	7.8	7.3	7.1	6.7	6.3	5.9	5.5	5.1	4.9	4.7	4.7	4.5	4.5
87,5°	3.5	3.5	3.3	3.3	3.1	2.9	2.7	2.7	2.4	2.4	2.4	2.4	2.4	2.4
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
Table of values for luminous intensities		Maximum luminous intensity
siteco		

C-planes	210°	215°	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°	275°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	170.6	172.8	175.3	178.3	180.4	180.4	179.6	179.6	178.8	177.9	176.7	177.1	179.6	182.6
5,0°	138.4	140.0	142.8	148.4	156.1	165.1	167.7	168.1	169.0	169.2	170.2	172.4	174.5	176.7
7,5°	120.2	121.2	124.9	125.3	126.3	129.6	140.4	151.8	159.8	168.1	173.0	173.7	174.3	174.7
10,0°	108.8	109.6	112.6	116.9	120.8	122.6	124.9	130.6	147.7	156.3	159.6	165.1	170.2	168.8
12,5°	96.7	99.2	100.4	100.4	102.8	106.7	116.5	120.6	129.4	137.7	141.2	147.7	152.6	157.3
15,0°	92.6	88.2	85.9	85.1	85.9	87.7	90.2	103.3	110.4	119.6	124.9	128.8	139.8	143.2
17,5°	93.5	86.5	80.4	76.7	75.3	75.7	75.7	78.8	88.6	100.6	111.8	121.2	124.9	126.7
20,0°	92.4	84.7	77.7	72.4	69.0	67.7	69.4	72.6	77.5	84.3	94.3	111.0	119.0	118.8
22,5°	90.8	81.0	73.7	68.2	65.3	65.3	65.7	69.0	70.6	79.2	90.2	99.0	112.8	118.6
25,0°	86.9	77.3	69.2	63.7	62.0	62.6	65.3	69.4	71.6	76.1	86.7	97.1	107.1	116.3
27,5°	82.0	73.1	65.1	59.8	57.1	61.2	67.3	70.0	71.8	77.5	88.4	97.3	108.4	117.1
30,0°	78.4	71.8	61.4	57.5	56.9	59.8	66.5	71.0	73.5	77.7	89.6	100.4	107.5	114.3
32,5°	70.8	63.9	59.2	58.2	58.2	59.8	63.5	68.0	72.8	76.3	92.8	103.1	105.9	108.2
35,0°	64.5	58.2	57.5	58.8	60.4	60.4	63.5	63.9	71.6	75.9	86.7	100.8	105.9	104.5
37,5°	56.5	53.7	57.7	63.5	61.4	60.8	62.4	64.5	72.0	78.8	82.4	95.5	100.8	97.9
40,0°	55.3	53.3	58.4	60.8	58.0	58.2	61.8	66.7	73.3	77.3	81.4	90.8	95.9	84.9
42,5°	56.9	64.3	62.4	58.4	57.1	58.8	61.4	65.3	71.6	70.8	78.6	87.3	91.4	79.6
45,0°	52.2	68.4	68.0	58.4	55.7	58.0	59.0	59.6	65.1	65.9	71.0	80.4	82.8	73.3
47,5°	50.0	57.5	68.2	68.4	58.2	48.6	53.1	56.3	58.8	61.4	65.3	74.7	73.9	70.0
50,0°	42.9	48.4	61.0	81.4	66.3	52.4	49.6	52.2	55.1	59.4	58.6	65.7	68.4	63.3
52,5°	34.9	40.6	48.4	66.1	74.9	61.0	47.3	48.4	50.6	53.3	51.4	57.1	58.8	55.5
55,0°	31.2	31.6	40.4	56.3	65.9	71.4	55.1	44.1	45.3	46.5	44.7	52.2	50.6	50.8
57,5°	28.0	29.4	34.7	41.4	49.0	51.8	46.7	40.4	39.2	39.8	39.8	44.1	45.1	46.9
60,0°	26.5	29.2	30.0	32.0	32.4	33.5	35.5	33.9	34.1	34.1	34.7	39.0	40.8	41.0
62,5°	23.9	22.9	23.7	23.3	25.3	25.1	26.5	29.2	28.8	29.2	30.2	34.9	35.1	34.5
65,0°	21.4	19.8	20.2	21.4	20.8	22.2	23.5	24.3	24.3	26.3	26.7	28.4	30.2	30.2
67,5°	22.0	17.8	17.8	18.6	19.2	19.0	21.0	21.2	22.0	22.7	23.5	23.7	25.3	25.3
70,0°	19.8	16.5	15.9	15.9	16.1	16.7	17.5	18.4	19.2	19.6	19.4	20.2	21.0	21.8
72,5°	15.9	14.9	14.3	14.1	14.1	14.5	14.7	15.1	16.1	16.3	16.1	16.3	17.1	18.0
75,0°	13.3	12.9	12.4	12.2	12.2	12.2	12.4	12.4	13.3	13.3	13.1	13.3	13.5	14.1
77,5°	10.8	10.6	10.2	10.0	10.0	10.0	10.0	10.0	10.6	10.6	10.0	10.2	10.4	10.8
80,0°	8.4	8.2	8.0	7.8	7.6	7.6	7.6	7.6	8.0	7.8	7.1	6.7	7.3	8.0
82,5°	6.1	6.1	5.9	5.7	5.7	5.5	5.3	5.3	5.3	5.7	4.5	3.5	4.7	5.5
85,0°	4.5	4.3	4.1	4.1	3.9	3.7	3.5	3.3	3.3	3.1	2.9	2.4	2.9	2.9
87,5°	2.4	2.4	2.4	2.2	2.2	2.2	2.0	1.8	1.6	1.4	1.2	1.0	0.8	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
Table of values for luminous intensities		Maximum luminous intensity

sITeco

C-planes	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°	330°	335°	340°	345°
γ	Luminous intensity in cd/klm													
0,0°	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4	200.4
2,5°	184.5	186.5	189.2	192.8	196.3	199.4	201.4	204.5	206.3	209.0	210.8	215.1	219.2	222.0
5,0°	177.5	179.0	179.8	181.4	184.5	190.0	197.3	205.1	213.6	220.8	223.4	227.3	231.8	235.5
7,5°	169.8	173.2	179.8	185.7	188.3	190.0	196.3	211.6	219.0	225.3	230.6	238.1	243.0	249.4
10,0°	170.4	169.8	170.2	171.2	178.3	189.8	198.8	218.1	226.7	227.9	232.4	234.9	241.0	251.4
12,5°	156.1	158.3	158.6	163.7	164.7	170.6	179.8	202.0	206.9	218.1	220.8	226.1	234.1	244.3
15,0°	143.9	146.5	148.8	149.6	149.0	159.6	165.1	184.5	196.9	203.9	209.4	219.2	237.5	262.4
17,5°	129.4	135.7	139.2	141.8	146.9	155.1	172.6	179.6	182.0	191.8	205.9	222.0	241.6	262.4
20,0°	121.4	126.3	134.9	142.4	151.6	161.2	168.8	171.6	176.9	184.9	199.2	213.6	231.2	269.8
22,5°	123.3	131.0	134.3	141.2	149.4	152.6	156.5	156.7	161.4	175.7	190.8	212.2	236.3	267.9
25,0°	124.5	132.4	127.7	132.6	136.1	134.1	138.4	143.7	152.6	165.9	182.8	200.8	224.7	259.8
27,5°	118.4	122.6	119.2	119.4	119.8	123.9	129.6	136.7	145.1	158.8	177.3	203.9	231.8	262.4
30,0°	114.7	112.2	116.9	114.5	111.0	115.9	122.8	130.8	142.8	154.3	172.8	200.6	227.3	260.6
32,5°	106.7	100.8	106.1	105.9	103.1	107.3	115.1	125.3	135.5	150.8	173.7	197.9	229.2	259.8
35,0°	95.5	92.4	97.3	94.3	94.7	98.4	105.5	113.5	127.5	138.8	165.1	195.5	221.0	254.9
37,5°	84.5	84.1	87.1	85.7	85.7	87.9	94.5	105.3	116.9	127.9	150.6	194.3	232.0	262.4
40,0°	77.5	76.9	79.8	78.2	76.3	78.2	84.7	93.9	105.9	116.7	135.3	186.3	226.9	262.6
42,5°	72.6	70.8	71.4	71.2	70.2	71.0	76.3	84.1	96.5	109.8	129.0	168.1	231.8	274.3
45,0°	69.4	66.3	65.3	64.9	64.9	66.1	70.2	76.9	90.0	102.0	121.2	144.1	221.8	288.9
47,5°	67.7	62.0	60.2	60.2	60.0	61.6	65.9	72.6	82.6	97.3	112.0	127.5	203.9	287.3
50,0°	61.8	56.9	55.3	54.5	55.3	57.1	61.4	66.3	76.1	89.4	100.2	114.5	180.6	268.9
52,5°	56.9	51.8	50.2	49.4	50.0	52.4	56.1	60.8	67.5	79.0	89.6	101.0	144.5	255.7
55,0°	49.4	46.9	45.3	44.7	45.3	47.7	51.0	54.5	59.6	68.2	77.3	88.4	111.8	237.3
57,5°	43.7	41.6	40.6	40.4	40.8	43.3	45.9	48.8	51.8	57.3	64.9	74.5	108.2	196.1
60,0°	38.6	36.9	36.3	36.1	36.7	38.4	40.6	42.4	45.3	48.4	56.1	64.1	89.0	136.9
62,5°	33.3	32.4	32.0	32.2	32.6	34.1	35.7	37.1	40.0	41.4	47.1	54.5	70.6	106.5
65,0°	29.0	28.6	28.2	28.6	29.2	30.0	31.2	32.4	33.3	34.7	40.2	50.2	64.9	86.1
67,5°	24.9	24.5	24.3	24.5	25.9	26.3	27.3	28.0	28.6	29.4	33.5	43.7	62.9	81.0
70,0°	21.2	21.0	20.8	21.0	22.4	22.9	23.3	23.7	24.1	24.7	27.8	34.7	52.4	72.2
72,5°	17.3	17.3	17.5	18.2	19.2	19.8	19.6	19.4	19.8	20.2	23.3	28.2	37.5	61.8
75,0°	14.1	14.3	14.7	15.1	16.3	16.5	15.9	15.5	15.7	16.5	17.8	22.9	25.3	48.4
77,5°	11.2	11.2	11.4	12.0	13.3	13.3	12.9	12.0	12.0	12.7	13.3	16.7	20.0	33.3
80,0°	8.4	8.4	8.6	9.2	9.8	10.0	9.4	8.8	8.8	9.2	9.6	10.4	15.9	21.6
82,5°	5.7	5.5	5.7	6.3	6.7	6.3	6.1	5.9	5.9	6.3	6.5	6.9	7.6	8.4
85,0°	2.7	3.3	3.3	3.3	3.3	3.3	3.3	3.5	3.5	3.7	3.9	4.3	4.7	5.1
87,5°	1.0	1.2	1.2	1.4	1.4	1.4	1.6	1.6	1.6	1.8	2.0	2.2	2.7	3.1
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
--	--	-------------------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
---	-----------------------------------	---------------

C-planes	350°	355°	Phi-zone	Total Phi-zone
Luminous intensity in cd / Luminous flux in lm/klm				
0,0°	200.4	200.4	0.3	0.3
2,5°	224.3	227.3	2.4	2.7
5,0°	241.6	251.2	4.8	7.5
7,5°	260.4	269.8	7.3	14.8
10,0°	263.6	273.8	9.9	24.7
12,5°	258.5	272.0	12.2	36.9
15,0°	281.2	295.7	14.9	51.8
17,5°	277.9	298.3	17.6	69.4
20,0°	299.6	312.6	20.6	90.0
22,5°	287.5	323.2	23.7	113.6
25,0°	300.6	328.3	27.0	140.6
27,5°	306.3	358.5	30.9	171.5
30,0°	304.0	357.3	33.9	205.4
32,5°	309.4	353.6	36.8	242.2
35,0°	303.6	339.8	38.9	281.1
37,5°	333.4	361.2	41.1	322.3
40,0°	346.7	366.5	43.3	365.6
42,5°	343.8	386.5	45.3	410.9
45,0°	333.6	405.9	46.9	457.9
47,5°	339.1	405.9	47.9	505.7
50,0°	336.7	398.9	48.6	554.3
52,5°	318.1	401.2	49.2	603.5
55,0°	303.2	390.0	49.8	653.4
57,5°	257.5	352.8	49.8	703.1
60,0°	219.0	302.4	48.9	752.0
62,5°	177.1	244.1	46.3	798.4
65,0°	140.0	193.2	43.5	841.8
67,5°	108.4	159.0	39.4	881.2
70,0°	93.5	158.6	35.2	916.3
72,5°	86.1	162.2	29.9	946.3
75,0°	57.7	90.0	23.8	970.0
77,5°	41.6	64.3	15.3	985.4
80,0°	24.1	29.0	7.8	993.2
82,5°	9.6	11.0	3.8	997.0
85,0°	5.9	6.7	2.0	999.1
87,5°	3.5	4.1	0.9	1000.0
90,0°	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3F21F08ME EAN: 4058352559253	LP number 58932_190
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	12740	124.7	132.2	128.4
95	241	252	12088	117.0	124.0	120.5
90	229	250	11486	110.0	116.6	113.3
85	216	248	10834	102.7	108.8	105.8
80	203	246	10182	95.6	101.3	98.4
75	190	243	9530	88.7	93.9	91.3
70	178	241	8928	82.4	87.3	84.8
65	165	238	8276	75.8	80.2	78.0
60	152	235	7624	69.3	73.3	71.3
55	140	232	7022	63.4	67.1	65.2
50	127	229	6370	57.1	60.4	58.8
45	114	225	5718	50.9	53.9	52.4
40	102	221	5116	45.3	47.9	46.6
35	89	216	4464	39.3	41.6	40.4
30	76	210	3812	33.5	35.4	34.4
25	63	203	3160	27.8	29.3	28.6
20	51	195	2558	22.6	23.8	23.2
15	38	184	1906	17.1	18.0	17.6
13	33	179	1655	15.1	15.8	15.4