


Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M31V08NB EAN: 4058352924303	LP number 59158_232
	Version post-top or side-entry mounting, Smart Interface up Optic asymmetric, wide distribution (ST1.0a G), Back Light Control (BLC) Cover toughened safety glass Lamps LED 3000 K CRI ≥ 70 Controlgear EVG SITECO iQ - Smart Interface Rated values Net luminous flux = 18970 lm Power consumption = 136.6 W Luminous efficacy = 138.9 lm/W	serial documentation 11.08.2023



Luminous intensity in cd/klm C180-0 C195-15 C200-20 C270-90 **Imax: 530 cd/klm**

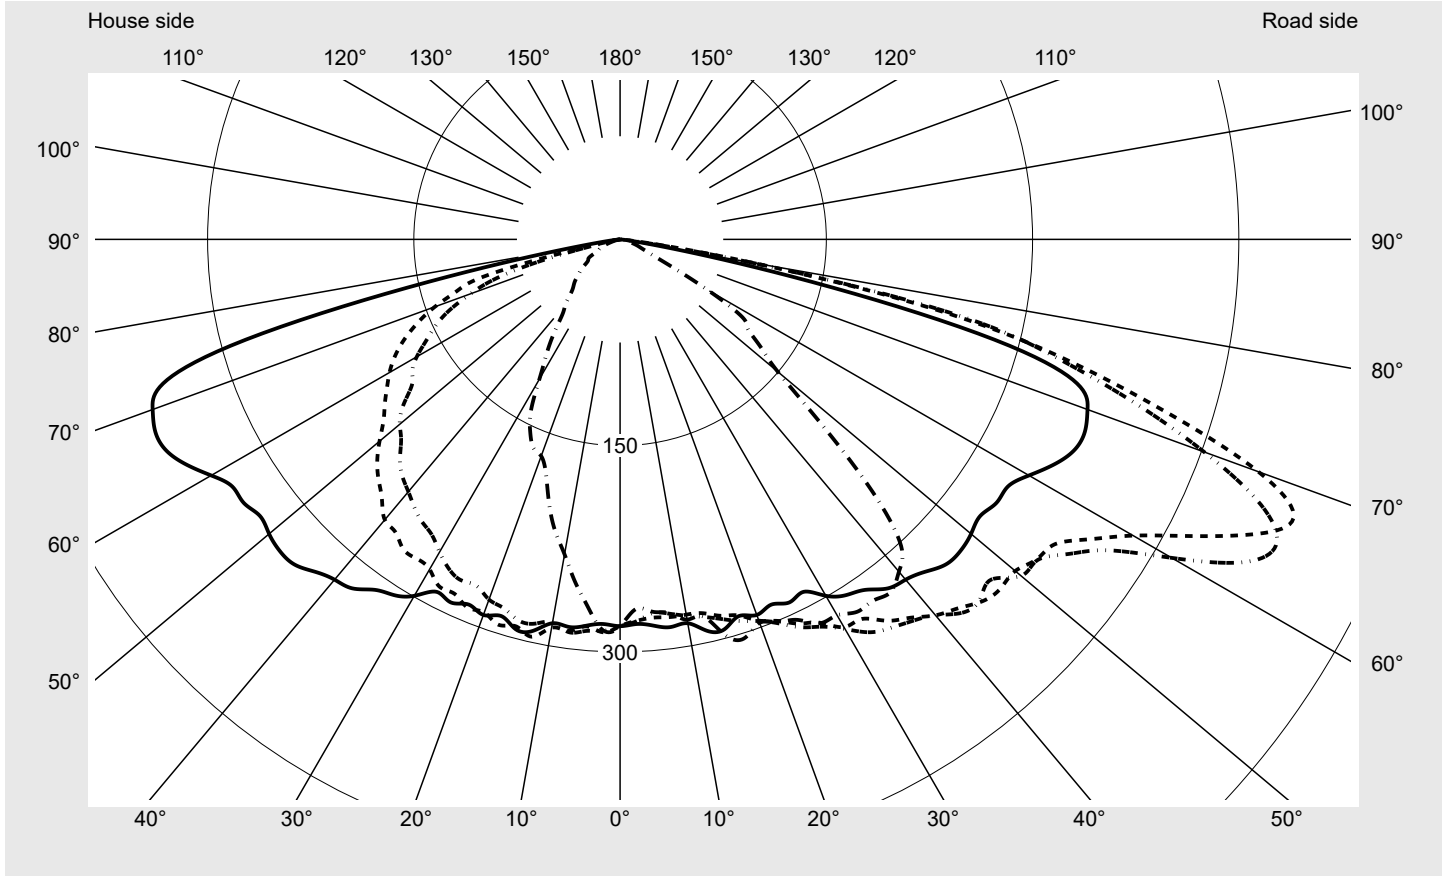

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2	
Class:	G4
Imax 70°	494.0
Imax 80°	97.3
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions
DIN EN 13032 and DIN 5032


Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M31V08NB EAN: 4058352924303	LP number 59158_232
---	--	--------------------------------------

Envelope curve in cd/klm

KMK 67.5°
KMK 65°
KMK 62.5°
KMK 60°

siteco

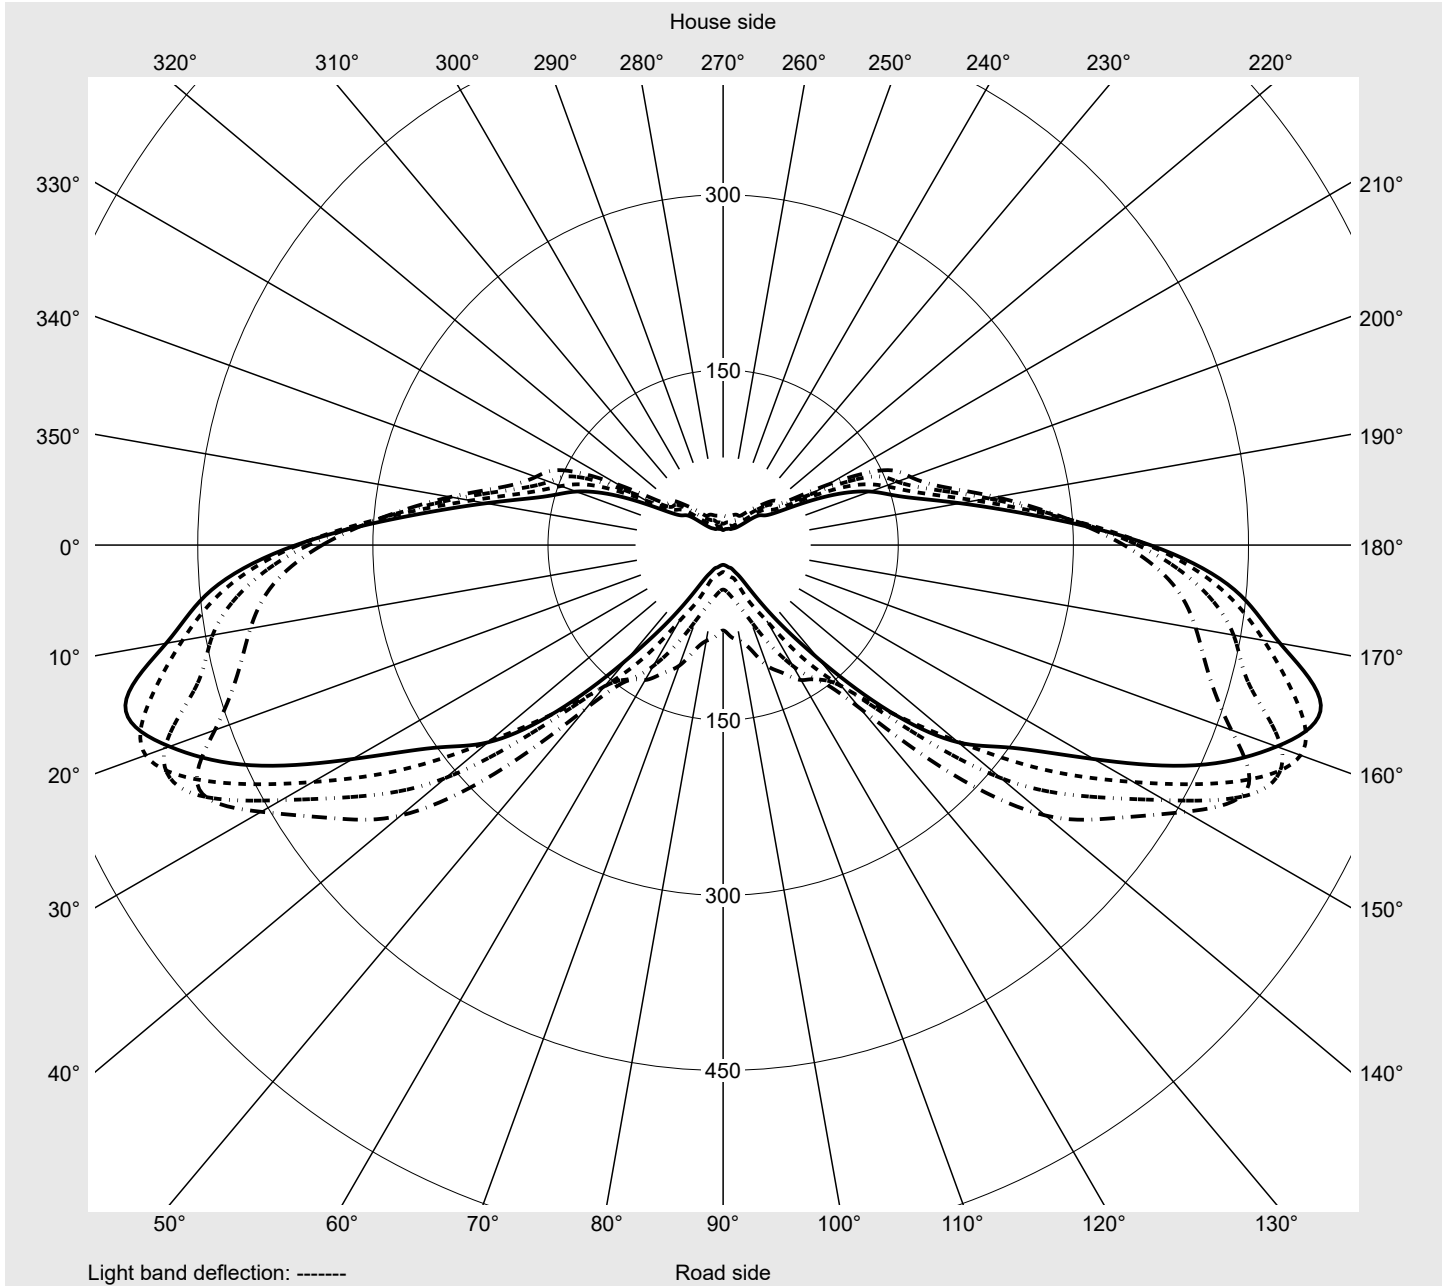

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M31V08NB EAN: 4058352924303	LP number 59158_232
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3
2,5°	280.0	279.5	279.2	277.7	277.9	277.2	277.5	277.2	275.6	274.9	274.1	272.2	271.9
5,0°	282.0	279.0	278.0	276.1	272.9	271.2	268.2	269.1	269.6	270.1	269.8	269.1	270.9
7,5°	284.3	282.5	280.2	277.0	274.6	269.8	270.2	271.2	274.2	276.9	275.3	277.1	278.7
10,0°	283.5	278.8	278.9	277.1	277.9	275.3	275.0	274.3	277.9	276.8	278.3	280.6	285.6
12,5°	291.5	283.0	278.6	278.5	281.2	284.6	289.1	289.5	285.3	284.2	286.1	285.7	287.3
15,0°	293.5	287.3	282.6	283.4	285.9	287.5	291.2	291.6	289.1	290.7	289.2	288.4	292.5
17,5°	287.2	283.0	284.7	286.8	291.0	295.5	294.3	295.6	291.9	292.9	293.3	291.2	291.8
20,0°	290.7	291.7	292.2	295.1	295.4	298.3	298.7	298.0	297.8	295.7	296.5	296.5	299.4
22,5°	287.5	290.7	295.2	300.3	302.4	303.2	304.2	303.3	305.0	303.4	306.4	303.6	308.2
25,0°	291.3	293.7	300.6	308.4	311.2	310.2	305.1	310.6	315.6	314.0	311.9	310.8	313.1
27,5°	289.0	299.0	309.0	314.3	317.6	319.7	315.4	321.2	315.6	313.1	310.8	312.4	317.4
30,0°	299.3	307.0	319.6	325.6	327.2	326.9	321.7	323.1	317.8	323.1	319.9	314.6	319.2
32,5°	306.6	316.1	327.3	327.3	338.8	336.8	328.0	332.2	327.0	328.7	324.9	323.3	321.4
35,0°	311.1	323.0	331.4	338.6	344.6	341.3	340.8	340.2	334.2	335.6	333.1	338.0	343.9
37,5°	319.9	329.0	340.9	346.8	349.7	351.4	343.0	340.3	343.7	357.2	349.0	349.3	350.7
40,0°	323.1	341.3	350.9	356.9	356.9	355.3	348.8	348.2	355.8	358.7	355.6	359.4	347.1
42,5°	328.0	352.6	360.8	363.9	368.3	358.2	356.2	364.4	370.1	370.9	367.6	359.1	344.9
45,0°	334.6	357.9	364.8	372.3	370.2	361.6	366.2	373.8	385.7	385.3	368.9	360.6	349.9
47,5°	335.6	361.2	371.9	375.5	366.2	374.6	379.7	390.8	395.5	392.9	373.7	358.5	330.6
50,0°	333.2	358.6	375.4	375.2	380.7	383.0	391.4	407.7	423.6	398.5	367.7	329.8	282.7
52,5°	330.3	358.8	373.2	382.1	382.9	396.7	409.7	434.6	441.4	401.3	350.0	291.1	233.7
55,0°	334.1	363.5	378.1	386.3	398.8	423.8	441.5	441.1	420.3	385.7	309.2	234.7	184.4
57,5°	334.5	363.0	386.9	405.8	420.8	451.3	460.8	432.9	394.6	333.1	244.9	182.0	145.6
60,0°	343.4	386.8	411.2	430.9	463.3	495.1	456.9	407.8	360.3	277.0	182.7	141.5	133.5
62,5°	355.2	409.6	444.0	467.2	508.8	502.5	436.9	374.5	310.3	220.8	158.1	140.1	119.6
65,0°	363.9	427.8	470.2	507.6	526.4	480.2	405.9	335.1	261.4	202.9	157.6	116.6	75.7
67,5°	365.9	439.7	484.4	530.1	504.6	446.2	366.6	302.8	262.8	201.3	127.5	74.5	38.3
70,0°	361.8	427.3	480.7	494.0	452.1	390.2	353.2	342.1	271.3	160.9	82.6	40.8	21.3
72,5°	348.5	390.9	432.9	414.9	389.5	361.2	397.1	367.5	221.1	100.7	40.3	20.0	14.8
75,0°	281.9	295.0	323.9	333.1	324.9	367.7	367.8	233.4	109.1	39.6	15.4	12.6	11.4
77,5°	143.0	161.3	198.8	233.5	244.3	250.6	175.4	81.5	27.2	12.1	10.0	8.7	7.3
80,0°	40.2	63.0	91.1	97.3	95.2	86.7	27.8	12.7	6.5	6.7	7.5	5.6	4.2
82,5°	8.8	13.8	20.6	21.5	16.3	17.5	5.0	3.3	2.6	3.3	3.9	2.7	2.0
85,0°	1.2	1.3	1.5	1.6	1.4	1.7	1.3	1.2	1.1	0.9	1.1	0.8	0.7
87,5°	0.3	0.3	0.4	0.4	0.4	0.4	0.4	0.3	0.3	0.3	0.3	0.3	0.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M31V08NB EAN: 4058352924303	LP number 59158_232
Table of values for luminous intensities		Maximum luminous intensity

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3
2,5°	272.1	269.9	267.0	268.1	268.5	269.0	281.4	284.1	286.0	285.0	286.1	285.9	287.0
5,0°	269.3	272.2	271.3	271.9	270.8	271.9	283.4	282.6	282.5	285.9	285.5	283.5	281.1
7,5°	280.9	281.1	280.2	277.5	274.1	274.1	286.0	287.6	287.0	288.0	286.8	283.0	277.5
10,0°	287.1	285.1	283.0	280.7	279.3	280.8	287.8	290.8	286.8	282.7	279.5	273.9	268.3
12,5°	285.5	284.2	286.0	288.9	286.6	281.0	295.5	295.8	296.0	286.2	277.7	269.6	261.9
15,0°	292.0	290.2	289.8	292.0	297.5	298.6	293.5	294.0	291.5	286.7	277.3	264.8	251.5
17,5°	294.8	294.5	298.3	293.0	297.4	303.5	292.3	293.3	293.9	281.3	267.6	258.9	240.9
20,0°	299.0	299.5	304.2	296.9	296.7	296.7	294.8	297.3	288.7	278.8	264.7	247.9	234.6
22,5°	307.0	303.9	307.2	305.2	303.5	301.1	292.3	292.7	289.8	272.7	253.1	235.2	224.2
25,0°	308.5	307.0	306.5	307.6	304.1	305.3	288.3	287.7	284.5	273.6	248.9	229.8	214.2
27,5°	309.7	310.9	309.1	310.5	312.1	314.7	284.8	292.0	284.6	269.9	246.9	218.6	204.8
30,0°	318.8	313.0	316.5	319.3	321.1	315.6	288.4	288.0	277.1	262.6	236.5	216.2	195.1
32,5°	328.3	327.3	324.1	328.0	321.7	321.1	292.1	283.3	275.4	254.8	232.4	204.0	187.3
35,0°	333.0	330.3	327.3	330.3	321.0	320.8	293.4	280.5	274.9	250.9	222.6	198.5	180.2
37,5°	347.6	338.1	337.0	331.1	320.5	323.3	300.7	280.1	268.4	245.7	215.7	189.0	173.6
40,0°	336.7	326.6	325.9	326.6	319.5	315.5	299.6	275.7	266.2	239.6	208.1	184.4	173.4
42,5°	338.1	330.2	318.5	318.1	304.4	302.6	299.3	268.9	256.4	234.2	201.3	180.8	167.8
45,0°	331.0	306.8	290.4	268.8	256.0	259.8	300.8	268.3	248.2	226.4	193.0	177.1	163.8
47,5°	292.1	250.6	224.1	205.0	194.0	197.9	301.3	257.8	239.6	216.0	186.1	176.6	150.4
50,0°	230.3	192.7	175.9	164.2	151.9	149.7	291.8	255.7	228.4	209.2	179.8	170.6	134.0
52,5°	178.9	156.0	144.3	133.1	130.3	129.2	290.2	246.4	216.9	199.0	174.2	152.8	114.9
55,0°	145.4	130.5	117.0	116.4	114.2	113.5	290.0	243.5	208.9	184.8	172.7	133.8	95.4
57,5°	121.3	117.8	115.4	113.0	105.4	105.7	290.5	241.2	201.0	179.3	161.5	119.5	77.5
60,0°	120.8	110.0	93.0	83.4	79.0	73.2	288.7	237.1	193.6	170.7	151.6	103.2	63.9
62,5°	93.2	69.2	54.5	45.9	40.4	38.1	287.6	230.5	184.8	158.7	138.3	87.8	57.4
65,0°	54.2	33.9	28.7	26.2	24.3	23.1	285.3	219.6	173.6	147.8	120.0	76.2	53.1
67,5°	26.5	21.4	19.9	18.4	17.4	16.9	275.2	206.3	159.8	134.0	99.6	61.1	44.4
70,0°	17.3	16.2	15.1	13.9	13.6	13.6	271.2	190.7	143.4	115.8	76.3	41.8	37.8
72,5°	13.4	12.4	11.4	10.8	10.3	10.1	262.2	181.5	124.0	94.7	40.9	29.8	31.2
75,0°	9.9	9.0	7.8	7.7	7.0	7.0	234.3	162.3	97.6	56.0	20.7	21.7	24.4
77,5°	6.2	5.7	5.2	5.0	4.7	4.7	137.1	75.6	26.2	11.1	9.8	13.4	15.8
80,0°	3.7	3.3	3.1	3.0	2.9	2.6	42.3	12.7	5.3	5.7	5.5	8.1	8.7
82,5°	1.7	1.8	1.5	1.5	1.5	1.4	7.6	3.1	2.7	2.5	2.5	3.6	4.0
85,0°	0.7	0.7	0.6	0.6	0.5	0.6	1.3	1.2	1.1	1.1	1.0	1.1	1.0
87,5°	0.2	0.2	0.1	0.1	0.1	0.1	0.3	0.3	0.2	0.3	0.2	0.2	0.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M31V08NB EAN: 4058352924303	LP number 59158_232
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	281.3	0.4	0.4
2,5°	286.8	285.3	284.3	284.7	284.2	283.3	284.6	283.3	283.5	283.7	284.6	3.3	3.8
5,0°	278.6	276.1	273.1	270.4	269.6	267.2	264.9	267.7	269.2	270.0	268.4	6.5	10.3
7,5°	270.7	265.2	261.6	259.4	254.7	252.2	249.7	249.3	251.4	252.1	251.1	9.8	20.1
10,0°	262.4	258.2	251.3	247.1	241.7	240.5	235.9	232.2	229.7	232.0	232.6	12.8	32.9
12,5°	253.0	248.1	241.3	233.4	227.8	225.9	222.1	221.1	217.0	216.2	217.6	15.9	48.8
15,0°	243.5	238.9	227.1	220.2	215.6	207.2	202.8	202.4	199.4	197.5	199.3	18.9	67.7
17,5°	230.7	224.5	216.6	207.3	197.9	192.6	186.1	186.7	184.9	178.1	179.1	21.6	89.3
20,0°	224.7	212.9	200.9	190.3	179.3	178.3	173.5	168.8	172.8	171.2	167.7	24.4	113.7
22,5°	214.9	197.6	181.9	175.8	167.5	170.4	169.4	167.1	165.9	164.7	164.5	27.1	140.8
25,0°	197.9	180.7	172.8	169.2	165.1	160.8	159.9	160.1	158.1	157.3	154.6	29.8	170.6
27,5°	187.3	175.1	165.8	162.0	159.3	153.5	151.8	145.8	145.0	142.8	140.4	32.4	203.0
30,0°	177.2	171.0	166.6	158.9	151.2	143.8	132.7	128.8	124.3	120.6	117.3	35.0	238.0
32,5°	172.7	165.1	158.2	150.4	138.9	130.3	117.7	112.6	105.8	101.8	100.1	37.5	275.5
35,0°	173.7	161.0	152.4	138.3	123.5	111.2	100.8	90.8	89.5	87.5	84.7	39.9	315.4
37,5°	166.8	154.7	137.1	122.9	105.2	92.7	86.3	81.1	76.6	73.0	69.0	42.2	357.6
40,0°	159.6	145.5	123.8	107.7	92.7	82.7	77.8	70.9	66.2	62.7	61.7	44.1	401.8
42,5°	150.3	129.1	106.2	93.0	85.0	75.6	70.1	65.3	59.6	54.9	52.8	46.0	447.8
45,0°	137.4	114.1	93.1	85.0	75.9	66.1	59.6	54.8	50.9	50.0	47.9	47.0	494.8
47,5°	124.3	96.6	84.4	75.5	64.4	54.9	48.4	46.6	45.4	44.6	44.2	46.6	541.4
50,0°	105.0	86.9	74.5	66.3	55.3	47.4	42.9	41.6	41.5	39.7	39.3	46.0	587.4
52,5°	89.2	76.5	63.7	53.4	45.8	41.0	37.8	37.7	35.4	34.8	35.4	45.4	632.9
55,0°	75.3	68.1	53.2	44.9	38.3	35.9	34.0	34.1	32.0	31.4	29.8	44.7	677.6
57,5°	64.5	56.8	45.7	39.7	34.2	32.8	30.9	30.2	29.1	28.8	27.4	44.0	721.6
60,0°	59.0	50.3	41.2	33.9	28.9	28.5	27.6	26.2	25.5	24.9	25.3	43.4	765.0
62,5°	53.6	44.6	34.6	28.4	25.6	23.6	22.6	20.3	19.8	18.9	18.3	42.0	807.0
65,0°	47.4	37.5	28.0	23.1	19.9	17.9	17.8	16.5	16.2	16.0	16.2	40.3	847.3
67,5°	39.3	28.4	21.3	17.9	16.3	15.1	14.9	14.3	14.0	13.4	12.8	38.3	885.6
70,0°	31.7	19.8	16.1	15.1	13.5	11.7	11.5	11.5	11.1	11.0	10.7	35.8	921.3
72,5°	24.4	15.2	12.7	11.7	10.5	9.3	8.6	8.1	7.7	7.5	7.3	32.3	953.6
75,0°	17.7	11.9	10.0	8.9	7.9	6.4	5.3	5.0	5.2	5.0	4.8	25.5	979.1
77,5°	11.6	7.9	6.4	5.8	4.8	3.7	3.2	3.1	2.9	2.5	2.7	14.3	993.4
80,0°	6.9	4.8	3.4	2.9	2.3	1.7	1.3	1.2	0.9	1.0	1.1	5.1	998.5
82,5°	3.1	2.0	1.3	1.1	0.9	0.4	0.4	0.4	0.4	0.4	0.3	1.3	999.7
85,0°	0.8	0.7	0.4	0.4	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.2	999.9
87,5°	0.1	0.1	0.1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M31V08NB EAN: 4058352924303	LP number 59158_232
--	--	-------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	18970	136.6	143.6	140.1
95	241	252	17999	128.0	134.4	131.2
90	229	250	17103	120.3	126.2	123.2
85	216	248	16132	112.0	117.6	114.8
80	203	246	15161	104.0	109.1	106.6
75	190	243	14190	96.3	101.0	98.6
70	178	241	13294	89.3	93.7	91.5
65	165	238	12323	82.0	86.0	84.0
60	152	235	11352	74.8	78.5	76.6
55	140	232	10456	68.3	71.6	69.9
50	127	229	9485	61.4	64.3	62.8
45	114	225	8514	54.6	57.3	56.0
40	102	221	7618	48.5	50.8	49.6
35	89	216	6647	42.0	44.0	43.0
30	76	210	5676	35.7	37.3	36.5
25	63	203	4705	29.6	30.8	30.2
20	51	195	3809	23.9	25.0	24.4
15	38	184	2838	18.1	18.9	18.5
10	25	169	1867	12.3	12.8	12.6

Dimming levels table	environmental temperature: 5°C
-----------------------------	--------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	18970	133.6	138.1	135.8
95	241	252	17999	125.4	129.6	127.5
90	229	250	17102	118.0	122.0	120.0
85	216	248	16132	110.2	113.9	112.0
80	203	246	15161	102.6	106.0	104.3
75	191	244	14265	95.7	98.9	97.3
70	178	241	13294	88.5	91.3	89.9
65	165	238	12323	81.3	83.9	82.6
60	152	235	11352	74.3	76.7	75.5
55	140	232	10456	67.9	70.1	69.0
50	127	229	9485	61.2	63.1	62.2
45	114	225	8514	54.5	56.2	55.4
40	102	221	7618	48.5	50.1	49.3
35	89	216	6647	42.1	43.4	42.8
30	76	210	5676	35.7	36.9	36.3
25	64	204	4780	30.0	31.0	30.5
20	51	195	3809	24.0	24.8	24.4
15	38	184	2838	18.2	18.7	18.4
10	26	171	1942	12.8	13.2	13.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M31V08NB EAN: 4058352924303	LP number 59158_232
--	--	-------------------------------

Dimming levels table	environmental temperature: 15°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	18970	134.8	140.4	137.6
95	241	252	17999	126.4	131.6	129.0
90	229	250	17102	118.8	123.7	121.2
85	216	248	16131	110.9	115.4	113.2
80	203	246	15161	103.1	107.3	105.2
75	191	244	14264	96.2	100.1	98.2
70	178	241	13294	88.8	92.3	90.6
65	165	238	12323	81.5	84.8	83.2
60	152	235	11352	74.5	77.4	76.0
55	140	232	10456	68.0	70.7	69.4
50	127	229	9485	61.2	63.6	62.4
45	114	225	8514	54.5	56.7	55.6
40	102	221	7618	48.5	50.4	49.4
35	89	216	6647	41.9	43.6	42.8
30	76	210	5676	35.7	37.0	36.4
25	64	204	4780	30.0	31.1	30.6
20	51	195	3809	24.0	24.9	24.4
15	38	184	2838	18.1	18.7	18.4
10	26	171	1942	12.8	13.2	13.0

Photometric test report

Family Streetlight 21 midi LED	Order number: 5XE3M31V08NB EAN: 4058352924303	LP number 59158_232
--	--	--------------------------------------

Luminousfluxs table **sITeco**

Temperature °C	Luminous flux lm	Power consumption W
25.0	18970.0	136.6
5.0	18970.0	133.6
15.0	18970.0	134.8