


Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E5K1A EAN: 4058352854136	LP number 59305_15
	Version mounting bracket Optic symmetric distribution RS7 Cover toughened safety glass Lamps LED 4000 K CRI ≥ 80 Controlgear ECG SITECO iQ Rated values Net luminous flux = 25160 lm Power consumption = 208.1 W Luminous efficacy = 120.9 lm/W	serial documentation 22.08.2023





Luminous intensity in cd/klm C180-0 C185-5 C270-90 **Imax: 12348 cd/klm**

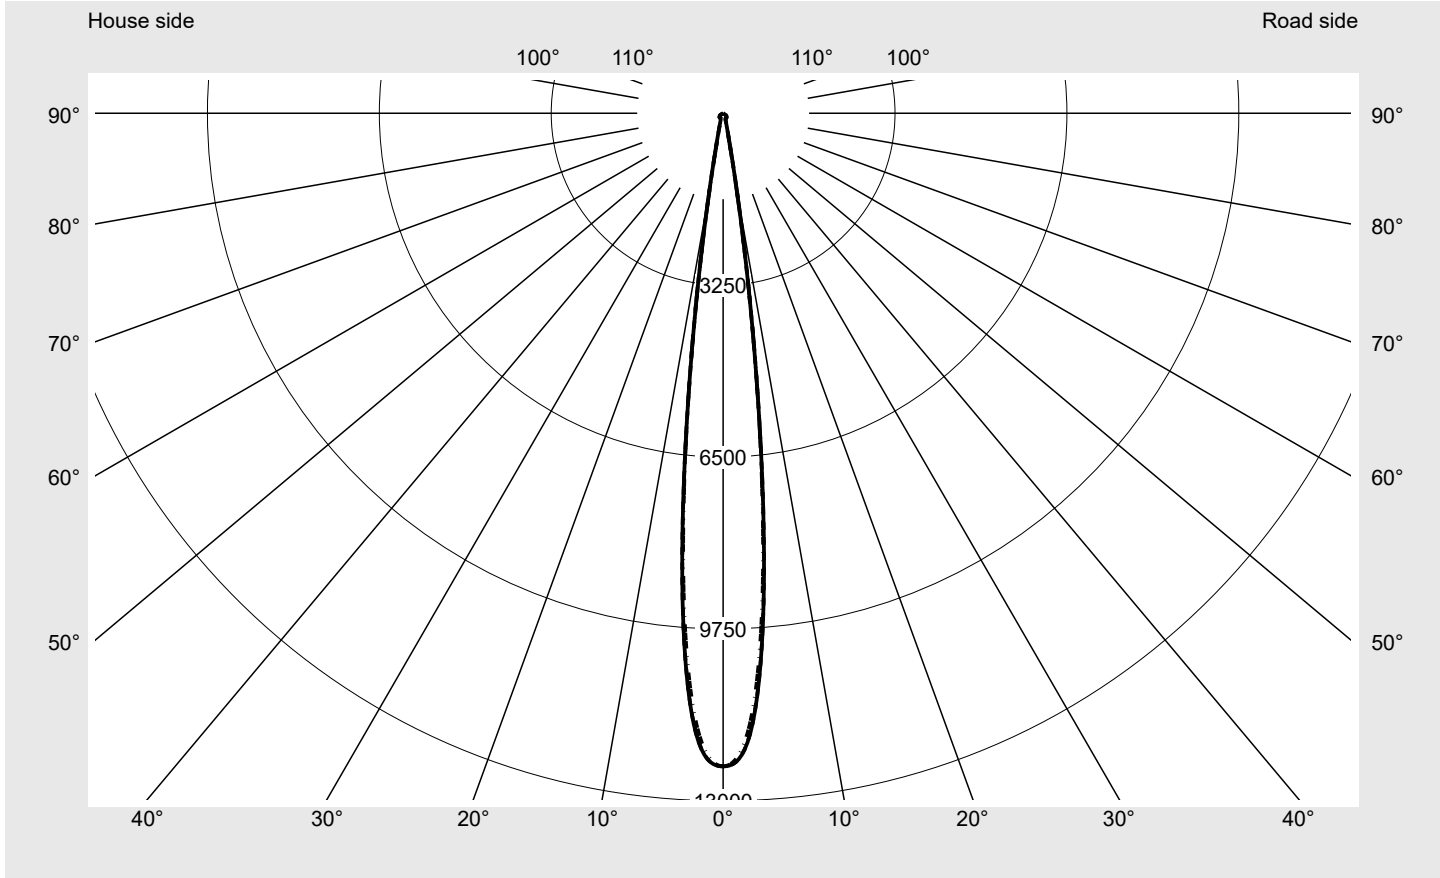

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G6
Imax 70°	33.3
Imax 80°	10.4
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E5K1A EAN: 4058352854136	LP number 59305_15
--	--	-------------------------------------

Envelope curve in cd/klm **KMK 0°** **siteco**

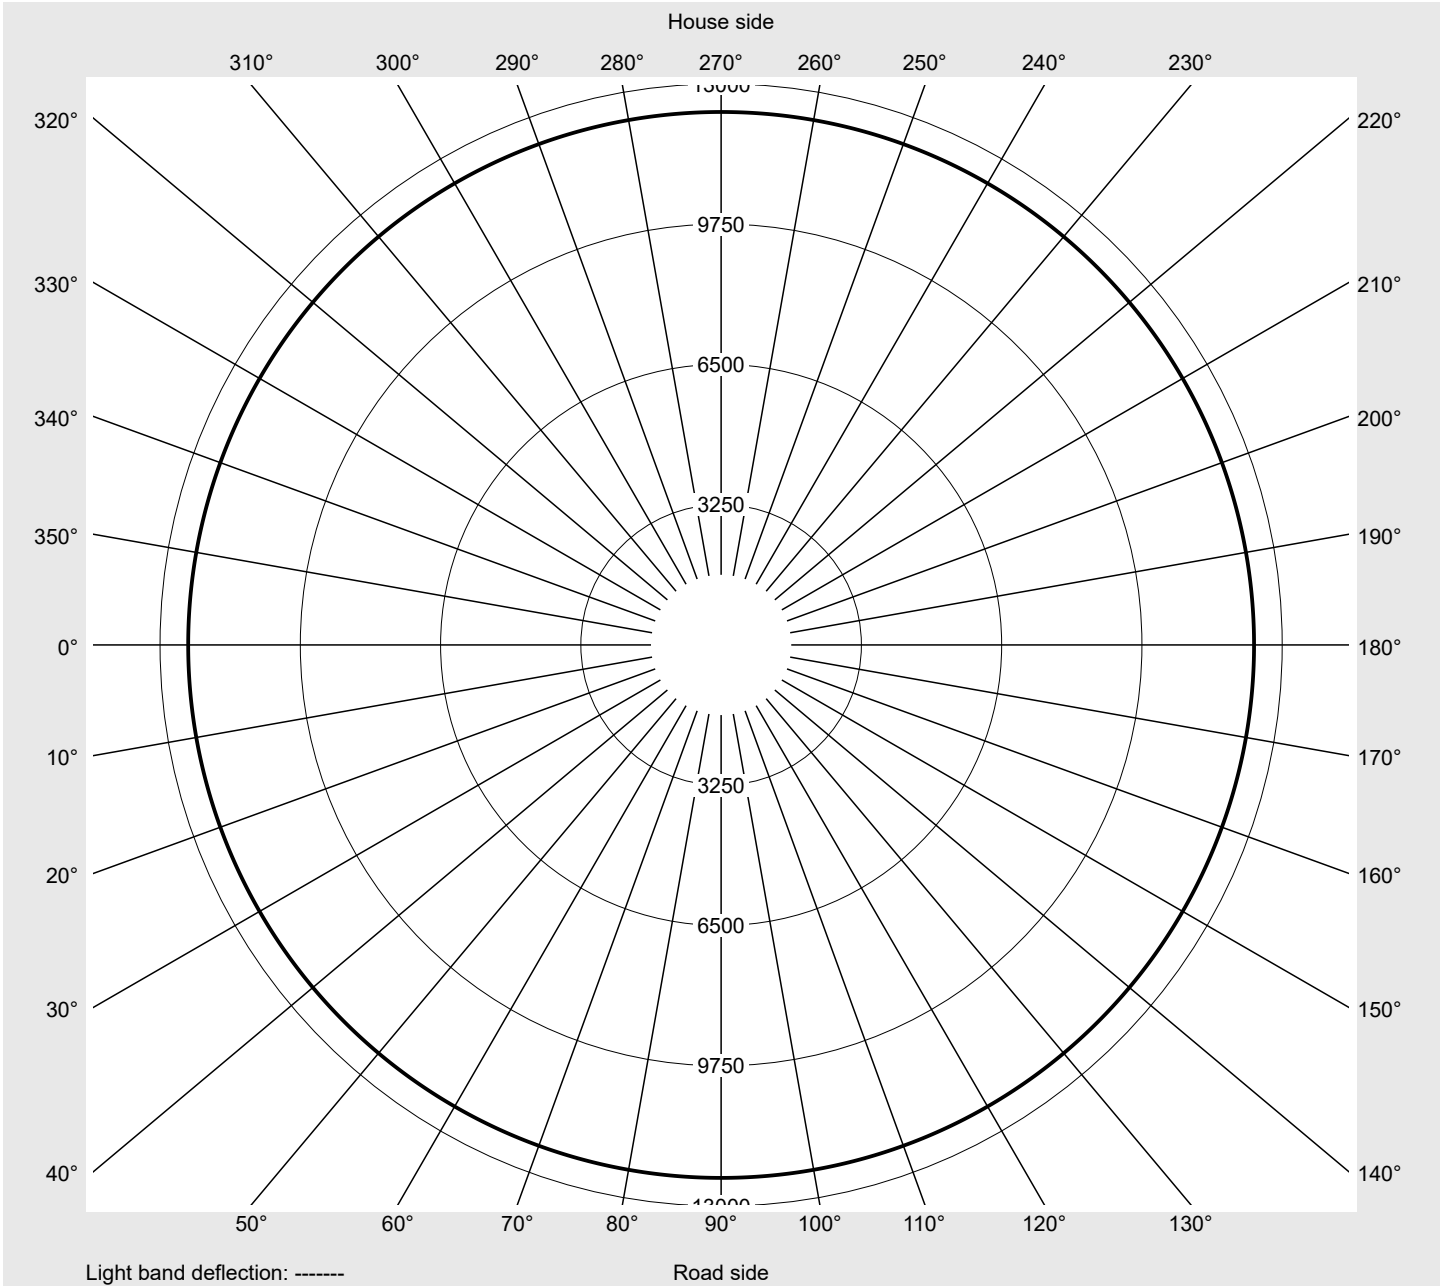

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E5K1A EAN: 4058352854136	LP number 59305_15
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	0° 180°	5°	10°	15°	20°	25°	30°	35°	40°	45°
		175° 185° 355°	170° 190° 350°	165° 195° 345°	160° 200° 340°	155° 205° 335°	150° 210° 330°	145° 215° 325°	140° 220° 320°	135° 225° 315°
γ Luminous intensity in cd/klm										
0,0°	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1
2,5°	11740.3	11736.4	11732.4	11728.5	11741.1	11753.7	11766.3	11748.6	11730.9	11713.2
5,0°	8862.5	8858.5	8854.4	8850.4	8960.8	9071.1	9181.5	9162.5	9143.5	9124.5
7,5°	4523.8	4521.3	4518.8	4516.3	4592.9	4669.4	4745.9	4754.6	4763.3	4771.9
10,0°	1521.6	1523.6	1525.5	1527.4	1539.1	1550.7	1562.3	1563.7	1565.2	1566.7
12,5°	537.5	527.2	516.9	506.6	509.7	512.9	516.0	503.2	490.5	477.7
15,0°	276.8	276.2	275.7	275.1	276.5	277.9	279.3	278.0	276.8	275.5
17,5°	185.9	185.4	185.0	184.5	185.1	185.7	186.2	185.7	185.2	184.7
20,0°	134.4	134.2	134.1	134.0	134.7	135.3	136.0	135.8	135.6	135.4
22,5°	118.4	118.3	118.2	118.2	118.5	118.9	119.3	119.6	119.9	120.2
25,0°	109.6	109.3	109.1	108.8	108.9	109.0	109.1	109.4	109.8	110.1
27,5°	104.3	104.0	103.7	103.4	103.2	103.0	102.9	103.0	103.2	103.4
30,0°	100.4	100.2	100.0	99.8	99.5	99.2	98.8	98.8	98.8	98.8
32,5°	99.1	98.7	98.4	98.0	97.7	97.4	97.1	96.9	96.7	96.6
35,0°	102.2	101.9	101.6	101.3	101.1	100.9	100.7	100.5	100.3	100.1
37,5°	105.3	105.0	104.7	104.4	104.6	104.8	104.9	105.0	105.0	105.1
40,0°	102.9	102.4	102.0	101.6	102.2	102.8	103.4	103.6	103.8	104.0
42,5°	99.8	99.0	98.2	97.3	98.1	98.8	99.6	99.9	100.1	100.4
45,0°	96.2	95.3	94.3	93.3	94.0	94.7	95.4	95.9	96.3	96.7
47,5°	90.7	89.6	88.5	87.5	88.3	89.1	89.9	90.4	90.9	91.4
50,0°	85.0	83.5	82.0	80.5	81.6	82.7	83.8	84.3	84.9	85.4
52,5°	79.1	77.5	75.8	74.1	75.4	76.6	77.9	78.3	78.6	79.0
55,0°	72.8	71.3	69.8	68.4	69.7	71.0	72.3	72.7	73.1	73.4
57,5°	66.1	64.6	63.1	61.6	63.0	64.4	65.8	66.1	66.5	66.8
60,0°	59.6	57.9	56.1	54.3	55.5	56.7	57.9	58.5	59.1	59.7
62,5°	52.9	51.3	49.6	48.0	48.8	49.6	50.4	51.3	52.2	53.0
65,0°	45.4	44.2	43.0	41.8	42.6	43.3	44.1	44.7	45.3	45.9
67,5°	38.3	37.5	36.8	36.0	36.7	37.5	38.2	38.7	39.2	39.6
70,0°	31.9	31.3	30.8	30.3	31.0	31.7	32.4	32.7	33.0	33.3
72,5°	25.9	25.6	25.3	25.0	25.5	26.0	26.5	26.7	26.9	27.1
75,0°	20.9	20.5	20.1	19.6	20.0	20.4	20.8	20.9	21.0	21.1
77,5°	15.9	15.4	14.9	14.5	14.8	15.1	15.4	15.4	15.5	15.6
80,0°	10.4	10.2	9.9	9.7	9.9	10.0	10.1	10.1	10.0	9.9
82,5°	5.7	5.6	5.5	5.4	5.5	5.5	5.6	5.5	5.4	5.4
85,0°	2.4	2.3	2.3	2.2	2.2	2.2	2.2	2.2	2.1	2.1
87,5°	0.6	0.6	0.6	0.5	0.5	0.5	0.5	0.5	0.5	0.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E5K1A EAN: 4058352854136	LP number 59305_15
Table of values for luminous intensities		Maximum luminous intensity

C-planes	50°	55°	60°	65°	70°	75°	80°	85°	90°	Phi-zone	Total Phi-zone	
	130°	125°	120°	115°	110°	105°	100°	95°				
	230°	235°	240°	245°	250°	255°	260°	265°	270°			
	310°	305°	300°	295°	290°	285°	280°	275°				
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm	
0,0°	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	12348.1	18.5	18.5
2,5°	11704.4	11695.7	11686.9	11645.2	11603.6	11561.9	11563.0	11564.1	11565.1	11565.1	139.7	158.2
5,0°	9110.0	9095.6	9081.1	8940.8	8800.6	8660.3	8659.8	8659.4	8658.9	8658.9	213.7	371.9
7,5°	4772.8	4773.6	4774.4	4699.1	4623.7	4548.4	4547.8	4547.2	4546.6	4546.6	166.3	538.2
10,0°	1560.2	1553.8	1547.4	1523.7	1500.0	1476.3	1480.8	1485.4	1490.0	1490.0	72.9	611.1
12,5°	479.8	481.9	484.0	474.2	464.5	454.7	460.6	466.5	472.4	472.4	29.1	640.2
15,0°	275.0	274.5	274.0	272.5	271.0	269.5	269.7	270.0	270.3	270.3	19.5	659.7
17,5°	184.6	184.6	184.5	183.4	182.3	181.2	181.7	182.1	182.6	182.6	15.2	674.8
20,0°	136.0	136.6	137.2	136.7	136.3	135.8	136.1	136.4	136.7	136.7	12.7	687.6
22,5°	120.6	121.0	121.3	121.0	120.7	120.4	120.4	120.5	120.6	120.6	12.6	700.1
25,0°	110.3	110.5	110.7	110.6	110.5	110.4	110.4	110.4	110.5	110.5	12.7	712.9
27,5°	103.5	103.5	103.6	103.7	103.7	103.8	103.9	103.9	104.0	104.0	13.1	726.0
30,0°	98.9	99.0	99.0	99.2	99.4	99.6	99.5	99.4	99.3	99.3	13.6	739.6
32,5°	96.5	96.5	96.5	96.5	96.6	96.6	96.7	96.9	97.0	97.0	14.3	753.9
35,0°	99.9	99.8	99.7	99.7	99.7	99.7	99.9	100.0	100.2	100.2	15.8	769.7
37,5°	104.9	104.6	104.4	104.2	104.1	103.9	104.1	104.3	104.5	104.5	17.5	787.1
40,0°	103.6	103.3	102.9	102.3	101.7	101.1	101.5	101.9	102.3	102.3	18.1	805.2
42,5°	100.0	99.6	99.2	98.5	97.9	97.2	98.0	98.8	99.6	99.6	18.3	823.5
45,0°	96.2	95.7	95.2	94.7	94.1	93.6	94.4	95.1	95.9	95.9	18.4	842.0
47,5°	90.8	90.2	89.6	88.9	88.3	87.7	88.2	88.8	89.4	89.4	18.1	860.0
50,0°	84.6	83.7	82.8	82.0	81.2	80.4	81.2	81.9	82.6	82.6	17.4	877.4
52,5°	78.1	77.2	76.2	75.5	74.7	74.0	74.9	75.9	76.8	76.8	16.6	894.1
55,0°	72.4	71.4	70.4	69.8	69.2	68.6	68.9	69.2	69.5	69.5	15.9	909.9
57,5°	65.9	65.0	64.1	63.3	62.5	61.7	61.8	61.9	62.0	62.0	14.8	924.7
60,0°	58.7	57.6	56.5	55.7	54.9	54.1	54.3	54.6	54.9	54.9	13.4	938.2
62,5°	51.9	50.7	49.5	48.9	48.3	47.7	48.0	48.3	48.7	48.7	12.1	950.3
65,0°	45.0	44.1	43.2	42.6	42.0	41.3	41.7	42.1	42.6	42.6	10.8	961.1
67,5°	38.8	38.0	37.2	36.7	36.2	35.7	36.0	36.3	36.6	36.6	9.5	970.6
70,0°	32.7	32.2	31.6	31.2	30.7	30.2	30.5	30.8	31.1	31.1	8.1	978.7
72,5°	26.7	26.3	25.9	28.1	30.4	32.7	30.3	28.0	25.6	25.6	7.1	985.8
75,0°	20.8	20.6	20.3	20.1	19.8	19.6	18.9	18.3	17.6	17.6	5.3	991.1
77,5°	15.4	15.1	14.9	14.7	14.5	14.3	14.6	14.8	15.0	15.0	4.0	995.1
80,0°	9.9	9.8	9.8	9.7	9.6	9.5	9.6	9.7	9.8	9.8	2.7	997.8
82,5°	5.4	5.4	5.4	5.3	5.3	5.2	5.3	5.4	5.5	5.5	1.5	999.3
85,0°	2.1	2.2	2.2	2.1	2.1	2.1	2.1	2.2	2.2	2.2	0.6	999.9
87,5°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.1	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Floodlight FL21 midi	Order number: 5XA7782E5K1A EAN: 4058352854136	LP number 59305_15
---------------------------------------	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	25160	208.1	227.1	217.6
95	241	252	23872	193.9	211.3	202.6
90	229	250	22684	181.2	197.5	189.4
85	216	248	21396	168.0	183.0	175.5
80	203	246	20108	155.3	169.0	162.2
75	190	243	18820	143.2	155.6	149.4
70	178	241	17632	132.3	143.8	138.0
65	165	238	16344	121.0	131.4	126.2
60	152	235	15056	110.1	119.4	114.8
55	140	232	13868	100.3	108.8	104.6
50	127	229	12580	90.1	97.6	93.8
45	114	225	11292	80.1	86.7	83.4
40	102	221	10104	71.0	76.9	74.0
35	89	216	8816	61.5	66.5	64.0
30	76	210	7528	52.4	56.5	54.4
25	63	203	6240	43.7	47.0	45.4
20	51	195	5052	36.0	38.6	37.3
15	38	184	3764	27.7	29.6	28.6
13	32	178	3170	24.0	25.5	24.8