
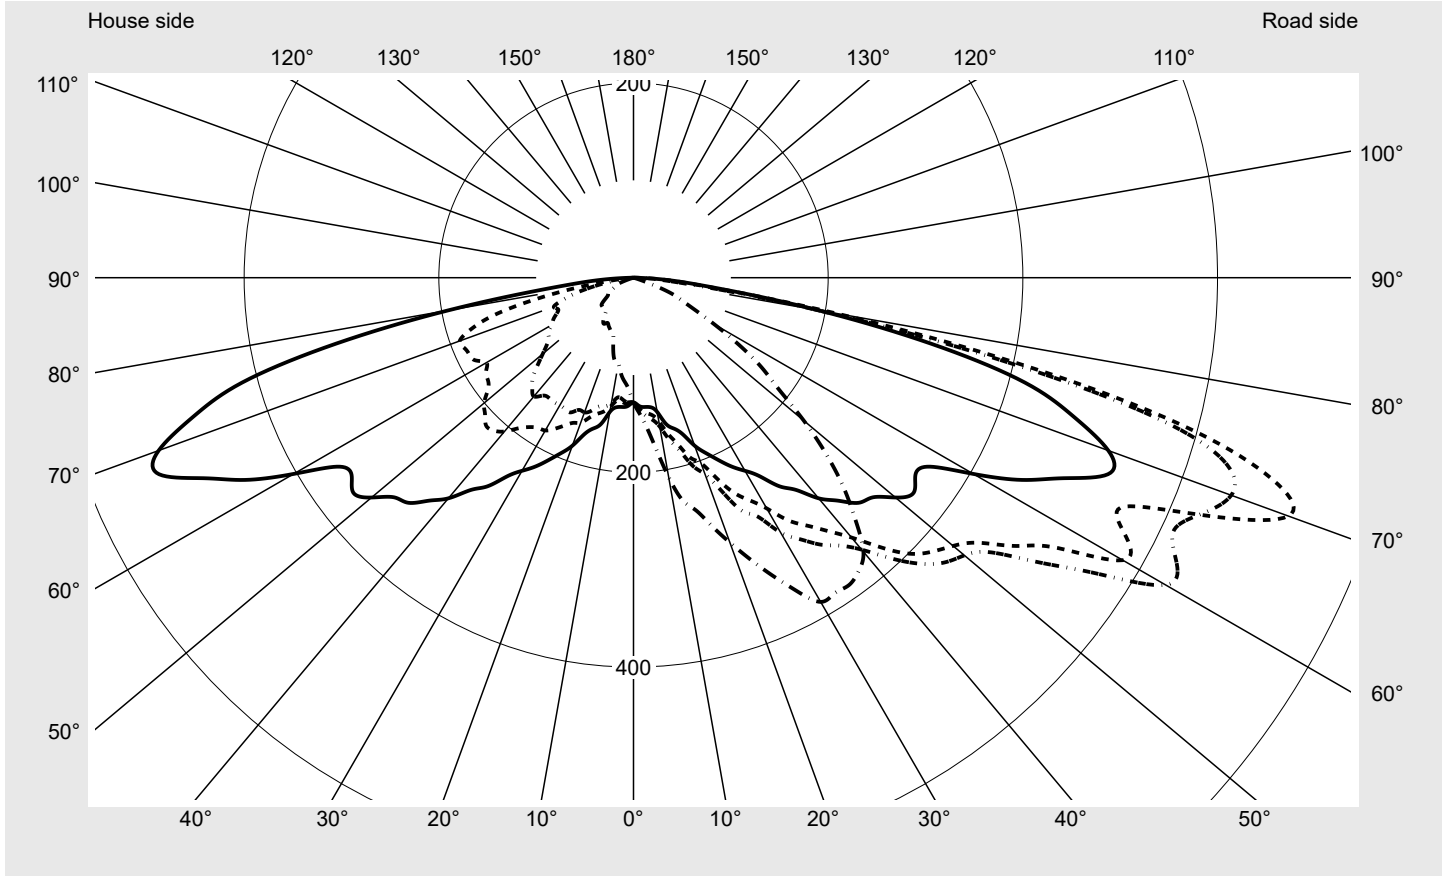


Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3K51G08ME EAN: 4058352991954	LP number 59352_81
	Version post-top or side-entry mounting Optic asymmetric, extremely wide distribution with an additional rear light component (ST1.0P1.0) Cover transparent, PMMA Lamps LED 3000 K CRI ≥ 70 Controlgear ECG SITECO iQ - DALI2 Rated values Net luminous flux = 9410 lm Power consumption = 63.0 W Luminous efficacy = 149.4 lm/W	serial documentation 28.09.2023



Luminous intensity in cd/klm C180-0 C190-10 C195-15 C270-90 **Imax: 716 cd/klm**




Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%
Measurement conditions	
DIN EN 13032 and DIN 5032	

Luminous intensity class acc. to EN13201-2	
Class:	---
Imax 70°	715.9
Imax 80°	211.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3K51G08ME EAN: 4058352991954	LP number 59352_81
--	--	------------------------------

Envelope curve in cd/klm **KMK 70°** **KMK 67.5°** **KMK 65°** **KMK 62.5°** **siteco**

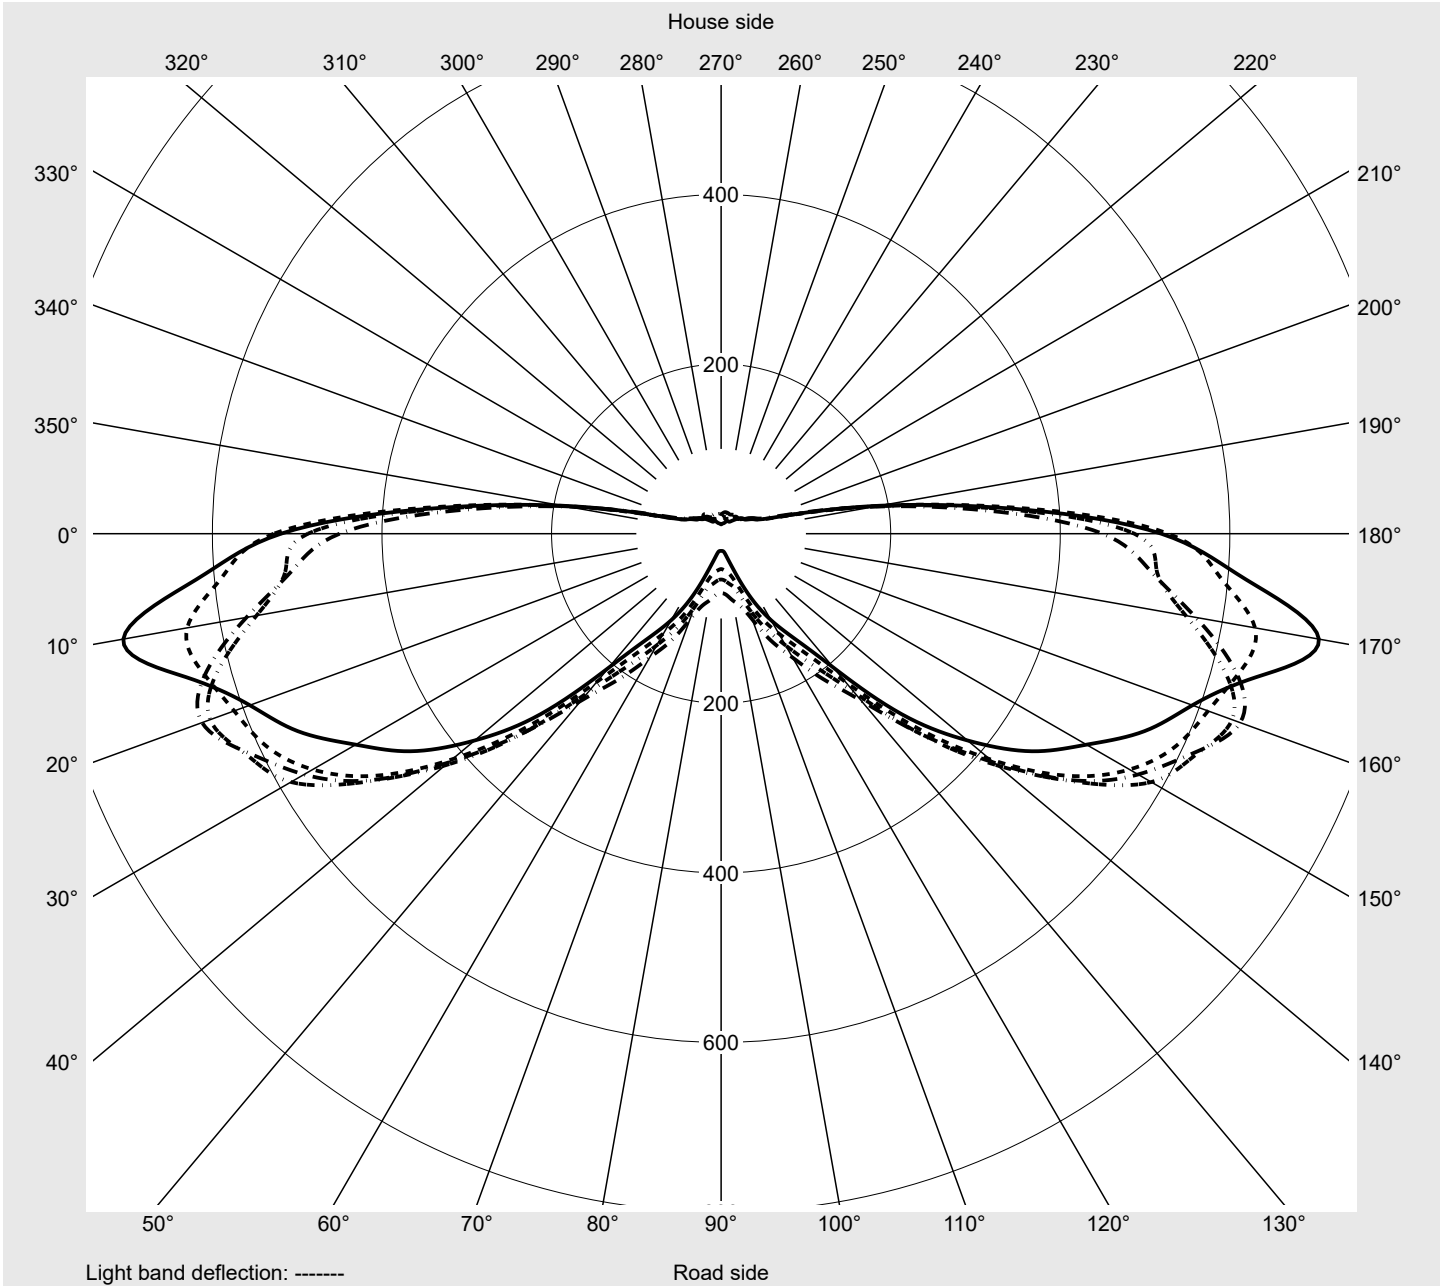

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3K51G08ME EAN: 4058352991954	LP number 59352_81
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2
2,5°	131.9	133.1	134.4	135.3	136.1	137.2	138.1	138.5	138.9	139.0	139.3	139.7	140.0
5,0°	133.3	136.3	139.2	142.0	144.2	146.8	149.3	150.8	152.3	154.0	154.1	154.1	154.2
7,5°	134.2	137.3	142.1	147.0	151.6	156.3	160.9	163.9	165.5	166.2	166.4	167.5	169.8
10,0°	140.0	143.8	149.6	155.4	160.3	165.9	171.0	176.6	180.6	184.8	189.2	191.7	194.2
12,5°	153.8	159.9	164.5	170.5	174.5	179.0	185.9	193.5	201.5	207.2	212.6	217.0	218.2
15,0°	160.5	168.7	177.7	183.9	189.8	198.0	203.8	210.6	218.6	226.9	235.9	241.4	244.7
17,5°	168.8	181.3	193.8	202.8	211.2	220.6	226.5	232.5	237.6	240.4	243.6	251.6	259.6
20,0°	183.7	194.6	202.9	215.1	230.5	240.6	251.4	262.0	264.0	267.2	266.7	270.0	277.4
22,5°	195.2	209.8	222.8	237.7	255.0	268.7	279.1	288.6	294.5	291.2	288.3	291.7	296.8
25,0°	206.8	223.4	243.5	264.4	283.7	298.5	310.0	318.7	318.7	310.6	309.8	312.9	314.5
27,5°	218.8	238.9	257.7	276.8	296.1	315.4	328.9	335.6	334.9	328.2	328.2	328.1	333.0
30,0°	229.1	251.4	273.7	302.4	319.0	329.9	343.0	351.4	352.9	349.2	351.7	347.0	346.1
32,5°	242.1	269.4	295.4	318.6	334.2	353.6	363.1	368.9	375.2	371.5	368.4	360.1	360.1
35,0°	261.7	283.1	310.9	334.7	348.2	363.7	367.7	375.9	382.1	380.9	376.9	366.9	362.4
37,5°	275.0	302.3	328.0	346.9	361.7	374.6	383.0	386.3	384.6	381.1	372.6	362.9	351.7
40,0°	295.9	325.1	348.4	364.7	379.0	389.7	398.2	394.9	389.9	378.8	363.5	351.0	337.2
42,5°	310.6	339.7	375.5	390.8	405.9	417.4	419.7	407.0	389.2	375.6	363.2	351.1	338.1
45,0°	327.0	356.8	401.0	415.5	422.4	435.0	432.0	419.7	398.7	383.6	359.5	333.6	325.0
47,5°	333.9	374.9	416.5	433.1	447.7	461.2	453.6	427.5	405.6	391.2	348.5	311.8	303.8
50,0°	351.3	396.6	428.7	443.8	458.8	467.3	466.8	442.8	412.8	374.7	335.7	302.3	279.2
52,5°	362.8	409.2	447.3	463.6	472.4	479.1	473.9	438.9	404.4	361.4	312.7	270.8	244.5
55,0°	353.5	419.5	480.5	510.4	523.1	504.3	493.2	458.8	414.4	346.1	280.2	243.6	218.3
57,5°	361.3	439.7	516.9	566.3	574.9	547.1	515.9	475.9	416.0	335.6	267.1	224.4	202.3
60,0°	403.1	486.3	580.4	631.1	636.4	593.2	539.7	488.6	417.9	327.6	263.9	223.6	188.6
62,5°	449.9	508.7	568.4	628.4	651.5	613.4	567.9	507.1	419.8	334.7	257.1	208.9	168.8
65,0°	487.4	516.0	556.5	612.9	641.3	617.4	585.9	509.9	425.2	335.5	244.6	189.6	152.1
67,5°	527.6	591.0	639.4	632.8	611.2	592.2	556.2	497.7	413.8	320.6	228.0	170.6	135.9
70,0°	519.1	621.7	715.9	653.5	591.6	551.0	497.6	447.4	379.4	300.9	206.4	151.2	117.8
72,5°	473.8	582.3	687.8	639.5	567.2	504.4	431.3	383.3	340.4	281.0	189.5	101.8	60.1
75,0°	416.3	513.3	580.7	556.3	489.7	409.1	328.8	303.1	269.2	185.1	81.6	28.7	9.7
77,5°	313.0	368.1	399.1	375.0	320.3	276.7	231.0	180.0	107.5	42.5	10.9	3.3	1.9
80,0°	193.3	205.6	211.6	192.3	158.7	133.4	99.0	48.9	15.9	5.9	2.9	2.1	1.5
82,5°	95.8	94.8	91.2	78.0	60.2	46.5	29.0	15.0	7.5	4.3	2.2	1.6	1.2
85,0°	49.4	47.7	46.4	32.8	19.7	17.3	14.3	9.4	4.8	2.7	1.4	1.1	0.8
87,5°	18.5	18.0	17.4	12.3	7.3	6.4	5.3	3.5	1.8	1.0	0.5	0.4	0.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3K51G08ME EAN: 4058352991954	LP number 59352_81
Table of values for luminous intensities		Maximum luminous intensity



C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2
2,5°	139.7	139.2	139.3	139.5	139.6	139.5	130.6	129.3	128.1	127.1	125.8	124.4	123.2
5,0°	154.0	153.5	153.4	153.5	154.3	153.9	131.0	128.3	125.8	123.5	120.9	118.8	116.8
7,5°	171.5	172.2	173.4	174.8	176.4	177.3	130.7	127.2	124.0	121.7	119.7	117.5	115.2
10,0°	196.7	199.5	202.4	204.3	207.0	208.0	136.6	134.1	131.0	128.3	124.5	120.1	115.3
12,5°	220.5	223.4	225.6	229.3	233.0	234.6	147.2	140.8	135.1	129.1	123.4	118.9	115.0
15,0°	246.7	246.7	249.3	249.3	247.0	247.3	153.2	144.8	137.0	130.4	123.2	116.0	110.6
17,5°	263.7	263.9	267.0	268.9	268.4	267.3	159.5	150.7	143.2	135.1	124.2	115.1	110.9
20,0°	283.7	287.5	288.9	289.9	287.7	289.6	170.7	158.5	147.2	136.2	123.9	115.3	112.5
22,5°	302.3	308.6	313.5	316.4	314.2	313.1	176.9	161.4	147.0	134.8	124.0	114.1	108.1
25,0°	319.6	325.0	330.2	333.5	335.7	337.5	185.9	167.5	152.7	135.2	120.4	108.9	101.7
27,5°	339.9	342.2	348.2	354.7	358.9	362.7	196.0	175.0	152.2	131.1	115.5	101.5	90.0
30,0°	350.5	354.2	362.3	371.3	380.3	384.6	206.0	181.2	151.3	128.1	109.5	92.6	79.5
32,5°	360.5	358.1	371.9	386.1	389.5	384.4	214.1	182.9	151.7	125.9	103.9	85.8	74.0
35,0°	363.6	363.5	372.6	389.9	389.0	385.7	226.4	187.4	151.1	120.7	97.8	79.7	70.6
37,5°	354.5	356.5	368.3	381.3	381.6	380.0	236.5	195.1	152.6	116.8	91.1	72.8	66.4
40,0°	342.3	347.0	351.6	357.7	363.5	367.5	247.9	206.3	159.2	117.9	90.7	68.7	61.2
42,5°	339.3	336.1	327.7	330.1	331.6	337.6	263.3	212.9	153.9	111.4	86.4	64.7	57.2
45,0°	321.2	313.7	310.4	306.0	304.1	305.7	277.7	214.3	146.6	99.8	80.5	63.4	53.5
47,5°	299.5	281.5	270.1	265.8	264.6	268.8	276.2	206.9	134.0	90.1	74.0	60.8	49.6
50,0°	262.1	248.2	239.5	227.8	224.5	228.3	281.5	200.4	121.7	81.1	68.2	55.1	45.9
52,5°	228.3	216.8	205.2	190.1	185.4	187.8	276.3	188.3	111.8	72.3	59.3	48.0	42.3
55,0°	199.7	185.0	171.8	152.6	152.8	160.7	269.3	182.7	106.3	63.6	51.7	43.1	38.9
57,5°	179.3	152.6	137.0	127.5	126.4	128.8	269.6	179.7	103.7	58.3	47.2	37.3	34.6
60,0°	155.7	127.5	108.3	102.7	97.7	96.2	278.8	174.5	97.1	56.9	46.7	36.8	34.2
62,5°	139.1	107.8	88.5	80.1	72.6	70.1	314.0	183.6	92.8	53.4	43.5	36.4	32.3
65,0°	122.3	92.6	68.8	60.7	55.9	54.0	333.9	186.3	87.0	49.3	42.3	35.8	29.9
67,5°	107.1	75.0	54.9	46.5	43.4	41.7	350.6	188.3	84.1	49.6	41.2	35.2	30.4
70,0°	83.7	49.8	31.3	22.8	20.5	20.3	341.6	190.0	87.1	49.6	40.6	33.1	31.3
72,5°	32.1	13.9	7.4	4.8	4.2	4.1	315.2	174.3	76.4	45.7	37.5	30.4	29.4
75,0°	2.6	1.7	1.5	1.3	1.2	1.2	268.9	148.1	61.6	40.1	35.1	29.3	26.7
77,5°	1.6	1.3	1.1	1.0	1.0	0.9	198.3	104.8	42.7	27.8	26.0	20.9	16.4
80,0°	1.2	1.0	0.8	0.7	0.7	0.7	119.3	59.6	25.9	15.2	13.3	9.2	5.3
82,5°	0.9	0.8	0.6	0.5	0.5	0.5	59.8	24.2	13.5	5.8	4.8	3.5	2.9
85,0°	0.6	0.5	0.4	0.4	0.3	0.3	29.0	8.5	5.3	2.1	2.0	1.9	2.0
87,5°	0.2	0.2	0.2	0.1	0.1	0.1	10.8	3.2	2.0	0.8	0.7	0.7	0.8
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3K51G08ME EAN: 4058352991954	LP number 59352_81
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	128.2	0.2	0.2
2,5°	121.7	120.7	119.3	118.4	117.6	116.9	116.2	115.4	115.0	114.9	114.6	1.6	1.7
5,0°	114.8	113.1	112.0	110.8	109.7	109.0	108.3	107.7	107.4	107.0	106.8	3.2	4.9
7,5°	112.8	110.1	107.8	105.2	102.4	100.6	99.8	99.2	99.2	99.4	99.0	4.9	9.8
10,0°	111.0	108.1	106.0	104.2	102.2	100.5	98.4	95.8	92.3	90.4	89.5	7.0	16.8
12,5°	110.8	106.9	104.3	101.8	98.8	95.9	93.2	90.1	88.4	87.5	87.5	9.3	26.0
15,0°	106.6	103.0	99.1	94.7	90.0	86.2	83.5	81.4	80.1	79.8	79.9	11.6	37.6
17,5°	107.1	99.8	93.5	88.0	83.4	78.6	74.7	73.0	71.8	70.3	69.1	14.1	51.7
20,0°	109.2	100.0	89.7	83.8	79.9	76.0	71.7	67.3	64.0	62.0	61.1	16.9	68.6
22,5°	102.5	91.8	83.7	78.7	75.2	70.8	68.2	66.2	63.7	61.2	59.8	20.1	88.7
25,0°	95.1	84.8	76.7	72.5	67.6	62.8	60.8	59.7	57.7	57.3	57.7	23.2	112.0
27,5°	84.0	78.9	72.9	68.0	63.2	59.7	57.5	57.1	57.2	56.1	55.5	26.3	138.3
30,0°	72.7	70.2	65.5	61.1	60.2	59.3	57.7	56.9	54.7	53.5	53.6	29.5	167.8
32,5°	68.2	64.3	59.9	57.8	57.7	56.3	53.8	53.1	53.3	54.6	56.2	32.7	200.5
35,0°	64.3	59.7	55.2	54.1	55.3	52.4	49.2	48.4	52.0	54.4	54.1	35.3	235.8
37,5°	60.9	56.9	53.6	52.1	51.2	50.8	50.3	48.5	48.3	48.8	48.6	37.6	273.4
40,0°	57.3	53.2	50.6	49.1	47.0	46.1	47.1	48.1	48.2	45.9	43.8	39.8	313.2
42,5°	53.3	50.2	45.6	45.2	44.9	45.4	45.9	46.0	45.8	44.5	43.9	42.0	355.2
45,0°	50.6	48.2	43.3	43.6	45.2	43.5	45.9	47.8	44.0	43.3	44.1	43.8	399.0
47,5°	43.6	42.9	41.9	41.4	39.4	39.4	41.9	43.2	41.2	40.8	43.5	44.7	443.6
50,0°	41.1	39.3	38.2	40.8	40.1	38.6	39.8	40.6	40.0	40.8	42.8	45.2	488.8
52,5°	40.0	37.3	34.7	37.5	39.3	38.2	37.0	37.3	38.2	38.2	37.5	45.0	533.9
55,0°	36.4	34.1	34.0	35.6	36.0	35.8	35.0	34.6	33.9	33.1	32.3	45.6	579.5
57,5°	34.9	32.7	32.4	32.4	31.9	32.6	32.5	32.0	32.2	31.9	30.9	46.9	626.4
60,0°	33.1	32.7	30.8	29.0	28.2	28.2	29.7	29.3	29.1	28.7	28.4	49.2	675.6
62,5°	28.6	29.9	30.1	27.4	25.9	24.9	25.4	25.9	25.8	24.4	23.2	50.3	725.8
65,0°	26.9	27.0	26.4	23.8	22.4	21.6	21.1	21.7	23.2	22.9	21.2	50.5	776.3
67,5°	27.2	24.7	21.6	20.1	20.1	19.6	18.4	18.1	19.9	20.0	18.7	51.1	827.4
70,0°	28.3	23.8	19.9	17.2	16.8	16.4	14.5	12.9	12.3	11.6	11.0	49.5	876.9
72,5°	26.1	22.1	18.7	12.5	8.3	7.5	6.2	4.8	4.0	3.7	3.6	44.5	921.5
75,0°	22.3	16.3	9.7	4.9	2.6	2.2	2.1	2.0	2.0	1.9	1.9	35.7	957.2
77,5°	11.6	6.0	3.5	2.2	1.7	1.5	1.4	1.3	1.2	1.0	0.7	23.1	980.3
80,0°	3.7	2.8	2.2	1.8	1.4	1.0	0.7	0.7	0.7	0.4	0.1	11.5	991.8
82,5°	2.8	2.2	1.6	1.3	1.0	0.7	0.5	0.4	0.4	0.2	0.1	5.0	996.8
85,0°	2.1	1.5	1.0	0.8	0.6	0.4	0.3	0.2	0.1	0.1	0.1	2.3	999.1
87,5°	0.8	0.6	0.4	0.3	0.2	0.2	0.1	0.1	0.1	0.0	0.0	0.9	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 midi LED	Order number: 5XC3K51G08ME EAN: 4058352991954	LP number 59352_81
--	--	------------------------------

Dimming levels table	environmental temperature: 25°C	siteco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]	Power consumption [W]	Power consumption [W]
				start of lifetime	end of lifetime	average
100	254	254	9410	63.0	66.8	64.9
95	241	252	8928	59.4	62.9	61.2
90	229	250	8484	56.1	59.5	57.8
85	216	248	8002	52.7	55.8	54.2
80	203	246	7521	49.3	52.1	50.7
75	190	243	7039	45.9	48.5	47.2
70	178	241	6594	42.8	45.3	44.0
65	165	238	6113	39.5	41.8	40.6
60	152	235	5631	36.3	38.3	37.3
55	140	232	5187	33.3	35.2	34.2
50	127	229	4705	30.2	31.8	31.0
45	114	225	4223	27.0	28.4	27.7
40	102	221	3779	24.2	25.5	24.8
35	89	216	3297	21.2	22.4	21.8
30	76	210	2816	18.4	19.3	18.8
25	63	203	2334	15.5	16.2	15.8
20	51	195	1889	12.8	13.5	13.2
15	38	184	1408	9.9	10.4	10.2
13	33	179	1223	8.6	9.1	8.8