


# Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779127G01AA</b> <b>EAN: 4058352851043</b>	<b>LP number</b> <b>59242_8</b>
	<b>Version</b> standard bracket <b>Optic</b> asymmetric distribution PL33 <b>Cover</b> toughened safety glass <b>Lamps</b> LED 5000 K   CRI ≥ 70 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Ta = 10 °C Net luminous flux = 175390 lm Power consumption = 1425.5 W Luminous efficacy = 123 lm/W	<b>serial documentation</b> <b>02.11.2023</b>



**Luminous intensity in cd/klm**
C180-0
C265-85
C270-90
**Imax: 2172 cd/klm**

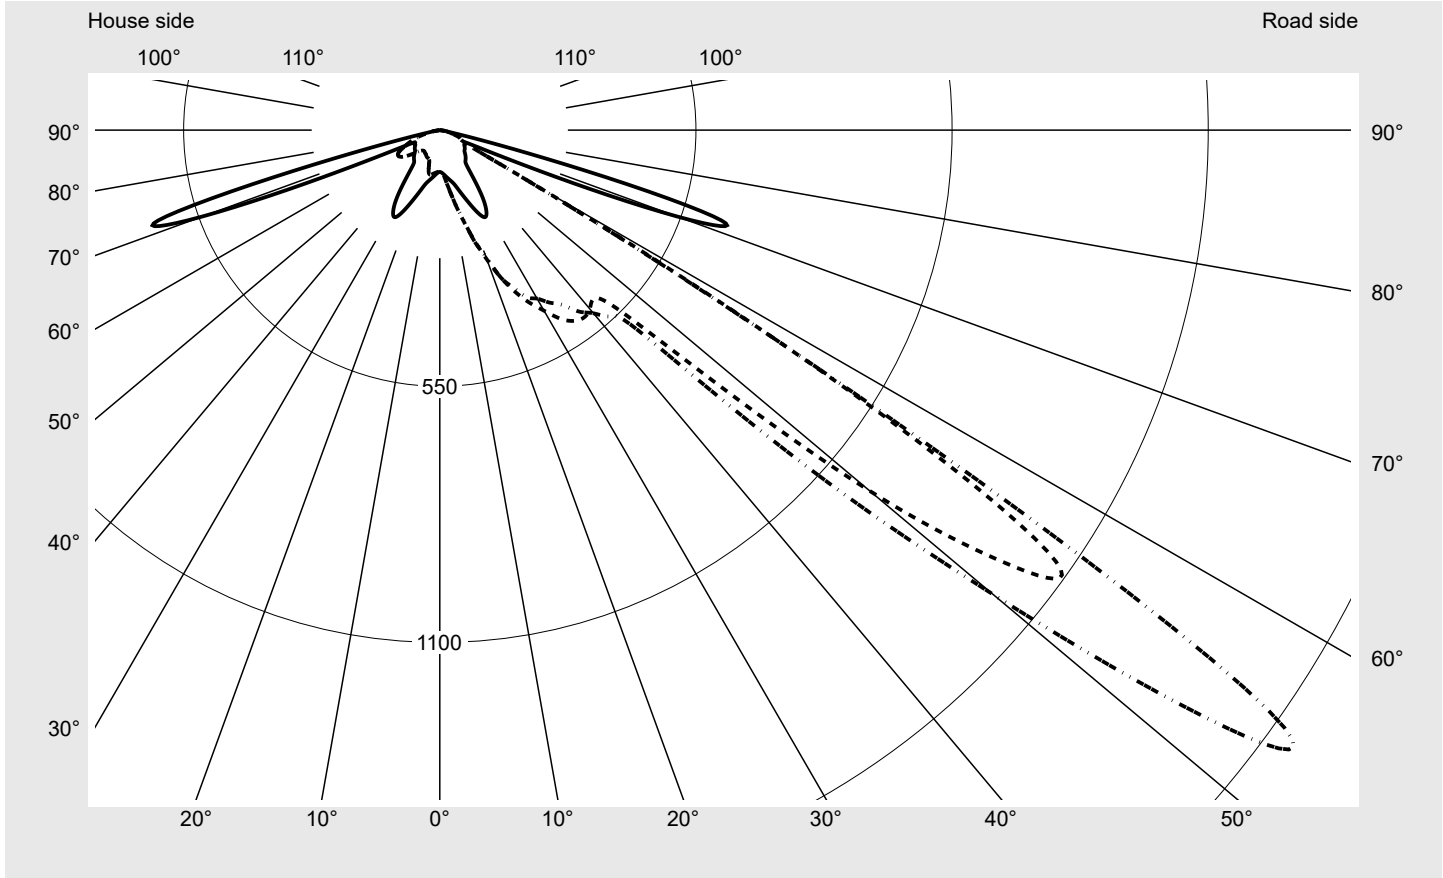

Luminaire output ratios	
Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%


Luminous intensity class acc. to EN13201-2	
Class:	G3
Imax 70°	597.1
Imax 80°	17.6
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

**Measurement conditions**  
 DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779127G01AA</b> <b>EAN: 4058352851043</b>	<b>LP number</b> <b>59242_8</b>
---	--	------------------------------------

**Envelope curve in cd/klm**      **KMK 55°**    **KMK 52,5°**    **KMK 50°**    **KMK 47,5°**      **siteco**

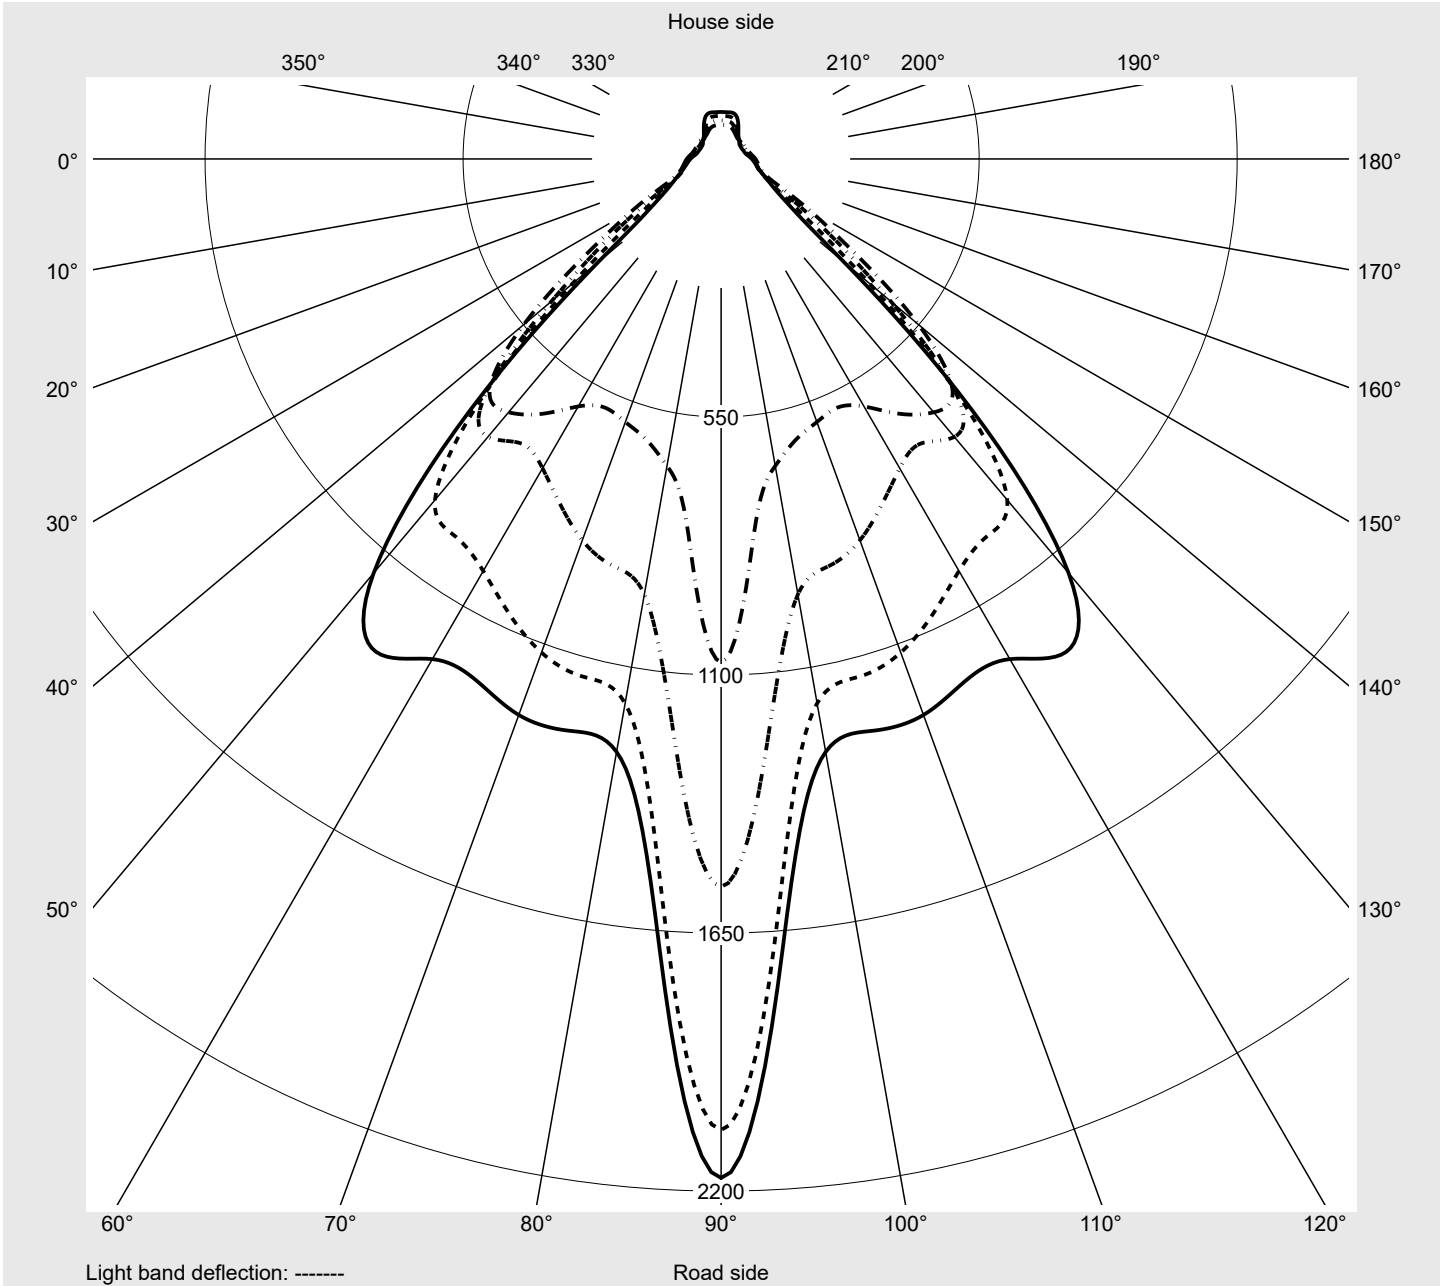

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779127G01AA</b> <b>EAN: 4058352851043</b>	<b>LP number</b> <b>59242_8</b>
---	--	------------------------------------



### Table of values for luminous intensities Maximum luminous intensity

C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
$\gamma$	Luminous intensity in cd/klm												
0,0°	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8
2,5°	91.5	91.5	91.5	91.5	91.4	91.4	91.4	91.3	91.3	91.1	91.0	90.8	90.7
5,0°	95.2	95.2	95.2	95.2	95.2	95.3	95.3	95.5	95.7	96.0	96.3	96.5	96.8
7,5°	100.2	100.4	100.5	100.8	101.3	102.2	103.5	105.3	107.5	109.8	111.9	113.5	114.7
10,0°	105.8	106.2	107.0	108.6	111.6	116.4	122.5	129.1	135.2	140.2	143.8	145.7	146.4
12,5°	112.1	113.1	115.7	121.6	131.3	144.1	157.4	169.6	179.5	186.5	190.4	191.4	190.0
15,0°	120.4	122.6	128.8	141.9	160.7	181.8	202.2	219.9	233.4	242.1	245.8	245.1	241.2
17,5°	134.5	138.5	149.5	171.2	199.2	229.9	259.8	286.2	305.8	318.3	322.2	318.2	308.4
20,0°	152.8	158.9	175.6	206.0	243.9	283.9	321.1	353.7	381.0	403.2	416.3	417.4	403.5
22,5°	174.6	184.5	207.6	245.0	286.4	326.0	360.0	390.0	418.1	446.4	472.3	492.4	498.8
25,0°	197.6	211.8	239.8	280.3	323.3	362.1	394.1	421.8	448.3	473.9	499.0	523.6	544.2
27,5°	210.6	231.0	265.1	311.5	358.9	394.2	432.5	461.6	487.5	509.2	526.0	540.7	555.4
30,0°	199.9	224.4	264.4	318.7	373.6	420.8	461.4	497.4	526.8	545.2	553.0	555.1	555.9
32,5°	170.4	195.6	237.8	296.3	357.8	416.7	471.0	523.3	563.4	580.0	578.1	569.0	556.7
35,0°	125.9	145.1	184.1	244.4	313.8	385.9	456.6	529.2	591.2	613.1	600.8	579.7	557.3
37,5°	94.1	102.5	125.5	172.6	242.7	332.8	425.5	518.8	603.0	639.5	623.0	589.3	559.1
40,0°	85.7	90.2	99.2	122.6	168.2	254.5	372.1	499.6	603.2	659.3	649.4	603.5	559.7
42,5°	82.2	86.8	91.9	105.4	133.5	195.4	301.4	467.2	603.5	670.8	671.6	618.2	556.5
45,0°	78.1	82.7	87.0	94.8	113.2	162.3	246.8	402.6	593.1	680.7	686.3	637.4	564.7
47,5°	73.3	77.5	82.1	88.7	101.2	135.8	215.6	342.7	549.3	697.8	705.0	663.1	609.1
50,0°	69.1	73.5	77.9	83.6	94.0	118.1	177.3	287.9	472.3	710.1	773.4	740.8	761.4
52,5°	67.6	71.9	76.1	81.8	92.2	112.4	148.9	227.9	413.8	722.9	948.9	984.2	1014.1
55,0°	65.5	70.4	76.3	83.3	94.6	111.0	136.0	186.8	341.8	754.2	1152.2	1282.6	1231.0
57,5°	62.8	69.6	78.6	88.1	100.7	114.8	134.9	171.7	221.3	573.8	1000.2	1255.1	1253.7
60,0°	61.1	70.0	82.1	95.0	107.8	118.2	131.7	162.4	154.5	186.0	429.5	717.8	757.9
62,5°	61.7	73.7	88.4	102.5	113.0	115.9	116.9	134.3	133.0	93.1	107.9	177.8	237.9
65,0°	67.6	85.8	98.8	105.9	108.2	102.7	95.3	97.6	106.1	75.7	61.5	64.5	70.9
67,5°	202.1	253.8	217.4	146.6	99.5	80.2	71.1	66.2	68.4	61.9	51.6	51.2	52.0
70,0°	541.8	597.1	448.5	245.3	109.9	61.0	52.1	46.8	48.0	48.2	45.4	45.2	44.8
72,5°	615.2	573.0	359.3	204.2	107.4	49.3	37.3	35.4	37.3	38.7	38.3	38.0	37.0
75,0°	235.5	183.2	99.8	46.0	59.2	36.6	27.6	28.3	29.7	30.7	30.1	30.5	29.7
77,5°	41.7	38.1	28.1	25.3	26.3	21.8	20.4	21.4	22.4	23.0	22.9	23.1	22.8
80,0°	16.8	15.0	14.0	15.7	16.3	14.4	14.0	14.5	15.8	15.9	15.5	15.5	15.5
82,5°	9.2	8.4	8.4	9.0	9.8	8.5	8.6	8.7	9.0	9.1	8.8	9.1	9.1
85,0°	4.1	4.0	3.9	4.1	4.5	4.1	4.0	4.1	3.9	3.9	3.8	3.7	3.6
87,5°	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.0	1.0	1.1	1.1	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779127G01AA</b> <b>EAN: 4058352851043</b>	<b>LP number</b> <b>59242_8</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
$\gamma$	Luminous intensity in cd/klm												
0,0°	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8
2,5°	90.6	90.5	90.5	90.5	90.5	91.0	91.5	91.4	91.4	91.3	91.1	90.9	90.8
5,0°	97.0	97.3	97.5	97.6	97.8	97.1	95.2	95.1	95.0	94.7	94.5	94.2	93.9
7,5°	115.3	115.6	115.6	115.5	115.4	115.6	100.2	100.0	99.8	99.5	99.1	98.7	98.2
10,0°	146.1	144.9	143.3	141.7	140.7	138.6	105.6	105.3	105.0	104.6	104.1	103.4	102.7
12,5°	186.9	182.6	178.1	174.1	171.5	171.1	111.6	111.1	110.6	110.0	109.2	108.4	107.5
15,0°	234.8	226.9	218.9	211.8	207.2	203.5	119.3	118.4	117.4	116.3	115.0	113.7	112.3
17,5°	295.5	281.5	268.1	256.9	249.9	253.2	132.0	129.4	127.2	124.7	122.1	119.6	117.2
20,0°	378.0	348.5	324.0	306.1	295.5	288.8	148.9	143.7	138.8	133.9	129.2	124.8	120.5
22,5°	483.5	442.8	394.0	359.9	342.6	342.5	167.4	159.4	150.6	142.1	134.3	127.2	117.8
25,0°	550.9	530.3	475.3	415.0	383.3	372.8	185.3	172.4	158.7	146.0	135.3	122.8	106.5
27,5°	568.0	568.5	541.2	474.2	418.0	404.5	192.6	174.7	157.4	143.0	129.9	111.7	90.8
30,0°	559.1	562.9	558.1	518.8	447.7	417.8	179.2	160.0	143.8	132.6	119.1	99.6	82.3
32,5°	545.2	540.7	542.3	535.6	479.5	439.2	151.0	135.0	124.0	117.5	107.2	93.8	80.9
35,0°	532.7	514.8	512.4	520.9	500.1	457.9	113.7	106.3	103.0	101.2	96.8	90.0	81.1
37,5°	526.3	498.0	489.1	503.8	507.6	491.0	89.5	87.2	87.0	87.2	88.3	85.8	79.6
40,0°	518.5	481.7	466.2	480.1	501.2	513.5	81.8	78.8	76.6	75.7	77.8	79.3	76.4
42,5°	507.6	465.9	442.4	452.3	490.2	542.3	77.9	74.4	71.1	68.4	68.1	70.6	70.5
45,0°	511.6	479.8	466.4	486.5	550.9	631.0	73.4	69.2	66.0	63.5	61.7	62.2	64.0
47,5°	585.1	596.8	618.7	664.4	802.2	1072.3	68.4	64.0	61.1	59.5	58.5	57.2	58.1
50,0°	811.9	865.0	897.1	942.5	1205.4	1551.1	64.0	59.7	57.3	56.0	55.3	54.2	54.0
52,5°	1069.4	1119.6	1142.1	1178.4	1521.9	2069.9	61.6	56.8	54.3	53.0	52.3	51.6	51.3
55,0°	1228.9	1261.2	1261.5	1283.4	1615.2	2171.9	60.0	55.1	52.1	50.8	49.5	49.0	49.2
57,5°	1152.5	1053.1	965.7	941.7	1046.1	1101.7	58.2	53.7	50.3	48.5	47.1	46.7	47.8
60,0°	663.1	519.9	400.3	320.4	250.2	237.0	55.2	52.5	49.2	47.0	46.3	46.7	49.1
62,5°	224.4	162.5	113.0	83.8	69.7	64.1	53.6	50.0	49.2	49.6	50.2	51.6	54.6
65,0°	69.9	62.0	56.1	53.5	51.6	52.0	55.0	49.9	51.9	55.1	58.6	61.6	63.8
67,5°	52.7	51.4	54.6	59.3	50.8	47.3	107.8	63.9	64.5	67.6	71.0	70.9	69.2
70,0°	45.5	46.1	72.5	82.0	52.1	42.8	265.1	114.3	76.8	71.5	67.9	62.6	57.9
72,5°	36.9	37.0	52.0	55.7	42.7	32.5	206.7	63.3	45.3	48.2	42.3	37.3	34.5
75,0°	29.1	28.7	34.3	37.2	30.5	25.1	69.9	29.5	25.0	25.6	24.2	23.1	23.3
77,5°	22.0	21.2	24.4	25.9	22.5	17.9	25.7	20.0	17.9	17.6	17.1	16.9	17.0
80,0°	15.1	14.5	15.9	16.4	14.7	13.0	16.8	14.1	12.4	11.8	11.4	11.2	11.1
82,5°	8.8	8.5	8.8	8.9	8.3	7.4	9.9	8.7	7.6	7.0	6.7	6.3	6.3
85,0°	3.5	3.4	3.3	3.3	3.2	3.4	4.2	4.0	3.6	3.2	3.0	2.9	2.7
87,5°	1.2	1.2	1.3	1.3	1.3	1.3	1.2	1.2	1.1	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779127G01AA</b> <b>EAN: 4058352851043</b>	<b>LP number</b> <b>59242_8</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		<b>siteco</b>

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	0.1	0.1
2,5°	90.6	90.4	90.2	90.1	90.0	89.9	89.9	89.9	89.9	89.8	89.9	1.1	1.2
5,0°	93.6	93.2	92.9	92.5	92.2	92.0	91.8	91.7	91.7	91.5	91.5	2.3	3.5
7,5°	97.6	96.9	96.3	95.7	95.2	94.7	94.3	94.1	93.8	93.6	93.6	3.7	7.2
10,0°	101.9	101.1	100.3	99.5	98.7	98.1	97.5	97.0	96.7	96.4	96.2	5.5	12.7
12,5°	106.5	105.5	104.3	103.2	102.2	101.2	100.2	99.4	98.7	98.0	97.7	7.9	20.6
15,0°	110.8	109.1	107.4	105.4	102.9	100.3	97.8	95.6	94.0	92.8	92.3	11.0	31.6
17,5°	114.8	111.6	105.9	98.3	90.9	85.4	81.8	79.6	78.0	76.7	76.0	14.8	46.4
20,0°	114.8	105.1	92.8	82.1	75.2	71.8	70.3	69.7	68.8	67.5	66.9	19.5	65.9
22,5°	104.2	88.8	77.3	72.6	70.6	69.0	67.8	67.3	66.7	65.8	65.3	24.7	90.6
25,0°	89.2	76.8	72.0	70.5	69.2	67.9	66.8	66.0	65.5	64.8	64.4	29.7	120.3
27,5°	76.9	70.8	69.7	69.0	68.1	67.1	65.7	64.4	63.5	62.8	62.4	34.3	154.6
30,0°	71.9	69.2	68.3	67.7	66.8	65.3	63.4	61.8	60.7	60.1	59.8	37.9	192.5
32,5°	72.4	68.3	66.8	65.7	64.4	62.9	61.3	59.8	59.0	58.6	58.3	40.3	232.9
35,0°	72.6	67.2	64.7	63.2	62.1	61.0	59.7	58.2	57.2	56.7	56.3	41.4	274.3
37,5°	72.1	65.4	62.2	61.1	60.5	59.3	58.2	57.2	56.6	56.1	55.8	41.9	316.2
40,0°	70.3	63.7	60.2	59.3	58.8	58.3	58.0	57.9	57.7	57.4	57.0	42.3	358.5
42,5°	66.7	61.7	58.5	57.7	58.1	59.0	59.7	60.3	60.6	60.2	59.9	42.9	401.5
45,0°	63.0	59.4	56.8	57.1	58.8	61.0	63.2	64.7	65.5	65.4	65.1	44.9	446.4
47,5°	59.3	57.2	56.0	57.5	60.6	64.6	68.7	71.4	72.5	72.7	72.5	51.9	498.3
50,0°	55.3	55.8	56.0	58.7	63.7	70.2	76.5	80.7	81.8	82.1	82.1	64.5	562.8
52,5°	52.4	54.9	56.6	60.9	68.2	77.5	86.3	91.1	92.0	91.9	92.0	79.7	642.5
55,0°	50.7	54.7	58.4	64.1	73.8	85.8	96.4	101.2	100.9	100.2	100.1	90.6	733.1
57,5°	50.6	55.4	61.1	68.5	80.1	93.6	104.7	108.4	106.3	104.5	104.1	77.5	810.6
60,0°	52.8	58.4	66.7	74.1	84.9	98.4	108.8	110.7	106.6	103.7	103.1	43.6	854.2
62,5°	58.4	65.0	80.6	89.5	87.7	99.2	107.7	107.4	101.3	97.4	96.4	23.9	878.1
65,0°	65.8	71.8	102.3	119.4	92.6	95.1	100.2	97.4	89.2	84.4	83.0	19.4	897.6
67,5°	68.0	70.4	111.1	138.4	101.7	85.1	85.3	81.6	74.2	71.7	69.5	22.2	919.7
70,0°	55.5	55.7	82.1	117.3	93.8	75.8	73.7	69.5	61.4	61.7	58.0	29.7	949.4
72,5°	36.4	39.0	47.1	64.2	63.4	60.8	59.8	54.4	47.5	49.2	46.7	24.9	974.3
75,0°	25.7	29.6	34.7	40.9	45.3	45.0	43.1	36.9	32.0	34.4	33.0	12.1	986.4
77,5°	18.1	21.0	23.8	26.7	29.4	30.9	29.2	24.5	21.7	22.1	21.7	6.3	992.8
80,0°	11.4	12.8	14.5	15.8	16.7	17.6	15.7	13.6	12.3	11.6	11.4	3.9	996.7
82,5°	6.4	6.8	7.3	7.3	7.8	7.8	6.6	5.8	5.3	5.1	5.1	2.1	998.8
85,0°	2.6	2.6	2.4	2.3	2.0	1.9	2.0	2.0	2.0	2.0	2.0	0.9	999.7
87,5°	1.0	1.1	1.1	1.1	1.1	1.2	1.2	1.2	1.3	1.3	1.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family <b>Floodlight FL11</b>	Order number: <b>5XA779127G01AA</b> EAN: <b>4058352851043</b>	LP number <b>59242_8</b>
----------------------------------	--	-----------------------------

<b>Dimming levels table</b>	environmental temperature: 10°C	<b>siteco</b>
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	175390	1425.5
95	232	251	166809	1297.9
90	213	248	157937	1188.0
85	196	245	149048	1090.3
80	181	242	140393	1003.6
75	167	239	131781	922.5
70	153	235	123092	842.9
65	139	232	113757	764.2
60	127	229	105558	696.9
55	115	225	96460	629.9
50	103	221	87915	563.3
45	90	216	78567	491.7
40	79	211	69779	431.9
35	69	206	61584	377.6
30	58	200	52506	317.3
25	47	192	43872	258.0
20	38	184	35236	210.5
15	28	173	26495	157.9
10	19	159	17823	111.2
5	9	132	8969	59.2
1	2	77	2405	21.2

<b>Dimming levels table</b>	environmental temperature: 25°C
-----------------------------	---------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	---	---	---	---
95	---	---	---	---
93	219	249	155365	1214.1
90	209	247	150820	1156.4
85	192	244	142229	1058.7
80	176	241	133907	966.7
75	162	238	125718	886.6
70	149	235	117406	813.3
65	135	231	108678	735.1
60	123	228	100720	668.6
55	112	224	92237	608.1
50	98	219	83506	530.4
45	88	215	75593	476.2
40	77	210	67116	416.8
35	66	205	58357	356.7
30	56	199	49979	303.2
25	46	192	42354	250.0
20	36	183	33159	197.8
15	27	172	25355	151.2
10	18	157	16887	104.4
5	8	127	7994	53.3
1	2	77	2385	20.9

**Photometric test report**

<b>Family</b> Floodlight FL11	<b>Order number: 5XA779127G01AA</b> <b>EAN: 4058352851043</b>	<b>LP number</b> 59242_8
----------------------------------	--	-----------------------------

<b>Luminousfluxs table</b>	<b>siteco</b>
----------------------------	---------------

Temperature °C	Luminous flux lm	Power consumption W
10.0	175390.0	1425.5
25.0	155930.0	1221.6