




# Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779426T01AA</b> <b>EAN: 4058352019535</b>	<b>LP number</b> <b>59517_5</b>
	<b>Version</b> standard bracket <b>Optic</b> asymmetric distribution PL33T <b>Cover</b> toughened safety glass <b>Lamps</b> LED 4000 K   CRI ≥ 70 <b>Controlgear</b> ECG-DALI <b>Rated values</b> Ta = 10 °C Net luminous flux = 211660 lm Power consumption = 1539.7 W Luminous efficacy = 137.5 lm/W	<b>serial documentation</b> 24.11.2023
		

**Luminous intensity in cd/klm** C180-0 C245-65 C250-70 C270-90 **Imax: 1561 cd/klm**

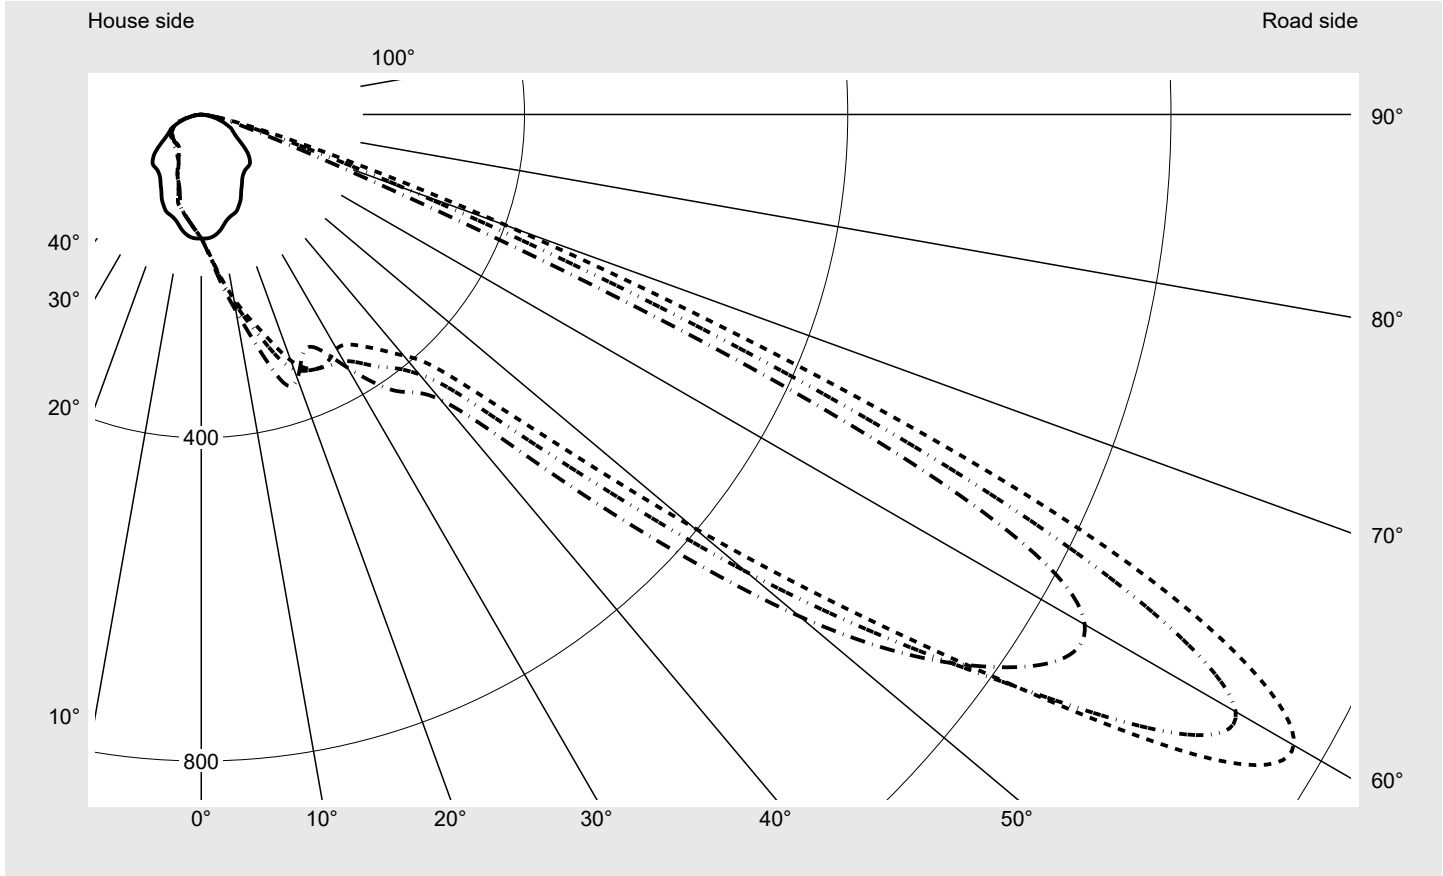

**Luminaire output ratios**

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

**Luminous intensity class acc. to EN13201-2**

Class:	G4
Imax 70°	438.4
Imax 80°	22.0
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0


**Measurement conditions**

DIN EN 13032 and DIN 5032

**Photometric test report**

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779426T01AA</b> <b>EAN: 4058352019535</b>	<b>LP number</b> <b>59517_5</b>
---	--	------------------------------------

**Envelope curve in cd/klm**      **KMK 60°**    **KMK 57.5°**    **KMK 55°**    **KMK 52.5°**      **siteco**

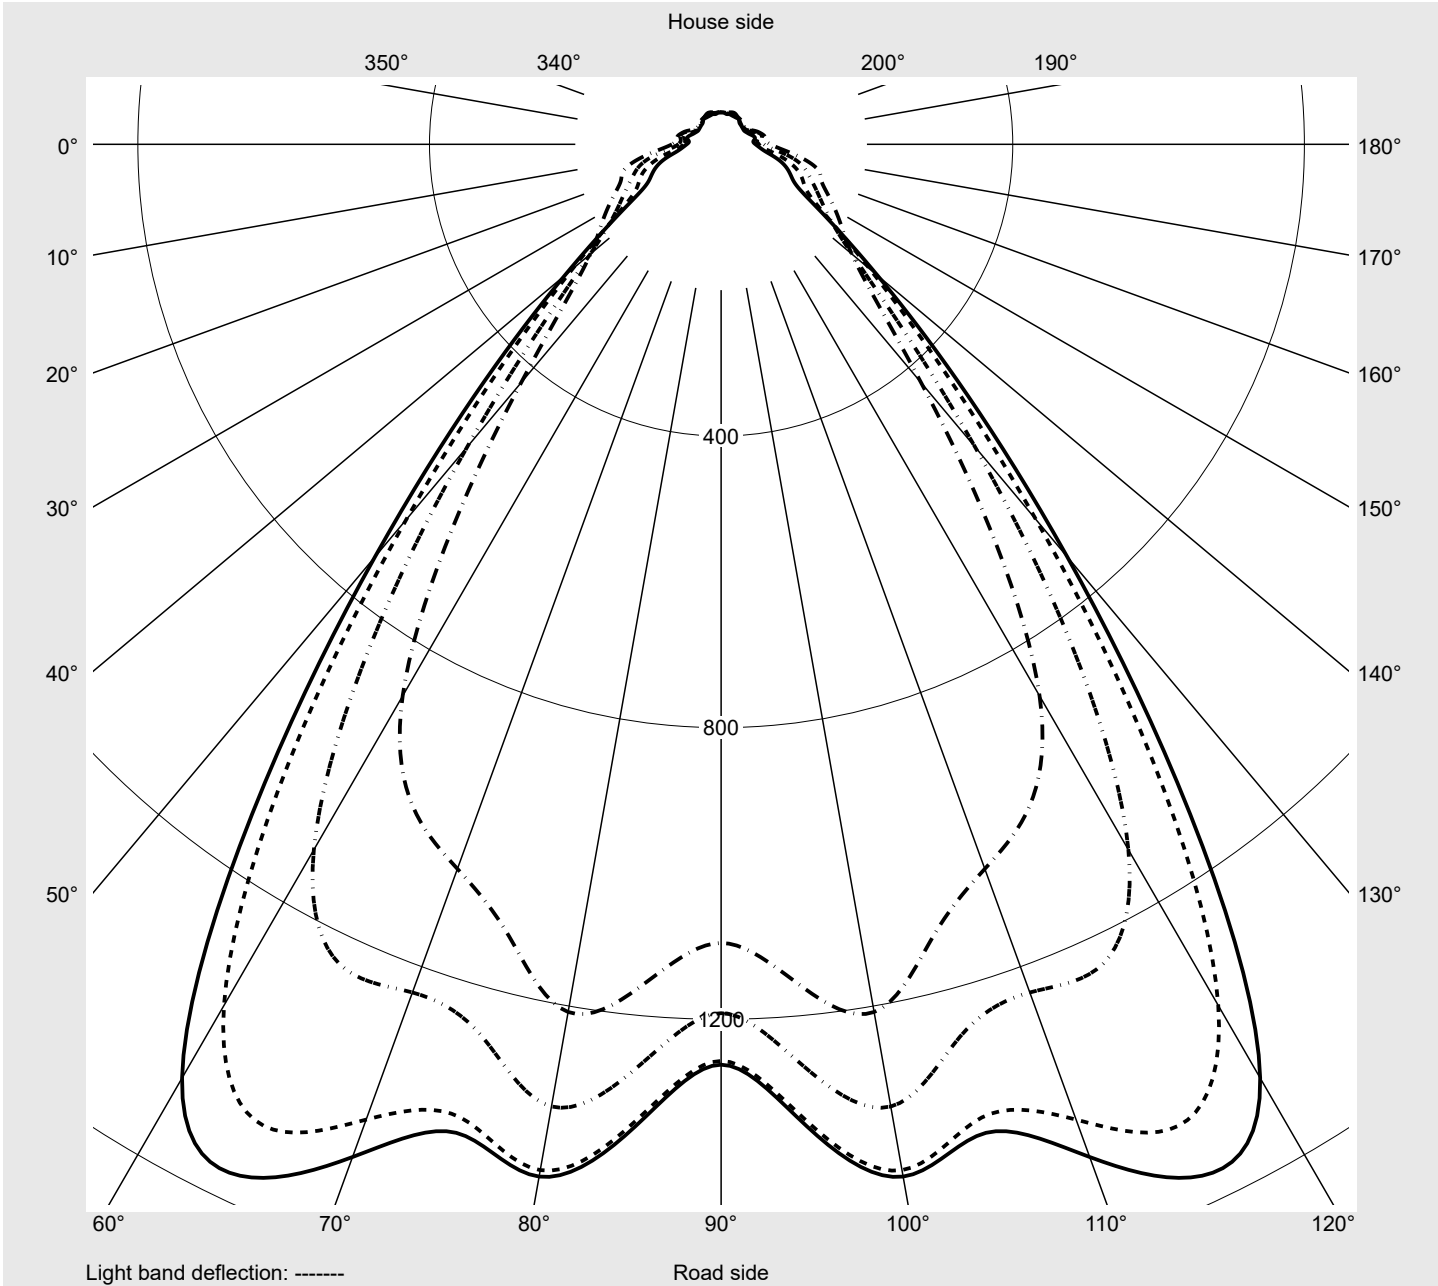

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779426T01AA</b> <b>EAN: 4058352019535</b>	<b>LP number</b> <b>59517_5</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		


C-planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5
2,5°	153.5	154.7	156.0	157.2	158.4	159.5	160.6	161.7	162.7	163.7	164.6	165.4	166.2
5,0°	152.2	154.7	157.5	160.4	163.2	166.0	168.9	171.8	174.6	177.3	179.8	182.2	184.4
7,5°	148.8	152.6	156.9	161.4	165.9	170.6	175.9	180.9	185.9	191.0	196.0	200.7	205.0
10,0°	143.5	148.0	153.6	159.8	166.5	173.4	180.8	188.8	196.8	204.4	211.8	218.7	225.1
12,5°	136.9	142.5	149.3	157.0	165.3	174.6	185.0	195.6	206.1	216.0	225.4	234.7	243.8
15,0°	132.4	139.4	147.4	156.2	165.8	176.6	188.6	201.1	213.3	225.3	237.2	248.9	261.0
17,5°	129.8	138.9	148.6	158.9	170.0	182.1	195.0	207.8	220.7	234.1	248.2	263.6	280.5
20,0°	127.4	138.0	149.7	162.4	175.8	189.2	202.6	216.6	231.7	247.4	265.4	285.7	306.3
22,5°	121.8	134.6	148.8	164.4	179.8	194.7	210.5	229.0	248.6	269.7	291.2	312.3	329.5
25,0°	115.4	128.3	144.2	162.3	179.5	196.7	217.6	241.2	264.8	286.9	307.6	325.1	338.1
27,5°	107.0	120.3	137.3	156.9	176.4	200.1	228.1	254.7	276.7	291.5	303.3	315.3	329.3
30,0°	100.5	112.4	130.0	152.0	177.7	209.2	242.0	270.6	283.9	285.3	286.8	295.9	313.6
32,5°	94.4	106.8	125.8	153.6	186.7	224.7	263.0	287.7	287.8	278.9	276.0	286.6	309.0
35,0°	90.6	102.5	125.1	157.8	197.1	241.6	281.0	294.7	287.3	277.3	277.0	293.5	320.0
37,5°	88.2	102.3	128.5	162.3	205.4	253.8	283.2	285.2	279.0	277.2	283.6	304.3	336.6
40,0°	87.1	102.6	129.4	167.8	212.0	255.2	271.2	268.6	270.6	280.5	293.2	316.4	352.3
42,5°	86.6	103.1	132.1	176.4	217.8	247.4	255.2	255.7	269.9	288.1	304.2	330.1	371.6
45,0°	85.2	102.9	135.1	178.0	211.2	227.5	236.8	250.0	272.6	292.9	312.1	352.6	419.7
47,5°	81.1	101.2	135.7	170.5	193.7	203.3	220.2	242.8	265.2	289.3	324.4	401.1	514.1
50,0°	75.5	96.5	130.7	157.0	169.6	180.7	202.2	225.7	248.3	284.1	357.0	499.5	672.6
52,5°	67.5	85.1	114.4	138.2	146.4	161.2	181.1	203.2	233.8	297.3	426.7	642.1	873.6
55,0°	58.9	70.4	95.7	116.2	129.0	142.9	159.9	185.0	234.4	340.3	541.8	838.2	1117.2
57,5°	51.9	57.8	76.4	97.8	114.3	124.8	140.4	183.1	266.7	417.4	671.9	1032.2	1363.8
60,0°	47.2	53.4	63.8	81.5	96.1	106.8	125.4	179.1	280.4	458.4	738.7	1121.7	1478.7
62,5°	43.7	49.2	55.7	67.7	80.2	91.2	111.0	164.1	263.8	433.5	687.6	1065.2	1453.7
65,0°	40.8	45.0	49.9	59.2	68.7	76.5	91.9	130.2	201.3	339.7	544.8	850.5	1236.6
67,5°	35.3	40.1	43.3	50.2	55.8	59.1	65.1	85.3	130.7	222.0	359.1	551.7	806.5
70,0°	30.2	34.6	38.1	42.9	45.0	44.1	45.3	54.9	81.1	138.7	228.3	341.7	438.4
72,5°	24.5	28.7	32.5	35.0	35.1	34.5	31.8	35.9	51.0	83.4	130.3	190.0	237.4
75,0°	19.4	22.3	25.7	26.9	25.7	26.2	22.6	24.7	33.2	53.0	80.9	114.0	134.8
77,5°	13.6	16.3	18.0	18.2	18.0	19.1	16.4	18.0	23.2	34.4	46.3	54.8	54.6
80,0°	9.1	10.4	11.2	9.6	11.2	12.0	10.2	11.6	13.8	14.2	11.7	12.6	15.7
82,5°	4.9	6.0	5.5	5.0	5.8	6.1	5.5	6.1	6.8	5.9	5.9	6.4	7.8
85,0°	2.1	2.4	2.2	2.2	2.2	2.4	2.2	2.4	2.5	2.5	2.7	2.9	3.2
87,5°	0.6	0.7	0.7	0.7	0.7	0.8	0.8	0.8	0.9	1.0	1.0	1.1	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779426T01AA</b> <b>EAN: 4058352019535</b>	<b>LP number</b> <b>59517_5</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
<b>siteco</b>		

C-planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5
2,5°	166.9	167.5	167.9	168.2	168.8	168.9	152.6	151.7	150.7	149.8	148.9	148.1	147.4
5,0°	186.3	188.0	189.3	190.2	191.3	191.5	150.2	148.3	146.7	145.1	143.6	142.5	141.5
7,5°	208.8	212.1	214.8	216.7	218.3	218.7	145.9	143.4	141.5	139.7	137.9	136.3	135.0
10,0°	231.0	236.2	240.4	243.5	246.0	246.7	139.5	136.7	134.6	132.5	130.5	129.3	128.3
12,5°	252.8	261.1	268.3	274.0	278.3	279.4	132.5	129.3	126.9	124.7	123.0	122.1	121.4
15,0°	273.5	286.1	297.8	307.8	315.3	317.7	127.1	123.5	120.2	117.9	116.3	115.0	113.5
17,5°	298.5	315.1	329.1	340.6	348.5	351.0	123.1	118.3	114.4	111.7	109.6	107.5	106.4
20,0°	324.0	335.4	341.5	345.2	347.5	347.9	118.7	112.6	108.3	105.2	102.6	100.9	99.8
22,5°	339.9	343.1	339.3	333.0	327.7	325.5	112.5	105.7	100.8	97.4	95.0	93.3	92.6
25,0°	346.1	346.4	339.3	329.1	320.7	317.3	104.8	97.7	92.8	89.5	87.3	85.6	77.4
27,5°	342.4	349.2	346.7	340.0	334.7	332.7	97.3	90.2	85.6	82.6	80.4	72.7	68.0
30,0°	334.8	352.6	361.4	361.9	361.0	361.6	91.0	84.4	80.2	77.6	73.3	64.6	63.0
32,5°	337.6	364.3	380.7	386.5	388.9	391.4	86.7	80.7	76.4	73.9	66.1	61.6	60.0
35,0°	350.3	380.8	400.8	409.8	413.8	417.1	83.0	78.2	74.3	70.9	63.0	60.4	57.6
37,5°	367.8	396.0	417.4	427.0	431.0	433.7	80.3	76.6	73.7	67.3	62.4	58.4	54.4
40,0°	389.5	419.7	441.8	455.1	459.5	461.1	78.4	74.4	72.1	63.9	59.0	55.4	52.1
42,5°	420.8	465.9	501.1	527.7	532.2	532.2	76.3	71.5	68.1	62.2	56.9	53.2	50.4
45,0°	495.0	564.9	622.6	666.4	664.2	658.6	73.9	68.2	63.4	59.3	54.1	50.9	48.8
47,5°	618.4	704.8	777.8	839.5	823.9	808.3	71.2	66.1	60.5	56.2	50.8	47.2	45.6
50,0°	795.0	880.6	957.4	1034.8	999.6	965.7	67.1	64.2	58.3	53.3	47.6	43.8	42.4
52,5°	1001.2	1057.5	1124.3	1208.4	1151.9	1095.4	61.5	60.9	57.0	52.0	45.9	41.6	40.2
55,0°	1239.9	1237.9	1266.8	1340.0	1266.8	1191.7	55.6	56.8	55.7	50.2	44.4	40.0	38.7
57,5°	1485.1	1423.5	1381.8	1428.6	1344.5	1257.2	49.4	51.6	51.0	45.9	41.3	38.5	37.7
60,0°	1560.9	1478.1	1403.6	1437.6	1352.2	1262.3	44.3	47.2	45.2	41.3	38.6	36.8	36.7
62,5°	1443.4	1316.9	1237.3	1277.1	1214.8	1141.6	40.2	43.6	41.2	38.2	38.0	34.7	34.7
65,0°	1162.2	977.8	893.2	903.2	851.1	796.1	35.6	39.6	37.9	35.1	37.7	33.5	32.3
67,5°	745.1	572.2	483.6	445.3	393.9	356.5	31.0	34.3	34.0	32.0	34.0	30.2	29.8
70,0°	403.1	275.5	207.6	185.5	164.2	149.9	27.1	28.2	29.4	27.6	28.2	25.8	26.1
72,5°	188.8	127.1	103.1	92.6	82.9	76.5	22.7	23.9	24.0	22.5	22.0	21.2	21.5
75,0°	91.4	68.9	61.6	56.0	49.6	47.0	17.3	17.3	17.5	17.6	18.7	19.3	17.4
77,5°	45.5	41.6	38.0	36.2	30.1	29.3	11.8	11.7	12.1	13.3	13.4	16.2	13.8
80,0°	20.0	22.0	21.6	21.0	17.8	16.6	7.6	7.9	8.2	8.4	9.1	9.7	8.9
82,5°	9.7	9.9	9.9	10.6	9.1	8.5	4.3	4.8	5.2	5.3	5.3	4.8	4.8
85,0°	3.4	3.5	3.5	3.8	3.7	3.6	2.0	2.2	2.6	2.5	2.5	2.2	2.4
87,5°	1.3	1.3	1.4	1.4	1.5	1.5	0.7	0.7	0.8	0.9	1.0	1.1	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

## Photometric test report

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779426T01AA</b> <b>EAN: 4058352019535</b>	<b>LP number</b> <b>59517_5</b>
<b>Table of values for luminous intensities</b>		<b>Maximum luminous intensity</b>
		

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	153.5	0.2	0.2
2,5°	146.7	146.1	145.6	145.1	144.8	144.6	144.5	144.2	144.1	144.3	144.3	1.9	2.1
5,0°	140.4	139.4	138.7	138.0	137.6	137.3	137.0	136.8	136.7	136.8	136.8	3.8	5.9
7,5°	133.9	133.0	132.2	131.6	131.0	130.7	130.4	130.2	129.9	130.0	130.0	5.8	11.7
10,0°	127.6	126.9	126.0	125.1	124.4	124.1	123.8	123.5	123.5	123.5	123.5	7.8	19.5
12,5°	120.3	119.5	118.9	118.3	117.8	117.5	117.2	117.1	116.9	117.0	116.9	9.9	29.4
15,0°	112.8	112.0	111.7	111.7	111.9	111.5	109.2	106.3	104.1	102.8	102.3	12.0	41.5
17,5°	105.4	104.8	104.4	100.3	95.6	93.4	92.2	91.6	91.3	91.2	91.3	14.2	55.7
20,0°	99.1	93.9	87.9	86.9	86.8	86.0	85.0	84.2	84.0	84.3	84.4	16.2	71.9
22,5°	84.6	80.6	80.5	80.1	79.0	77.2	75.5	74.4	74.3	74.7	75.0	18.1	90.0
25,0°	74.4	74.2	73.7	72.7	70.7	68.1	65.9	65.0	65.4	66.1	66.2	19.7	109.6
27,5°	67.7	67.3	66.5	65.5	63.5	60.7	58.7	58.5	59.3	60.6	61.8	21.1	130.8
30,0°	62.5	61.8	60.9	59.9	58.2	55.7	54.1	54.0	55.0	57.5	59.1	22.7	153.4
32,5°	59.1	58.1	56.8	55.7	53.9	51.4	50.2	50.6	52.7	54.2	55.1	24.6	178.0
35,0°	55.4	54.0	52.7	51.5	50.2	48.8	48.4	50.2	51.3	52.2	53.5	26.8	204.8
37,5°	52.0	50.9	49.8	49.0	48.3	47.5	48.0	49.5	50.0	51.4	52.7	28.9	233.8
40,0°	49.6	48.7	48.4	47.4	46.9	46.9	47.8	48.7	49.5	50.5	51.9	31.2	264.9
42,5°	47.9	47.0	46.8	46.3	46.9	47.0	47.5	48.1	48.7	50.0	51.3	34.4	299.4
45,0°	47.1	45.9	46.2	46.1	47.1	47.4	47.1	47.3	47.6	48.7	49.8	39.5	338.9
47,5°	45.0	44.4	44.4	45.0	46.0	46.5	46.1	46.2	46.2	46.7	47.5	46.0	384.8
50,0°	42.2	42.4	43.1	44.4	45.1	46.4	46.2	45.9	45.3	45.1	45.5	54.2	439.1
52,5°	39.9	40.9	42.7	43.5	44.4	46.3	46.6	45.5	44.6	44.2	44.4	63.3	502.4
55,0°	38.6	39.7	41.9	42.7	44.3	45.5	46.0	44.6	43.9	43.7	43.7	73.4	575.8
57,5°	37.7	38.8	40.3	42.6	43.6	44.1	44.3	43.7	43.2	44.3	44.2	83.8	659.6
60,0°	37.1	37.8	39.0	41.9	41.9	42.0	42.3	42.8	42.2	43.6	43.8	88.5	748.1
62,5°	35.3	36.0	37.3	38.7	39.6	39.7	40.2	40.6	39.9	40.7	40.9	83.1	831.2
65,0°	32.7	34.0	35.1	35.5	36.2	38.3	38.5	38.9	38.5	37.7	37.8	66.0	897.2
67,5°	30.0	31.7	32.4	32.7	33.6	36.0	36.4	37.5	37.3	36.0	35.7	41.6	938.7
70,0°	26.7	28.8	28.1	29.0	30.7	32.1	33.6	35.6	35.1	34.4	34.3	24.3	963.1
72,5°	22.7	24.0	22.5	23.6	25.5	27.4	29.7	32.1	32.0	31.6	31.5	14.7	977.8
75,0°	17.5	18.2	18.7	19.6	21.2	23.0	25.5	27.2	26.0	23.6	22.4	9.7	987.5
77,5°	13.1	13.8	14.6	15.7	16.8	18.1	20.1	19.5	17.1	16.5	16.4	6.1	993.6
80,0°	8.7	10.1	10.8	11.9	12.2	12.7	13.4	12.7	12.1	12.1	12.0	3.3	996.9
82,5°	5.4	6.5	7.4	8.0	8.4	8.6	8.9	8.6	8.2	8.1	8.1	1.9	998.8
85,0°	2.7	3.4	4.1	4.1	4.2	4.5	4.3	4.1	4.1	4.2	4.3	0.8	999.6
87,5°	1.4	1.5	1.7	1.8	2.0	2.2	2.3	2.4	2.5	2.6	2.6	0.4	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

## Photometric test report

Family <b>Floodlight FL11</b>	Order number: <b>5XA779426T01AA</b> EAN: <b>4058352019535</b>	LP number <b>59517_5</b>
----------------------------------	--	-----------------------------

**siteco**

### Dimming levels table environmental temperature: 10°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	252	254	210372	1527.1
95	238	252	201139	1440.1
90	222	249	190154	1341.7
85	207	247	179652	1249.9
80	193	244	169406	1164.6
75	178	241	158580	1073.6
70	165	238	148501	995.2
65	151	235	137442	910.9
60	138	232	126964	833.1
55	125	228	116310	755.6
50	113	224	106124	683.9
45	100	220	94917	607.2
40	88	215	84276	536.5
35	77	210	74384	472.1
30	65	204	63208	402.0
25	54	197	52981	337.2
20	43	189	42568	274.4
15	32	178	32146	213.4
10	21	163	21149	145.6
5	10	136	10382	76.6
1	3	91	2964	32.4

### Dimming levels table environmental temperature: 25°C

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
91	225	250	187394	1350.6
90	221	249	184762	1326.3
85	206	246	174727	1234.9
80	191	244	164176	1144.2
75	176	241	153673	1053.4
70	163	238	143990	975.6
65	149	235	133403	891.7
60	136	231	123218	814.5
55	123	228	112792	737.8
50	111	224	102870	666.6
45	98	219	91922	590.2
40	87	215	82377	525.9
35	75	209	71857	456.2
30	64	204	61712	392.7
25	53	197	51611	328.5
20	42	188	41384	266.3
15	31	177	31015	206.1
10	20	161	20065	137.0
5	10	136	10353	75.8
1	3	92	2958	32.0

**Photometric test report**

<b>Family</b> <b>Floodlight FL11</b>	<b>Order number: 5XA779426T01AA</b> <b>EAN: 4058352019535</b>	<b>LP number</b> <b>59517_5</b>
---	--	------------------------------------

**Luminousfluxs table**



Temperature °C	Luminous flux lm	Power consumption W
10.0	211660.0	1539.7
25.0	188700.0	1362.6