

Photometric test report

Family
DL 11 iQ

Order number: 5XA5565AF108P00022
EAN: 4058352955642

LP number
59375_86

serial
documentation
01.02.2024



Version luminaire insert LED, Siteco® metallic grey (DB 702S), post-top- or mounting to wall arm
Optic asymmetric, wide distribution (ST1.2a)
Cover cover transparent, PMMA
Lamps LED 2200 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Rated values Net luminous flux = 3810 lm
Power consumption = 33.6 W
Luminous efficacy = 113.4 lm/W

siteco

Luminous intensity in cd/klm


C180-0

C200-20

C205-25

C270-90

Imax: 769 cd/klm

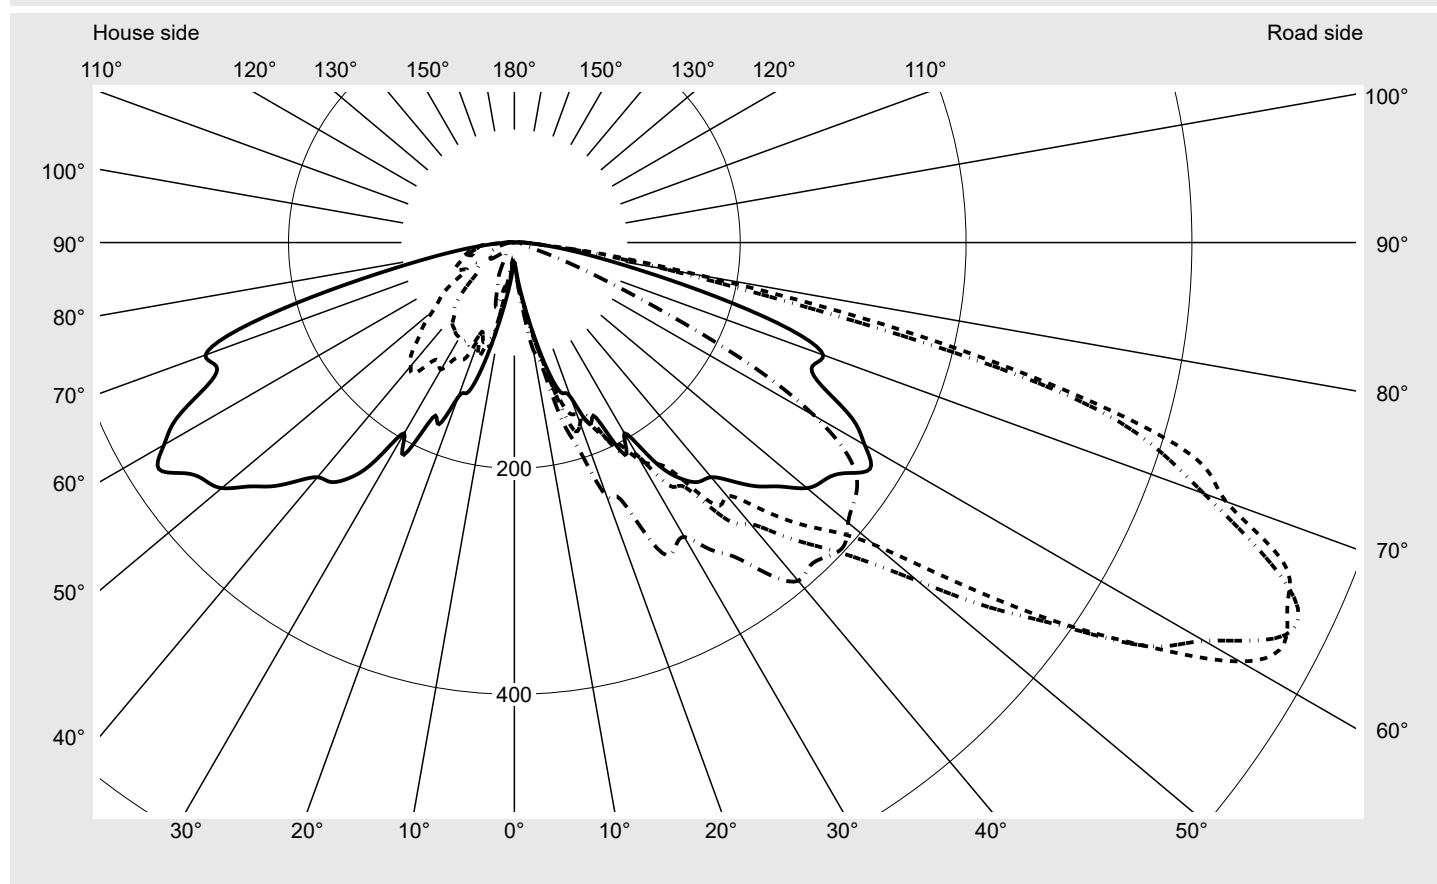

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	98.8%
Eta 90° - 180°	1.2%

Luminous intensity class acc. to EN13201-2

Class:	G1
Imax 70°	670.6
Imax 80°	166.8
Imax 90°	10.3
Imax >90°	5.5
Imax >95°	4.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
DL 11 iQ

Order number: 5XA5565AF108P00022
EAN: 4058352955642

LP number
59375_86

Envelope curve in cd/klm

KMK 62.5°


KMK 60°

KMK 57.5°

KMK 55°

sit

eco

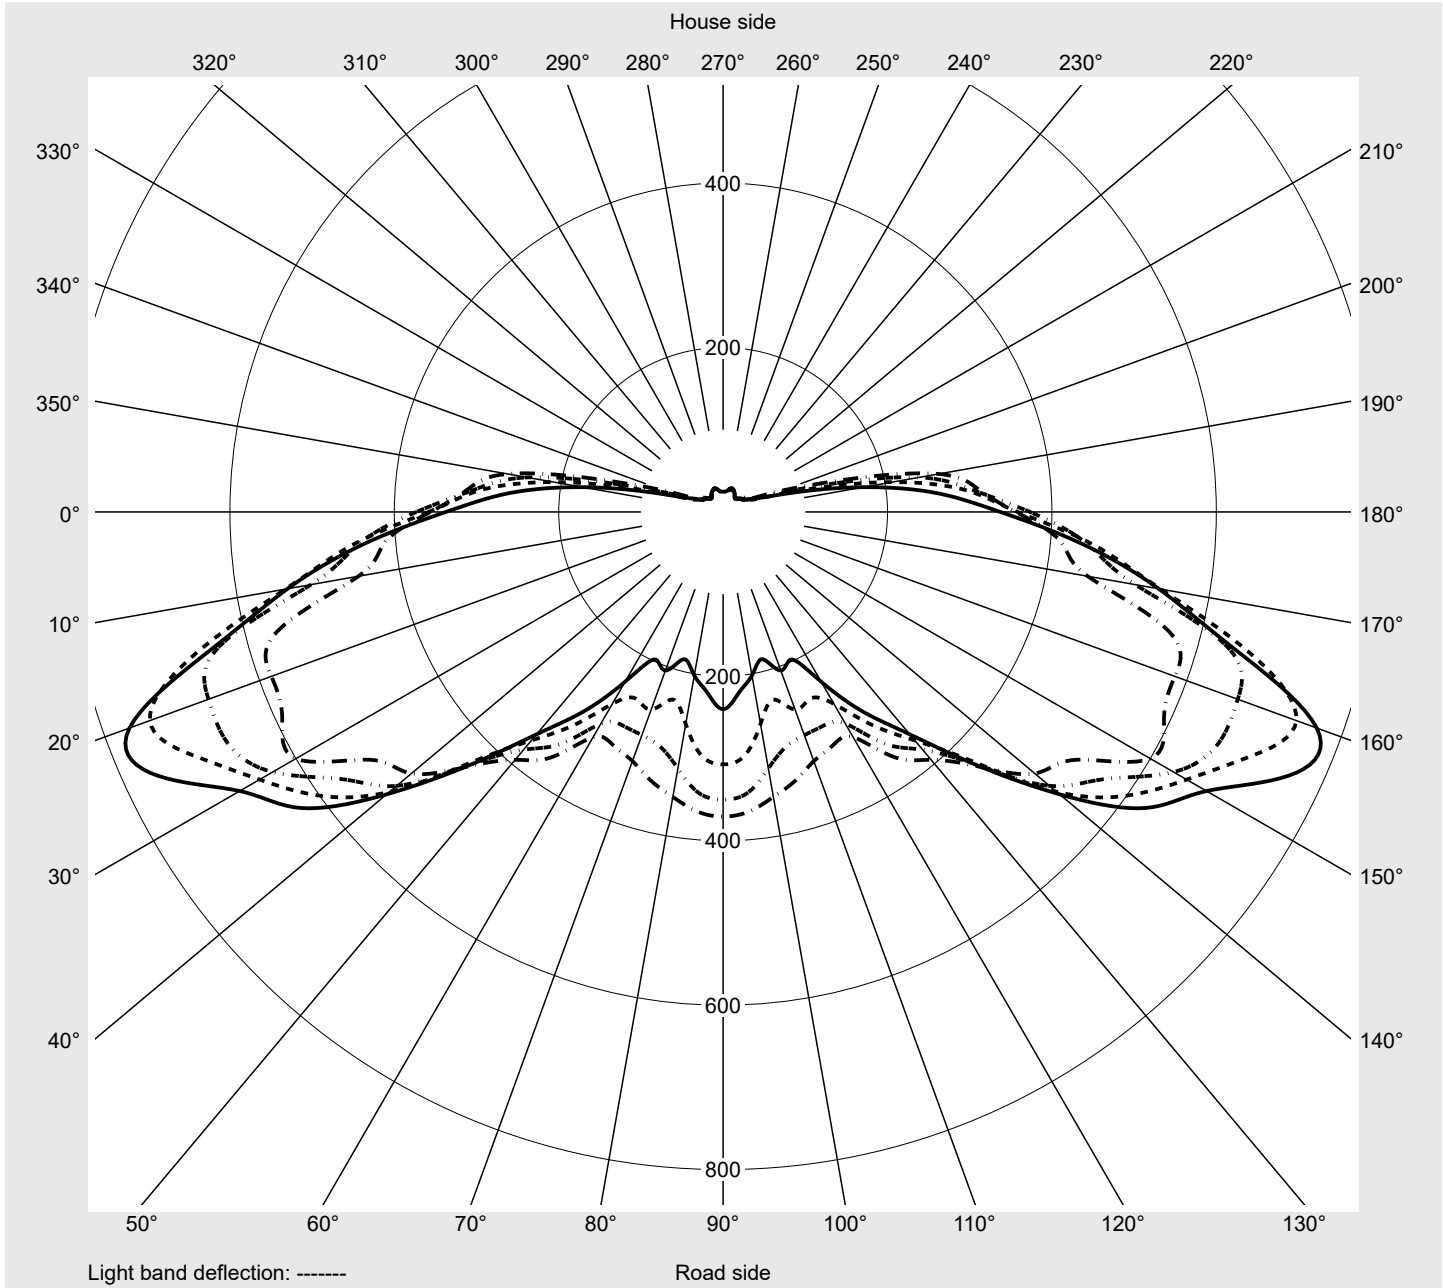

Photometric test report

Family DL 11 iQ	Order number: 5XA5565AF108P00022 EAN: 4058352955642	LP number 59375_86
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1
2,5°	20.5	19.5	19.6	20.2	20.8	21.5	22.2	23.0	22.8	22.6	22.7	22.7	22.4
5,0°	31.2	33.0	35.2	36.8	38.0	38.5	38.0	36.5	36.5	34.9	35.7	36.1	36.9
7,5°	45.2	45.1	45.8	47.8	47.7	48.3	50.4	49.7	49.4	52.0	52.7	53.4	54.4
10,0°	64.6	66.7	67.0	63.5	67.2	72.4	75.5	73.4	76.0	73.8	75.5	78.7	79.8
12,5°	91.1	94.9	94.9	102.6	96.0	97.3	90.6	87.7	84.8	91.6	101.6	107.7	111.3
15,0°	120.9	125.4	152.5	131.3	129.9	134.9	132.9	140.9	144.9	145.5	135.5	131.1	136.7
17,5°	139.7	142.8	153.8	159.8	157.1	173.3	154.7	141.3	140.7	143.7	148.3	151.1	158.5
20,0°	145.7	154.9	159.9	166.6	161.7	170.3	168.5	161.2	162.4	174.0	159.5	164.2	167.0
22,5°	174.1	171.2	179.5	165.1	173.1	165.9	165.4	170.5	182.3	173.1	179.9	195.4	200.6
25,0°	170.9	179.0	188.5	188.9	191.0	190.3	195.4	183.7	188.1	195.8	183.6	194.6	214.1
27,5°	211.9	206.1	196.7	198.6	201.2	211.7	215.5	210.5	209.0	219.6	208.0	211.1	229.1
30,0°	195.1	212.5	233.6	231.3	222.8	217.3	222.0	215.1	224.5	230.2	222.9	220.6	244.4
32,5°	228.6	216.0	203.5	218.0	232.4	255.0	260.8	255.0	271.0	274.9	256.1	255.3	276.0
35,0°	254.4	266.3	272.3	262.1	251.2	265.0	275.3	273.2	278.0	293.6	291.5	274.6	294.4
37,5°	267.2	263.1	260.8	271.7	293.0	309.3	289.8	287.1	299.2	312.6	312.0	297.6	321.7
40,0°	271.3	276.2	274.3	281.0	293.0	325.4	347.9	331.8	324.3	328.7	320.5	307.4	333.2
42,5°	287.0	284.5	287.3	298.0	318.0	352.3	369.2	349.5	350.9	371.7	359.0	328.3	338.4
45,0°	305.4	298.9	309.1	316.9	350.4	380.6	384.3	378.1	378.1	383.9	367.3	335.6	348.8
47,5°	319.7	314.0	338.2	352.1	377.7	414.7	419.2	417.2	399.5	396.0	382.6	353.6	365.0
50,0°	338.3	348.8	377.1	400.8	416.8	466.2	472.2	450.2	425.1	417.4	396.6	363.4	357.0
52,5°	345.7	374.3	422.4	489.1	494.7	530.7	525.6	501.1	451.4	435.7	405.3	373.7	345.0
55,0°	356.1	412.3	450.4	561.6	584.8	591.8	600.2	525.5	495.1	437.5	393.6	364.4	316.3
57,5°	373.3	444.7	509.2	635.5	666.2	665.2	632.8	566.5	518.4	434.8	377.5	344.5	297.3
60,0°	358.2	451.1	540.6	663.7	742.1	705.5	651.2	601.3	529.6	428.9	362.8	316.5	269.6
62,5°	337.3	436.7	538.0	644.0	768.6	759.1	679.0	627.8	534.3	435.0	353.1	296.6	238.4
65,0°	300.4	388.3	534.2	661.6	755.4	765.5	698.4	609.5	519.5	428.4	337.5	280.2	210.8
67,5°	285.7	339.7	496.1	630.1	736.2	715.5	677.5	590.6	494.9	397.3	323.1	259.3	181.3
70,0°	290.9	360.7	477.8	628.0	670.6	649.7	636.9	528.9	440.6	366.8	295.3	228.8	158.0
72,5°	256.2	369.0	419.6	582.0	631.0	589.9	501.1	444.8	365.2	282.3	224.5	174.3	133.9
75,0°	184.2	300.6	381.2	494.0	504.5	480.2	362.2	321.0	229.6	188.2	181.3	164.0	127.5
77,5°	116.8	178.9	256.2	331.5	334.6	268.3	206.8	175.0	148.0	129.3	127.4	121.4	104.7
80,0°	73.4	97.3	132.9	158.7	166.8	137.5	130.6	129.7	102.1	68.2	52.9	41.1	39.7
82,5°	45.3	51.0	62.0	72.8	81.0	66.8	82.8	93.7	66.4	43.1	25.3	18.2	10.9
85,0°	25.6	27.4	25.8	26.5	25.5	31.0	51.1	59.1	39.2	21.2	15.5	11.2	8.5
87,5°	12.1	12.7	13.2	14.5	15.3	15.0	15.2	12.9	11.3	9.2	8.3	7.3	6.5
90,0°	9.0	8.4	8.6	8.8	8.8	8.6	8.6	7.4	6.8	6.2	5.8	5.6	5.5
92,5°	5.3	5.4	5.5	5.5	5.5	5.5	5.4	5.3	5.3	5.1	5.1	4.9	4.9
95,0°	4.5	4.6	4.6	4.6	4.6	4.4	4.4	4.3	4.2	4.2	3.9	3.8	3.7
97,5°	3.8	3.9	4.0	3.9	3.8	3.8	3.8	3.7	3.6	3.5	3.4	3.3	3.1
100,0°	3.6	3.6	3.6	3.6	3.5	3.4	3.4	3.1	3.1	2.9	2.9	2.9	2.9
102,5°	3.1	3.1	3.1	3.1	3.1	2.9	2.9	2.9	2.7	2.7	2.7	2.6	2.5
105,0°	2.9	2.9	2.9	2.9	2.8	2.7	2.7	2.5	2.5	2.5	2.5	2.2	2.2
107,5°	2.7	2.7	2.7	2.7	2.6	2.5	2.5	2.2	2.2	2.2	2.2	2.0	2.0
110,0°	2.5	2.5	2.5	2.5	2.4	2.2	2.2	2.1	2.0	2.0	2.0	2.0	2.0
112,5°	2.4	2.4	2.2	2.2	2.1	2.1	2.0	2.0	2.0	1.9	1.8	1.8	1.8

Photometric test report

Family DL 11 iQ	Order number: 5XA5565AF108P00022 EAN: 4058352955642	LP number 59375_86
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1
2,5°	22.3	22.6	22.8	23.1	23.2	23.3	19.8	19.6	19.8	20.0	20.2	20.3	20.0
5,0°	37.3	37.8	38.9	39.2	39.6	39.5	28.3	25.0	23.6	21.7	18.9	18.7	18.9
7,5°	56.5	58.0	58.7	61.7	62.6	62.6	43.2	42.1	43.4	43.0	40.7	36.1	34.3
10,0°	83.1	85.7	87.3	91.4	95.8	96.7	61.7	51.5	51.1	47.9	47.8	47.4	48.0
12,5°	116.0	113.4	109.3	108.8	109.5	110.2	88.8	99.4	89.3	91.5	80.8	80.2	68.5
15,0°	131.8	132.2	141.0	151.8	156.1	162.5	107.3	94.6	90.0	92.7	88.8	87.3	79.8
17,5°	166.2	184.3	199.0	201.1	193.5	194.4	128.2	117.5	108.4	106.4	91.8	78.7	73.8
20,0°	174.4	188.8	217.5	245.4	247.2	239.3	125.6	122.1	105.5	92.0	84.1	78.1	71.7
22,5°	209.5	225.4	249.0	257.1	254.3	246.2	170.9	153.2	132.8	108.9	99.2	74.2	57.4
25,0°	235.2	247.1	268.8	296.2	300.3	298.3	166.3	166.8	148.6	113.4	96.2	71.8	49.4
27,5°	247.2	253.3	284.5	301.7	304.9	306.6	183.5	159.4	140.2	117.2	98.8	79.9	45.0
30,0°	269.2	274.1	297.2	304.6	299.3	301.0	202.9	197.5	172.1	129.6	97.3	66.9	38.4
32,5°	290.6	294.5	310.1	317.6	318.6	322.1	220.2	192.4	166.9	124.7	96.0	59.0	35.7
35,0°	309.0	322.0	336.4	339.4	337.9	339.6	247.0	218.7	181.8	129.7	92.9	53.2	34.5
37,5°	334.8	355.3	357.1	358.4	361.6	370.6	252.9	224.1	183.2	146.3	90.0	51.9	36.3
40,0°	350.3	374.0	365.8	368.8	375.6	391.0	259.4	240.3	179.1	142.8	82.0	47.9	36.9
42,5°	356.8	374.1	369.2	375.9	382.4	387.9	275.8	244.7	179.3	135.5	78.6	44.0	38.8
45,0°	368.8	378.8	372.4	382.8	389.3	392.8	296.4	256.3	182.6	120.5	69.4	44.6	41.3
47,5°	379.1	373.2	378.9	392.6	395.5	396.4	303.5	258.6	178.6	109.3	57.0	44.9	41.6
50,0°	371.4	360.8	367.2	382.6	386.3	385.9	306.8	262.5	169.8	94.2	45.0	41.3	37.4
52,5°	350.6	345.7	358.5	368.1	379.7	378.7	306.4	267.6	162.2	83.9	40.2	36.7	33.2
55,0°	314.1	322.6	338.6	352.1	365.6	370.6	312.2	266.3	149.4	75.3	39.7	33.6	30.4
57,5°	287.2	288.9	295.6	316.8	343.0	349.9	305.3	242.1	126.7	60.6	36.7	31.0	28.2
60,0°	250.6	255.8	236.2	261.9	297.9	307.1	298.2	209.1	106.2	48.9	35.2	29.7	28.1
62,5°	198.0	205.3	185.4	202.0	220.6	240.0	261.6	173.5	93.4	52.0	38.0	28.7	27.5
65,0°	165.0	153.0	129.3	144.6	156.0	150.6	222.4	145.5	91.8	57.6	37.7	30.4	28.6
67,5°	136.1	105.8	75.9	85.2	88.9	85.3	201.1	132.5	87.0	55.7	37.1	32.3	29.1
70,0°	112.6	75.6	42.1	36.6	39.3	45.1	193.2	131.9	83.7	51.5	37.9	32.4	29.3
72,5°	93.0	45.0	24.1	17.2	16.2	17.3	170.4	131.1	82.2	48.0	38.3	32.0	29.0
75,0°	71.0	20.3	14.7	11.4	10.9	10.6	129.3	97.1	74.1	46.9	42.4	34.7	31.0
77,5°	32.7	12.9	10.0	8.8	8.6	8.5	78.5	64.8	62.7	42.4	39.4	35.6	31.4
80,0°	11.4	8.6	7.6	7.4	7.3	7.2	58.6	56.5	51.7	40.1	35.4	33.8	30.5
82,5°	8.1	6.8	6.4	6.2	6.2	6.1	42.9	41.9	38.4	32.8	32.2	31.2	28.8
85,0°	6.7	6.2	5.8	5.5	5.4	5.4	23.9	25.8	27.5	28.6	29.0	27.7	24.9
87,5°	5.9	5.5	5.2	4.8	4.6	4.5	11.6	11.8	11.8	13.6	14.8	16.5	15.9
90,0°	5.3	5.1	4.8	4.4	4.3	4.0	8.6	8.4	8.3	8.5	9.5	10.3	8.4
92,5°	4.8	4.6	4.4	3.9	3.8	3.8	5.3	5.2	5.1	4.9	4.8	4.8	4.7
95,0°	3.6	3.5	3.4	3.4	3.4	3.4	4.4	4.4	4.2	4.2	4.0	3.9	3.8
97,5°	3.1	3.1	3.1	3.0	2.9	2.9	3.8	3.8	3.6	3.5	3.5	3.3	3.3
100,0°	2.7	2.7	2.7	2.7	2.7	2.7	3.4	3.4	3.3	3.3	3.1	3.0	3.0
102,5°	2.5	2.5	2.5	2.5	2.5	2.5	3.1	3.1	2.9	2.9	2.9	2.8	2.8
105,0°	2.2	2.2	2.2	2.2	2.2	2.2	2.9	2.8	2.7	2.7	2.7	2.6	2.6
107,5°	2.0	2.0	2.0	2.0	2.0	2.0	2.7	2.6	2.5	2.5	2.5	2.5	2.4
110,0°	2.0	2.0	2.0	2.0	2.0	2.0	2.5	2.5	2.4	2.2	2.2	2.2	2.4
112,5°	1.8	1.8	1.8	1.8	1.8	1.8	2.4	2.2	2.2	2.2	2.2	2.2	2.2

Photometric test report

Family DL 11 iQ	Order number: 5XA5565AF108P00022 EAN: 4058352955642	LP number 59375_86
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
0,0°	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	19.1	0.0	0.0
2,5°	20.1	20.4	20.8	20.7	20.5	20.7	21.4	22.3	22.8	22.9	22.9	0.3	0.3
5,0°	20.0	20.8	21.4	21.5	21.7	21.9	21.9	22.3	22.8	23.2	23.3	0.7	1.0
7,5°	31.0	31.6	36.7	36.1	35.4	31.9	27.6	23.8	21.2	19.5	19.1	1.5	2.5
10,0°	48.6	43.4	43.8	46.7	44.7	38.9	37.3	37.8	36.7	36.7	37.9	2.9	5.5
12,5°	59.8	61.6	65.4	68.8	62.0	56.3	52.0	45.9	43.2	43.0	41.1	5.0	10.5
15,0°	75.1	66.6	65.0	67.2	65.1	58.6	56.0	51.2	51.3	57.6	58.1	7.6	18.0
17,5°	70.9	66.4	63.7	64.9	59.9	52.5	54.2	56.7	51.6	54.7	54.5	9.9	28.0
20,0°	61.8	56.6	56.5	56.6	54.2	52.4	44.6	44.7	38.6	43.7	44.4	11.8	39.7
22,5°	48.4	44.2	43.9	43.8	41.4	39.8	35.8	35.4	32.8	34.6	36.6	14.1	53.8
25,0°	38.3	35.6	34.2	32.9	31.4	31.2	29.9	29.0	29.3	33.4	32.5	16.5	70.3
27,5°	36.4	32.1	29.5	28.1	27.3	26.0	27.3	23.5	23.2	24.5	25.1	18.9	89.2
30,0°	33.6	30.2	28.1	26.7	24.6	23.1	22.8	19.5	18.0	18.6	18.4	21.5	110.7
32,5°	32.5	30.3	28.1	26.0	23.6	21.0	19.5	17.6	15.5	15.3	15.5	24.7	135.4
35,0°	31.8	29.1	27.0	24.5	21.7	19.1	17.7	15.9	14.3	13.8	13.9	28.6	164.0
37,5°	33.1	28.5	25.3	23.3	21.3	18.6	16.7	15.0	13.5	12.7	13.0	32.2	196.1
40,0°	33.4	30.0	24.9	22.0	19.4	17.6	16.0	14.6	13.2	12.5	12.6	35.5	231.6
42,5°	35.0	29.7	24.8	22.2	18.9	16.9	15.4	14.0	12.9	12.2	12.1	38.8	270.4
45,0°	36.4	29.9	24.5	21.0	18.5	17.2	15.5	13.9	12.7	11.8	11.7	42.2	312.7
47,5°	35.5	29.2	23.9	21.9	20.3	18.5	16.7	14.7	12.9	11.7	11.4	45.9	358.5
50,0°	32.1	26.5	22.7	23.0	23.8	22.8	21.2	19.4	17.1	15.4	15.0	49.5	408.0
52,5°	28.6	24.2	22.3	24.5	26.0	25.8	25.3	24.5	22.6	20.8	20.4	53.6	461.6
55,0°	26.7	23.7	22.3	24.9	27.4	28.3	28.3	27.3	25.5	24.9	25.1	57.1	518.6
57,5°	25.7	23.8	22.8	25.0	27.3	29.0	29.9	28.5	26.0	24.9	25.1	59.6	578.2
60,0°	24.9	22.4	21.8	24.8	27.8	30.0	30.4	28.7	26.3	24.8	24.7	60.1	638.3
62,5°	24.7	22.6	21.8	23.9	27.3	29.6	30.9	28.7	25.9	24.8	24.7	58.9	697.2
65,0°	25.6	23.2	22.3	23.2	25.5	27.3	29.2	27.5	24.9	24.9	24.7	56.5	753.8
67,5°	26.3	23.9	23.8	23.6	24.8	25.6	26.4	24.8	22.7	21.9	22.2	52.7	806.5
70,0°	27.8	25.0	24.6	23.1	22.6	22.6	21.9	21.4	20.7	20.2	20.9	49.1	855.6
72,5°	27.0	26.2	24.6	22.9	20.8	18.9	18.1	17.5	17.3	17.5	17.7	43.1	898.6
75,0°	28.6	25.8	24.0	22.2	18.4	15.0	15.0	15.0	15.0	15.2	15.3	34.6	933.3
77,5°	28.6	26.4	23.1	20.7	15.0	11.8	12.0	12.1	12.6	12.8	12.6	23.1	956.4
80,0°	26.9	24.2	22.6	17.6	13.1	9.3	9.4	9.7	10.0	10.1	9.7	13.8	970.2
82,5°	26.5	21.9	19.6	14.8	11.8	7.4	7.5	7.6	7.7	8.1	7.6	8.6	978.8
85,0°	20.9	18.3	15.2	11.1	9.1	6.2	6.2	6.3	6.3	6.4	5.8	5.3	984.1
87,5°	13.2	12.6	10.7	8.1	6.4	5.5	5.3	5.2	5.3	5.5	4.7	2.7	986.8
90,0°	7.4	7.2	6.7	5.8	5.3	4.8	4.8	4.7	4.6	4.8	4.3	1.9	988.7
92,5°	4.7	4.7	4.6	4.5	4.4	4.3	4.2	4.2	3.9	4.0	3.6	1.3	990.0
95,0°	3.8	3.7	3.7	3.5	3.4	3.3	3.1	3.0	2.9	2.8	2.5	1.0	991.1
97,5°	3.3	3.3	3.0	2.9	2.8	2.8	2.7	2.6	2.5	2.5	2.2	0.9	992.0
100,0°	2.9	2.8	2.8	2.7	2.7	2.6	2.4	2.4	2.2	2.2	2.0	0.8	992.8
102,5°	2.7	2.6	2.6	2.5	2.5	2.4	2.2	2.1	2.0	2.0	2.0	0.7	993.5
105,0°	2.6	2.6	2.5	2.4	2.2	2.1	2.1	2.0	2.0	1.9	1.8	0.7	994.1
107,5°	2.4	2.4	2.2	2.2	2.1	2.1	2.0	1.9	1.8	1.8	1.8	0.6	994.7
110,0°	2.2	2.2	2.2	2.1	2.0	2.0	1.9	1.8	1.8	1.8	1.8	0.6	995.3
112,5°	2.2	2.2	2.1	2.0	2.0	1.9	1.9	1.8	1.8	1.8	1.6	0.5	995.8

Photometric test report

Family DL 11 iQ	Order number: 5XA5565AF108P00022 EAN: 4058352955642	LP number 59375_86
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
115,0°	2.2	2.2	2.2	2.1	2.1	2.0	2.0	1.8	1.8	1.8	1.8	1.8	1.8
117,5°	2.1	2.2	2.1	2.0	2.0	1.9	1.8	1.8	1.8	1.6	1.6	1.6	1.6
120,0°	2.1	2.1	2.0	2.0	1.9	1.8	1.8	1.7	1.6	1.6	1.6	1.6	1.6
122,5°	2.0	2.0	1.9	1.9	1.8	1.7	1.6	1.6	1.6	1.6	1.6	1.6	1.6
125,0°	2.0	1.9	1.9	1.8	1.7	1.6	1.6	1.6	1.6	1.5	1.3	1.3	1.3
127,5°	1.8	1.8	1.7	1.6	1.6	1.5	1.5	1.3	1.3	1.3	1.3	1.3	1.3
130,0°	1.6	1.6	1.6	1.5	1.3	1.3	1.3	1.3	1.1	1.1	1.1	1.1	1.1
132,5°	1.5	1.3	1.3	1.3	1.2	1.1	1.1	1.1	1.1	1.0	0.9	0.9	0.9
135,0°	1.3	1.3	1.3	1.2	1.1	1.1	1.1	1.0	1.0	0.9	0.9	0.9	0.9
137,5°	1.3	1.2	1.1	1.1	1.1	1.1	1.0	0.9	0.9	0.9	0.9	0.9	0.9
140,0°	1.1	1.1	1.1	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8
142,5°	1.1	1.1	1.1	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.8	0.8
145,0°	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.7	0.7	0.7	0.7	0.7
147,5°	0.9	0.9	0.9	0.9	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.6
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565AF108P00022 EAN: 4058352955642	LP number 59375_86
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
115,0°	1.8	1.8	1.8	1.8	1.8	1.8	2.2	2.2	2.2	2.2	2.2	2.2	2.2
117,5°	1.6	1.6	1.6	1.7	1.6	1.6	2.2	2.2	2.2	2.2	2.2	2.2	2.2
120,0°	1.6	1.6	1.6	1.6	1.6	1.6	2.1	2.1	2.1	2.1	2.1	2.1	2.1
122,5°	1.5	1.6	1.5	1.6	1.6	1.6	2.0	2.0	2.0	2.0	2.0	2.0	2.0
125,0°	1.3	1.3	1.3	1.3	1.3	1.3	2.0	2.0	2.0	2.0	2.0	2.0	2.0
127,5°	1.3	1.3	1.3	1.3	1.3	1.3	1.8	1.8	1.8	1.8	1.9	1.9	2.0
130,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.7	1.7	1.8	1.8	1.8	1.8	1.8
132,5°	0.9	0.9	0.9	0.9	0.9	0.9	1.6	1.6	1.6	1.6	1.6	1.6	1.6
135,0°	0.9	0.9	0.9	0.9	0.9	0.9	1.5	1.6	1.6	1.6	1.6	1.6	1.6
137,5°	0.9	0.9	0.9	0.9	0.9	0.9	1.3	1.3	1.3	1.3	1.3	1.3	1.5
140,0°	0.8	0.9	0.9	0.8	0.9	0.7	1.1	1.1	1.1	1.1	1.3	1.3	1.3
142,5°	0.7	0.7	0.7	0.7	0.7	0.7	1.1	1.1	1.1	1.1	1.1	1.1	1.3
145,0°	0.7	0.7	0.7	0.7	0.7	0.7	1.0	1.0	1.0	1.1	1.1	1.1	1.1
147,5°	0.6	0.6	0.6	0.6	0.4	0.4	0.9	0.9	0.9	0.9	0.9	0.9	0.9
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565AF108P00022 EAN: 4058352955642	LP number 59375_86
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm											Luminous flux in lm/klm	
115,0°	2.2	2.2	2.2	2.1	2.0	1.9	1.9	1.8	1.8	1.8	1.8	0.5	996.3
117,5°	2.1	2.1	2.0	2.0	2.0	1.9	1.8	1.8	1.8	1.7	1.8	0.5	996.7
120,0°	2.1	2.1	2.0	2.0	2.0	1.9	1.8	1.7	1.6	1.6	1.6	0.4	997.2
122,5°	2.0	2.0	2.0	2.0	1.9	1.8	1.8	1.6	1.6	1.6	1.6	0.4	997.6
125,0°	2.0	2.0	2.0	1.8	1.8	1.8	1.7	1.6	1.6	1.6	1.6	0.4	998.0
127,5°	1.9	1.9	1.8	1.8	1.8	1.7	1.6	1.6	1.6	1.6	1.6	0.3	998.3
130,0°	1.8	1.8	1.8	1.8	1.7	1.6	1.6	1.6	1.5	1.6	1.6	0.3	998.6
132,5°	1.6	1.7	1.6	1.6	1.6	1.6	1.6	1.5	1.3	1.3	1.3	0.3	998.9
135,0°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.3	1.3	1.3	1.3	0.2	999.1
137,5°	1.6	1.5	1.6	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3	0.2	999.4
140,0°	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.1	1.1	1.1	0.2	999.6
142,5°	1.3	1.3	1.3	1.2	1.3	1.1	1.1	1.1	1.1	1.1	1.1	0.2	999.7
145,0°	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	0.1	999.9
147,5°	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.0	1.1	0.1	1000.0
150,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
152,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
157,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
162,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
167,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
172,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
177,5°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family DL 11 iQ	Order number: 5XA5565AF108P00022 EAN: 4058352955642	LP number 59375_86
--------------------	--	-----------------------

Dimming levels table	environmental temperature: 25°C	siteco
----------------------	---------------------------------	--------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	3810	33.6	35.9	34.8
95	241	252	3615	31.3	33.5	32.4
90	229	250	3435	29.4	31.4	30.4
85	216	248	3240	27.3	29.2	28.2
80	203	246	3045	25.4	27.1	26.2
75	190	243	2850	23.5	25.1	24.3
70	178	241	2670	21.9	23.3	22.6
65	165	238	2475	20.1	21.4	20.8
60	152	235	2280	18.4	19.5	19.0
55	140	232	2100	16.8	17.9	17.4
50	127	229	1905	15.2	16.2	15.7
45	114	225	1710	13.6	14.5	14.0
40	102	221	1530	12.2	13.0	12.6
35	89	216	1335	10.7	11.3	11.0
30	76	210	1140	9.2	9.7	9.4
25	63	203	945	7.8	8.2	8.0
20	51	195	765	6.6	6.9	6.8
15	38	184	570	5.2	5.4	5.3
11	28	173	420	4.1	4.3	4.2