
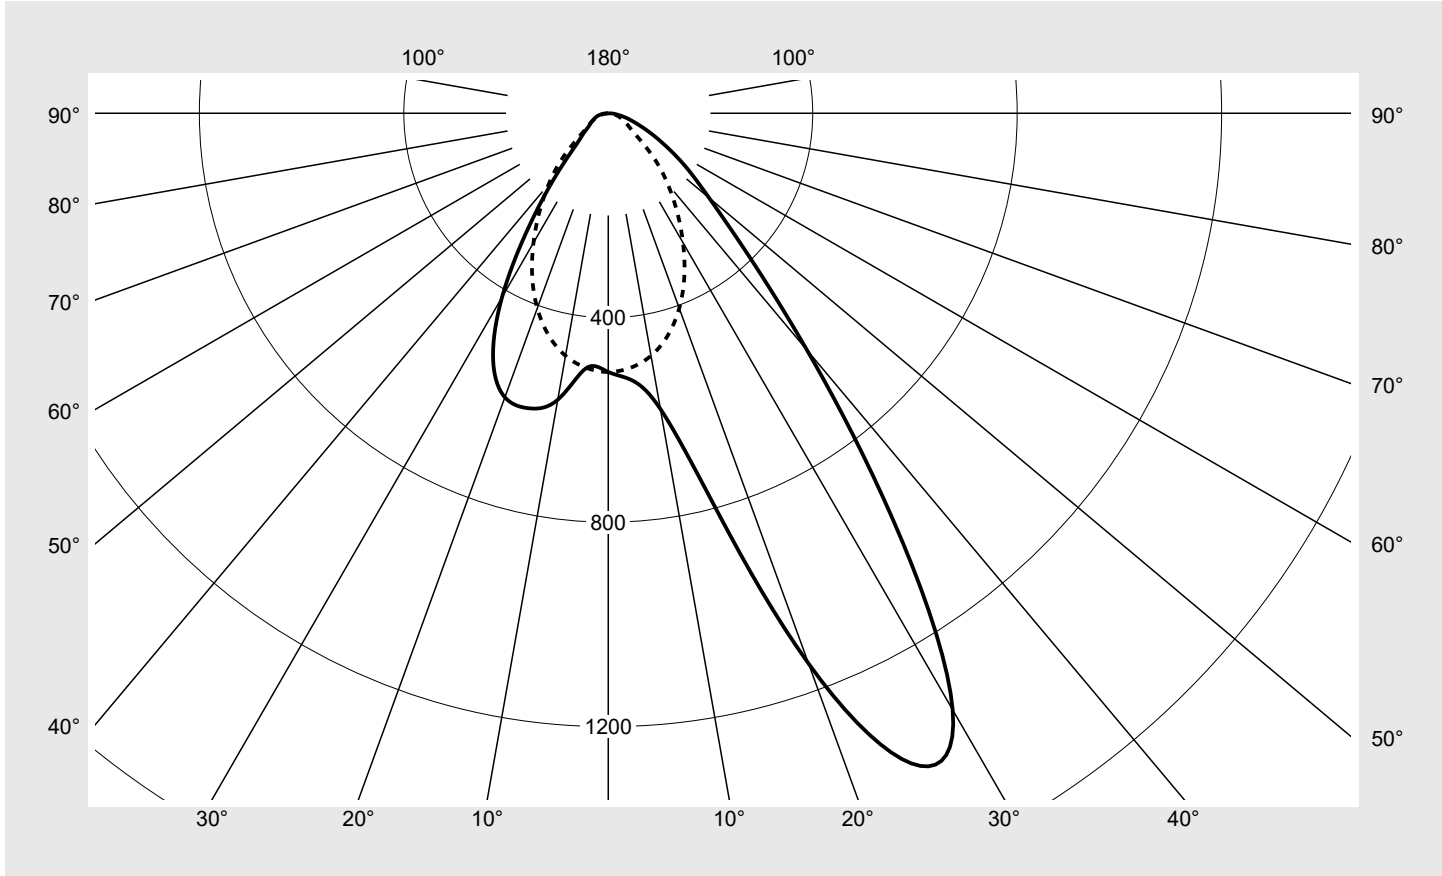


Photometric test report

Family Trunking Flex 31 	Order number: 51RE14MA66B EAN: 4058352581957	LP number 59300_4
	Version primary light control with lens, transparent, PMMA, asymmetric distribution Lamps LED 6500 K CRI ≥ 80 Controlgear ECG Multilumen Rated values Net luminous flux = 6400 lm Power consumption = 40.0 W Luminous efficacy = 160 lm/W	serial documentation 27.03.2024



Luminous intensity in cd/klm C180-0 C270-90 Imax: 1404 cd/klm



Classifications	
DIN 5040	A 5 1
CIE	N1=72 N2=92 N3=98 N4=99 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	99.1%
ϕ_o	0.9%

Measurement conditions
 DIN EN 13032 and DIN 5032

Photometric test report

Family Trunking Flex 31	Order number: 51RE14MA66B EAN: 4058352581957	LP number 59300_4
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
γ	Luminous intensity in cd/klm						
0°	506.1	506.1	506.1	506.1	506.1	506.1	506.1
5°	524.1	520.4	516.8	512.3	507.7	503.8	499.8
10°	587.5	565.6	543.8	525.4	507.1	494.4	481.7
15°	787.7	703.1	618.5	559.3	500.0	475.0	450.0
20°	1145.9	928.3	710.7	596.9	483.1	444.5	405.9
25°	1403.6	1077.6	751.7	602.0	452.3	402.2	352.1
30°	1347.7	1022.8	697.9	553.2	408.5	350.4	292.4
35°	972.0	779.1	586.1	471.8	357.5	296.0	234.4
40°	604.8	528.0	451.3	373.5	295.7	238.4	181.2
45°	377.5	347.5	317.5	268.4	219.4	175.3	131.2
50°	257.4	236.9	216.3	180.9	145.5	113.4	81.4
55°	188.6	169.5	150.4	123.0	95.6	75.2	54.7
60°	133.1	118.1	103.2	84.3	65.5	53.9	42.3
65°	90.7	82.0	73.2	60.3	47.4	40.2	33.0
70°	59.1	53.5	48.0	41.4	34.7	30.0	25.2
75°	38.4	34.3	30.1	26.9	23.6	20.8	18.0
80°	21.6	19.6	17.6	16.2	14.8	13.0	11.2
85°	10.8	9.6	8.4	8.0	7.6	6.5	5.3
90°	5.0	4.1	3.1	3.2	3.3	2.6	1.8
95°	3.7	3.0	2.2	2.4	2.5	1.9	1.3
100°	3.9	3.2	2.6	2.5	2.3	1.8	1.2
105°	3.6	3.2	2.7	2.5	2.4	1.8	1.3
110°	3.7	3.3	2.8	2.6	2.3	1.9	1.4
115°	3.7	3.2	2.7	2.5	2.4	2.0	1.6
120°	6.8	4.8	2.8	2.6	2.3	2.1	1.9
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Trunking Flex 31	Order number: 51RE14MA66B EAN: 4058352581957	LP number 59300_4
Table of values for luminous intensities		Maximum luminous intensity
		sITeco

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	506.1	506.1	506.1	506.1	506.1	506.1	3.0	3.0
5°	496.1	492.3	494.6	496.9	498.8	500.8	24.1	27.1
10°	476.5	471.3	496.4	521.6	545.4	569.1	49.2	76.4
15°	443.9	437.7	489.6	541.4	569.5	597.6	76.6	153.0
20°	397.3	388.6	443.6	498.7	545.0	591.4	104.8	257.8
25°	336.1	320.1	377.0	434.0	483.5	533.0	126.6	384.4
30°	272.9	253.4	308.4	363.4	389.6	415.7	132.3	516.7
35°	214.6	194.8	233.7	272.6	271.5	270.3	118.8	635.5
40°	164.3	147.4	165.9	184.5	172.1	159.6	96.4	731.9
45°	118.0	104.9	104.3	103.7	97.9	92.2	71.8	803.7
50°	71.5	61.5	63.5	65.6	65.6	65.7	51.2	855.0
55°	50.7	46.7	48.2	49.8	49.2	48.7	38.6	893.6
60°	40.0	37.7	40.0	42.4	41.3	40.2	29.9	923.4
65°	31.9	30.7	33.2	35.6	34.6	33.6	23.4	946.8
70°	25.0	24.8	27.0	29.2	28.6	27.9	17.6	964.4
75°	18.3	18.7	20.9	23.0	22.9	22.7	12.7	977.1
80°	11.7	12.2	14.2	16.3	16.1	15.9	8.2	985.3
85°	5.9	6.5	8.0	9.4	9.3	9.2	4.3	989.6
90°	2.2	2.6	3.7	4.8	4.7	4.5	1.9	991.5
95°	1.6	1.9	2.7	3.5	3.3	3.2	1.4	992.8
100°	1.5	1.8	2.6	3.4	3.3	3.3	1.3	994.2
105°	1.6	2.0	2.8	3.6	3.5	3.4	1.4	995.5
110°	1.7	2.1	3.0	4.0	4.0	4.0	1.4	997.0
115°	1.9	2.2	3.1	4.0	4.1	4.3	1.4	998.4
120°	2.2	2.4	3.3	4.2	5.8	7.4	1.6	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Trunking Flex 31	Order number: 51RE14MA66B EAN: 4058352581957	LP number 59300_4
-----------------------------------	---	-----------------------------

UGR-Table	Standard room	siteco
------------------	----------------------	---------------

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	24.8	26.3	25.2	26.6	26.9	19.1	20.5	19.5	20.8	21.2
	3H	25.3	26.6	25.7	26.9	27.3	19.7	21.0	20.0	21.3	21.6
	4H	25.5	26.7	25.9	27.0	27.4	19.9	21.1	20.3	21.5	21.9
	6H	25.6	26.7	26.0	27.0	27.4	20.1	21.3	20.5	21.6	22.0
	8H	25.7	26.6	26.1	27.0	27.4	20.2	21.3	20.6	21.7	22.1
	12H	25.7	26.6	26.2	27.0	27.4	20.3	21.3	20.7	21.7	22.1
4H	2H	24.8	26.1	25.2	26.4	26.8	19.6	20.8	20.0	21.2	21.5
	3H	25.4	26.4	25.9	26.8	27.2	20.4	21.4	20.8	21.7	22.2
	4H	25.7	26.5	26.1	27.0	27.4	20.7	21.6	21.2	22.0	22.5
	6H	25.8	26.6	26.3	27.0	27.5	21.0	21.8	21.5	22.2	22.7
	8H	25.9	26.6	26.4	27.0	27.5	21.1	21.9	21.6	22.3	22.8
	12H	26.0	26.5	26.4	27.0	27.5	21.2	21.9	21.7	22.3	22.8
8H	4H	25.6	26.3	26.1	26.8	27.3	21.0	21.7	21.5	22.1	22.6
	6H	25.8	26.4	26.3	26.9	27.4	21.4	22.0	21.9	22.4	22.9
	8H	25.9	26.4	26.4	26.9	27.4	21.6	22.1	22.1	22.5	23.1
	12H	26.0	26.4	26.5	26.9	27.5	21.7	22.1	22.2	22.6	23.2
12H	4H	25.6	26.3	26.1	26.7	27.2	21.0	21.6	21.5	22.1	22.6
	6H	25.8	26.3	26.3	26.8	27.4	21.5	21.9	22.0	22.4	22.9
	8H	25.9	26.4	26.4	26.9	27.4	21.7	22.1	22.2	22.6	23.1

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1146	H(C0) = 5	H(C180) = 5								
			B = 61	H(C90) = 5	H(C270) = 5								
C-planes	0°	15°	30°	45°	60°	75°	90°	105°	120°	135°	150°	165°	180°
	345°	330°	315°	300°	285°	270°	255°	240°	225°	210°	195°		
γ	Luminance in cd/m²												
45°	45176.1	41647.8	38303.0	32755.1	27186.9	22130.7	16909.1	14900.3	12993.7	12721.8	12506.3	11738.6	11036.4
50°	33404.1	30792.8	28340.8	24017.3	19667.7	15681.3	11536.3	9880.4	8319.6	8436.7	8588.6	8528.2	8518.9
55°	26950.3	24271.9	21734.8	18059.1	14343.7	11576.7	8679.3	7811.5	7008.8	7082.7	7191.8	7049.3	6957.4
60°	21335.9	18990.4	16772.8	13966.4	11125.0	9446.1	7678.6	7008.7	6401.5	6628.4	6887.6	6635.9	6442.4
65°	16716.2	15149.9	13711.7	11552.6	9367.5	8255.7	7078.6	6545.5	6076.7	6356.1	6669.6	6396.6	6191.7
70°	12905.7	11739.7	10697.3	9483.8	8282.0	7499.2	6665.6	6249.5	5900.7	6189.5	6518.2	6267.2	6098.1
75°	10399.2	9324.0	8370.4	7744.8	7165.5	6723.7	6258.8	5925.7	5668.2	6013.7	6403.7	6219.4	6137.1
80°	7762.6	7094.6	6558.7	6348.1	6229.4	5992.4	5759.2	5392.4	5135.3	5578.5	6063.8	5824.6	5716.9
85°	5840.4	5255.3	4817.7	4968.4	5307.7	5265.8	5303.9	4818.2	4544.0	4935.6	5385.7	5100.8	4996.0


Photometric test report

Family Trunking Flex 31	Order number: 51RE14MA66B EAN: 4058352581957	LP number 59300_4
-----------------------------------	---	-----------------------------

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

siteco

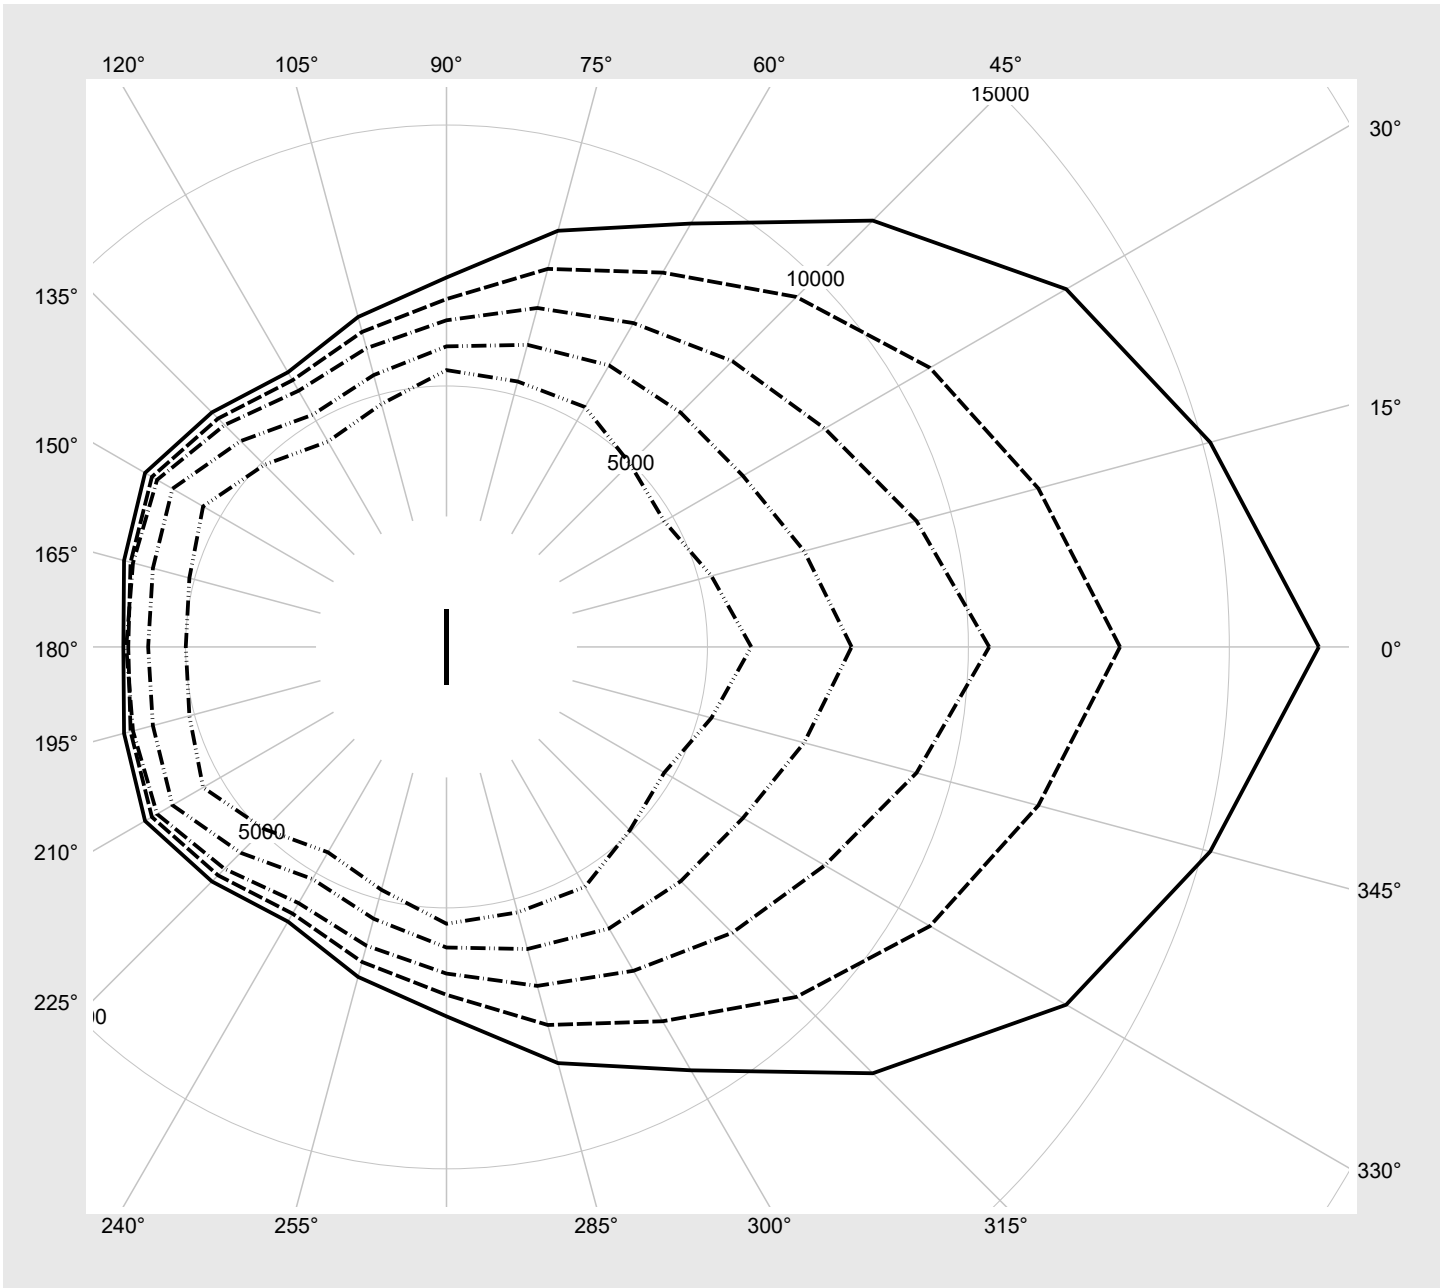

Photometric test report

Family Trunking Flex 31	Order number: 51RE14MA66B EAN: 4058352581957	LP number 59300_4
-----------------------------------	---	------------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting		Luminous flux [lm]	Power consumption [W]
	1	2		
3	ON	ON	6400	40.0
2	ON	OFF	5610	34.0
1	OFF	ON	4450	27.0
0	OFF	OFF	3300	20.0