

Photometric test report

Family
Streetlight 11 mini LED

Order number: 5XC2HC1F08GE
EAN: 4069025225412

LP number
59339_265

serial
documentation
25.04.2024



Version post-top or side-entry mounting
Optic asymmetric, extremely wide distribution with an additional rear light component (ST0.5ST0.5)
Cover transparent, PMMA
Lamps LED 3000 K | CRI ≥ 70
Controlgear ECG SITECO iQ
Setting factory setting
Rated values Net luminous flux = 3550 lm
 Power consumption = 24.9 W
 Luminous efficacy = 142.6 lm/W

siteco

Luminous intensity in cd/klm


C180-0

C192.5-12.5

C195-15

C270-90

Imax: 485 cd/klm

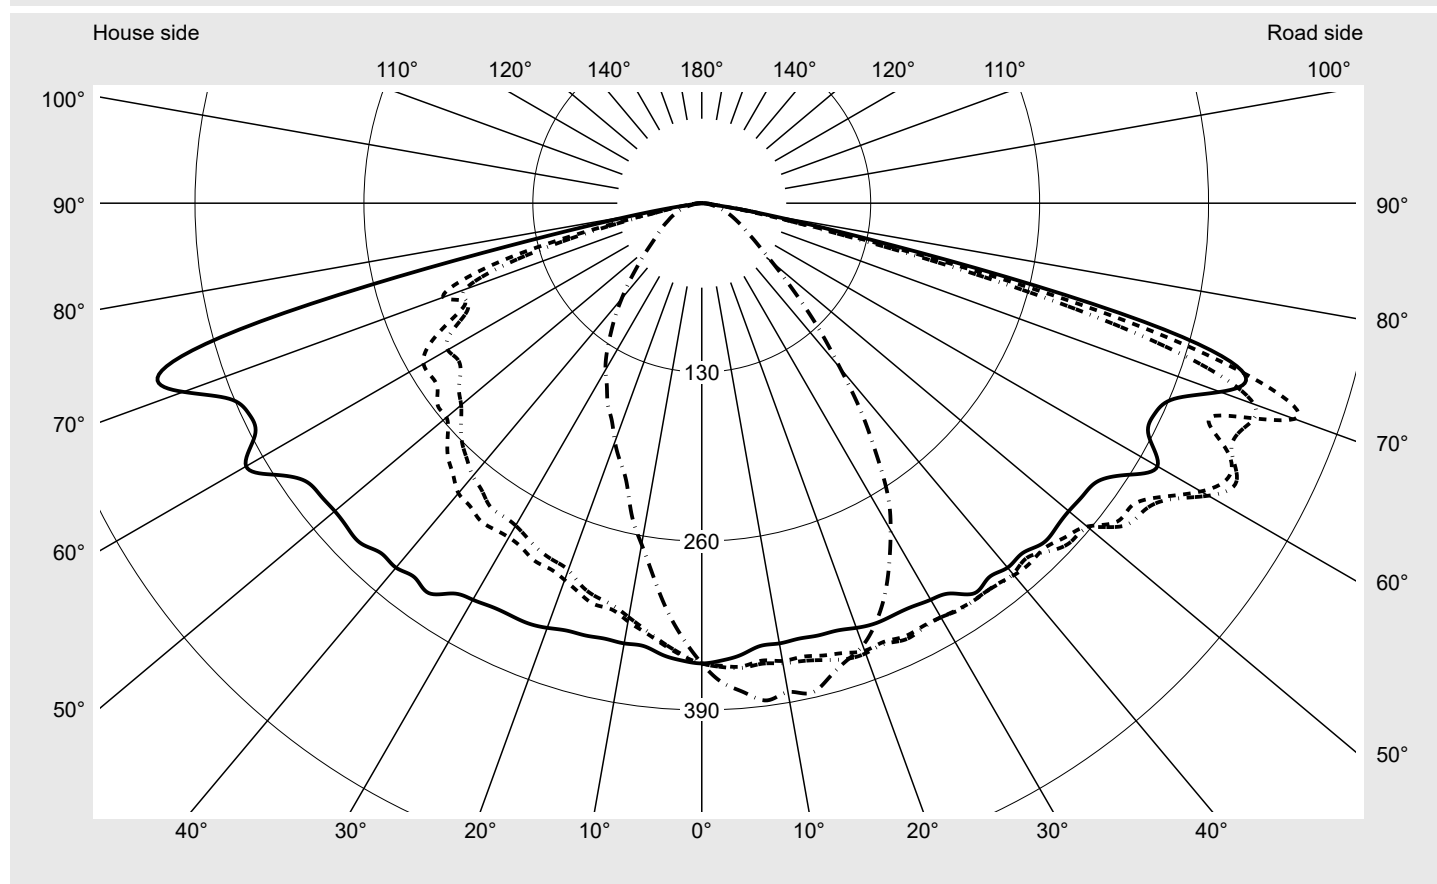

Luminaire output ratios

Eta	100.0%
Eta 0° - 90°	100.0%
Eta 90° - 180°	0.0%

Luminous intensity class acc. to EN13201-2

Class:	G4
Imax 70°	485.5
Imax 80°	67.9
Imax 90°	0.0
Imax >90°	0.0
Imax >95°	0.0

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family
Streetlight 11 mini LED

Order number: **5XC2HC1F08GE**
EAN: **4069025225412**

LP number
59339_265

Envelope curve in cd/klm


KMK 70°

KMK 67.5°

KMK 65°

KMK 62.5°

siteco

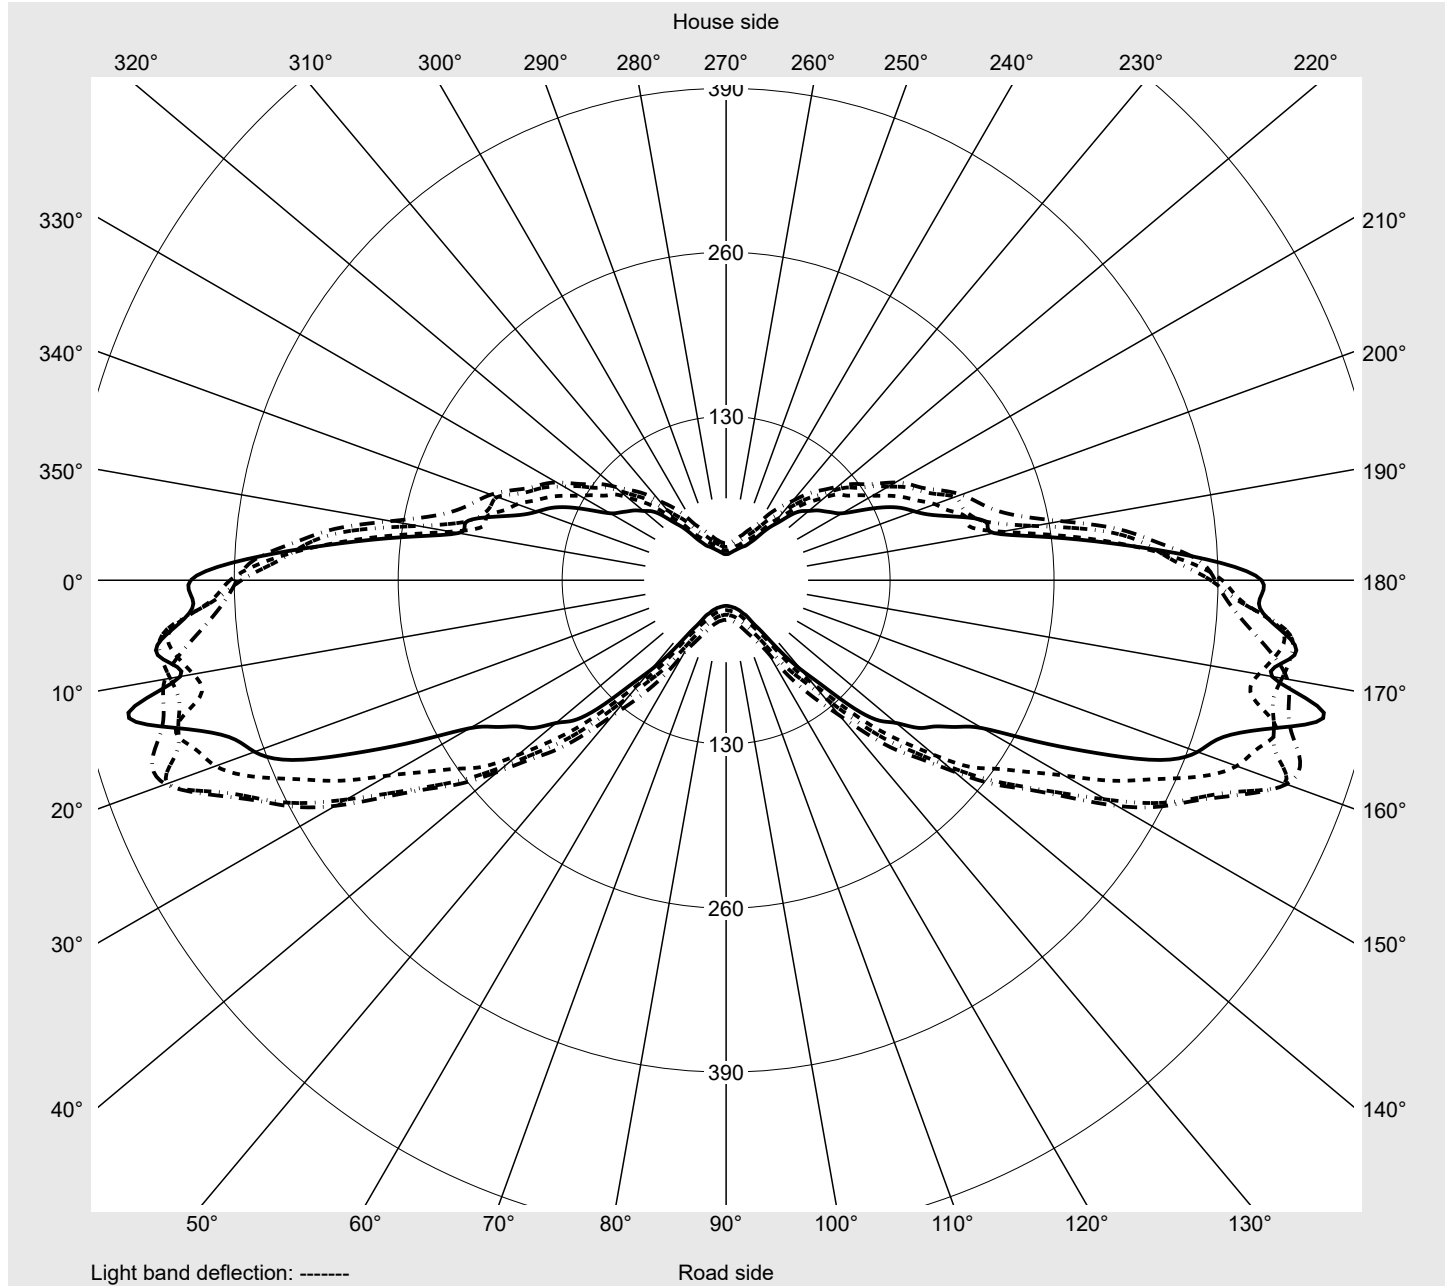

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08GE EAN: 4069025225412	LP number 59339_265
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0,0° 180,0°	2,5° 177,5°	5,0° 175,0°	7,5° 172,5°	10,0° 170,0°	12,5° 167,5°	15,0° 165,0°	17,5° 162,5°	20,0° 160,0°	22,5° 157,5°	25,0° 155,0°	27,5° 152,5°	30,0° 150,0°	32,5° 147,5°	35,0° 145,0°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	352.2	353.7	353.6	354.5	355.2	356.3	357.3	358.1	359.3	360.3	361.4	361.6	362.5	363.1	364.4
5,0°	348.9	350.4	352.9	355.0	355.9	357.8	358.9	360.2	361.9	363.3	364.6	366.3	367.5	369.4	370.9
7,5°	343.7	345.7	348.5	350.3	352.6	355.0	357.4	360.2	362.6	363.9	366.3	368.4	369.8	370.1	371.3
10,0°	344.0	346.0	348.4	351.2	353.8	357.7	359.5	362.4	366.1	368.0	369.9	370.9	372.9	372.9	374.6
12,5°	343.3	346.8	349.2	351.8	354.6	357.5	360.8	363.4	366.6	369.3	370.9	372.6	373.6	374.9	375.5
15,0°	344.5	349.3	352.8	355.6	357.2	360.4	364.0	366.7	369.8	371.0	372.8	374.2	375.1	377.1	377.5
17,5°	344.9	349.8	353.7	357.2	360.0	363.0	367.8	372.1	372.9	373.1	373.7	374.7	374.8	374.6	375.4
20,0°	347.8	353.8	356.7	361.3	364.1	366.6	368.6	370.3	372.5	374.8	376.2	377.0	377.2	375.3	374.4
22,5°	349.9	355.1	357.8	360.3	363.5	365.5	367.2	368.9	370.7	372.3	372.7	374.2	374.0	373.2	372.8
25,0°	349.7	354.9	358.2	361.9	364.4	368.1	370.5	372.3	371.0	369.6	371.2	369.1	369.0	368.2	364.2
27,5°	350.1	356.6	359.2	364.0	366.5	367.4	368.7	367.1	369.5	369.0	367.9	365.9	364.3	364.7	362.3
30,0°	352.4	358.7	362.9	368.0	369.2	368.0	368.0	367.1	366.8	366.9	366.5	364.0	360.0	358.1	354.2
32,5°	356.1	363.9	366.7	365.9	366.6	369.7	370.6	370.3	368.4	365.5	363.8	361.5	356.7	351.8	347.3
35,0°	366.3	369.7	370.2	371.2	370.3	370.6	370.4	369.0	367.4	364.5	361.6	356.9	351.8	346.3	339.8
37,5°	363.0	370.4	372.4	372.1	372.2	370.7	371.2	370.3	369.3	367.2	359.3	352.7	346.2	341.9	334.5
40,0°	366.1	370.8	371.4	372.0	373.5	373.7	372.7	372.2	366.9	358.9	355.6	352.2	345.4	337.8	323.0
42,5°	365.3	370.9	371.2	371.4	374.9	374.8	370.2	369.5	365.0	357.0	352.6	345.3	335.1	325.5	320.0
45,0°	370.5	375.7	377.4	376.4	376.0	374.4	378.5	375.5	369.3	361.5	353.6	346.2	334.0	323.8	308.8
47,5°	369.8	376.4	376.9	377.8	379.8	380.1	385.5	382.1	375.5	365.9	357.9	346.3	335.0	323.9	310.9
50,0°	368.7	377.2	379.8	381.5	384.6	387.1	388.7	385.1	380.7	376.6	365.6	350.8	335.7	320.6	305.8
52,5°	369.7	379.2	380.8	383.8	396.2	402.7	408.2	401.0	390.7	381.3	371.0	358.2	342.2	325.4	303.1
55,0°	372.7	379.3	379.9	383.0	391.9	404.8	414.1	410.6	401.4	391.3	378.4	363.2	342.3	324.3	307.1
57,5°	389.0	394.5	400.4	405.9	413.2	420.5	424.9	420.7	412.3	397.1	380.9	362.5	342.8	318.0	297.5
60,0°	404.9	409.9	418.7	427.9	442.5	443.6	450.2	449.1	442.2	417.0	389.7	369.9	351.1	320.8	295.0
62,5°	387.8	398.6	415.0	435.3	451.8	456.9	463.9	477.2	472.8	443.8	412.7	388.5	357.7	319.5	288.5
65,0°	384.3	409.1	445.0	452.4	447.6	444.2	449.7	457.3	471.2	438.3	409.5	382.6	347.6	313.6	284.5
67,5°	393.4	410.9	441.4	441.4	428.9	427.4	451.8	442.5	430.7	406.6	373.4	344.2	309.7	282.7	260.5
70,0°	424.6	422.8	440.1	454.6	439.5	485.5	452.2	413.3	397.8	372.4	324.4	276.3	234.6	216.5	202.1
72,5°	438.0	416.1	439.2	466.1	444.6	440.9	388.1	346.1	334.3	303.8	246.4	195.7	160.9	145.0	131.4
75,0°	351.5	331.1	329.2	378.1	328.1	302.9	247.8	217.5	209.5	200.0	168.0	137.7	121.1	112.0	99.9
77,5°	153.4	188.1	189.7	181.6	140.2	118.0	101.0	95.5	96.2	100.9	98.8	90.3	82.9	75.7	63.8
80,0°	50.5	67.9	57.9	44.5	39.4	39.1	46.9	49.3	47.0	42.7	45.1	43.7	39.7	35.6	30.4
82,5°	10.3	10.3	10.1	10.2	10.7	12.0	13.9	12.3	12.7	11.7	12.6	11.6	11.2	11.0	10.8
85,0°	6.2	6.2	6.2	6.1	6.1	6.1	6.0	5.9	5.8	5.6	5.5	5.3	5.1	5.0	4.9
87,5°	3.2	3.2	3.2	3.2	3.2	3.1	3.0	3.0	3.0	2.9	2.8	2.8	2.7	2.7	2.6
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08GE EAN: 4069025225412	LP number 59339_265
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	37,5° 142,5°	40,0° 140,0°	42,5° 137,5°	45,0° 135,0°	47,5° 132,5°	50,0° 130,0°	52,5° 127,5°	55,0° 125,0°	57,5° 122,5°	60,0° 120,0°	62,5° 117,5°	65,0° 115,0°	67,5° 112,5°	70,0° 110,0°	72,5° 107,5°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	364.3	365.1	365.8	365.8	365.5	365.4	366.1	366.1	366.9	368.0	368.3	368.8	369.0	369.2	369.1
5,0°	372.6	372.7	374.4	374.5	376.2	377.2	378.2	378.1	378.2	377.9	379.2	379.2	379.0	378.7	378.3
7,5°	372.2	373.0	375.2	377.0	379.0	380.7	382.6	383.5	384.6	384.6	384.8	384.6	385.8	386.3	387.3
10,0°	375.5	375.9	375.9	377.8	378.9	380.5	381.6	383.0	382.4	383.8	384.3	384.5	384.9	385.6	386.2
12,5°	376.3	377.0	377.5	378.9	380.2	383.0	383.5	384.6	383.7	383.7	382.4	382.0	382.8	382.0	381.6
15,0°	377.8	377.5	376.8	376.1	375.8	377.1	377.5	378.5	378.1	377.5	377.4	378.2	377.5	378.9	379.9
17,5°	376.5	376.2	375.8	373.6	371.2	371.4	369.7	369.9	370.4	372.0	370.3	371.5	370.6	371.4	370.4
20,0°	372.8	373.3	373.2	375.5	372.9	370.5	366.2	364.2	361.9	362.7	362.3	362.4	361.6	361.9	360.7
22,5°	372.3	370.2	369.6	367.3	364.1	363.0	360.6	357.1	354.0	352.5	351.2	349.9	350.1	348.1	348.8
25,0°	363.0	361.2	360.4	357.9	354.5	352.2	350.1	348.9	347.5	343.9	341.3	338.8	335.5	333.8	333.2
27,5°	357.7	355.3	351.5	348.4	345.9	342.4	336.3	333.8	332.0	326.7	321.9	318.9	316.8	315.0	313.2
30,0°	350.3	348.1	344.4	337.4	330.6	325.4	322.2	317.4	312.2	307.9	304.0	298.6	295.7	295.2	293.9
32,5°	340.8	333.6	328.9	324.2	318.9	313.0	306.2	299.8	293.8	288.9	283.5	278.1	274.6	271.9	269.4
35,0°	332.1	324.0	315.4	309.9	303.3	295.1	286.0	277.2	269.4	264.4	257.7	252.1	247.9	244.9	242.0
37,5°	324.2	315.3	305.4	297.9	291.8	281.4	271.5	261.3	251.3	242.2	233.2	226.3	222.7	218.0	213.1
40,0°	316.6	306.5	294.1	284.1	274.2	262.4	252.0	239.8	228.9	221.6	213.1	204.3	196.7	189.8	184.7
42,5°	306.4	294.5	283.0	272.1	257.6	243.2	234.5	224.1	212.6	201.6	190.8	181.0	173.2	165.3	159.1
45,0°	295.9	284.8	269.4	256.0	243.0	231.9	219.1	206.3	193.7	181.5	170.7	159.0	151.5	143.1	136.0
47,5°	292.7	276.4	257.1	243.5	228.8	215.6	201.4	188.6	175.0	162.8	151.2	140.4	132.1	124.7	116.8
50,0°	290.2	270.1	249.2	231.2	214.9	197.9	184.8	169.6	156.5	144.6	132.8	122.8	112.7	104.7	97.9
52,5°	282.5	259.8	242.3	217.1	198.4	181.2	166.2	150.7	136.9	126.8	117.7	107.1	98.5	90.0	82.4
55,0°	284.1	257.7	230.1	204.4	183.1	165.1	148.2	131.4	120.2	110.1	101.5	92.5	83.4	75.2	68.4
57,5°	277.1	250.3	225.4	199.2	177.5	160.1	137.7	120.6	107.5	97.0	86.4	77.2	68.9	61.8	56.1
60,0°	271.7	246.7	221.1	197.6	176.9	154.8	129.8	111.7	98.2	86.1	73.0	63.5	56.4	50.5	45.9
62,5°	264.8	236.3	210.0	189.8	165.1	140.0	121.2	103.6	85.7	66.5	57.0	50.5	45.7	41.8	38.5
65,0°	258.3	229.0	201.3	177.5	148.6	121.2	100.8	85.9	67.9	54.3	46.6	41.2	37.5	34.7	32.5
67,5°	242.8	215.7	189.1	163.0	132.3	107.0	87.8	61.6	49.0	42.0	37.3	33.9	30.8	28.8	27.2
70,0°	192.3	176.1	164.8	143.8	113.6	92.8	72.3	51.5	41.4	33.1	29.9	27.2	25.3	24.1	22.9
72,5°	127.9	125.3	123.6	114.2	91.3	79.6	52.4	40.4	31.9	26.1	22.7	21.1	20.2	19.7	19.1
75,0°	87.2	80.4	76.9	69.8	57.4	47.0	31.0	30.1	23.1	19.3	17.9	16.9	16.3	15.8	15.4
77,5°	54.1	49.4	43.0	40.4	36.5	27.1	21.8	20.2	15.8	14.9	14.1	13.5	12.9	12.5	12.1
80,0°	24.5	23.0	21.7	18.0	15.5	14.7	15.1	13.9	11.9	11.2	10.8	10.3	9.8	9.5	9.1
82,5°	9.8	9.6	9.4	8.9	8.8	8.7	8.5	8.3	8.1	7.9	7.6	7.3	7.0	6.7	6.3
85,0°	4.8	4.7	4.7	4.7	4.6	4.6	4.6	4.5	4.4	4.3	4.1	4.0	3.9	3.8	3.7
87,5°	2.5	2.4	2.5	2.3	2.3	2.2	2.1	2.0	1.8	1.7	1.6	1.5	1.4	1.4	1.3
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08GE EAN: 4069025225412	LP number 59339_265
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	75,0° 105,0°	77,5° 102,5°	80,0° 100,0°	82,5° 97,5°	85,0° 95,0°	87,5° 92,5°	90,0°	182,5° 357,5°	185,0° 355,0°	187,5° 352,5°	190,0° 350,0°	192,5° 347,5°	195,0° 345,0°	197,5° 342,5°	200,0° 340,0°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	368.8	368.7	369.1	369.4	369.9	370.0	369.5	351.3	350.3	350.3	349.4	348.5	347.5	346.6	346.0
5,0°	378.8	379.3	379.3	379.3	378.4	378.0	378.1	347.8	346.4	344.3	342.5	340.9	339.7	338.0	337.1
7,5°	387.1	386.5	387.3	388.3	387.3	386.1	385.9	341.0	337.9	336.2	335.0	333.2	331.2	329.2	327.2
10,0°	387.1	386.1	385.0	384.4	384.3	383.4	382.0	340.4	336.6	333.8	330.4	326.8	323.5	320.9	317.2
12,5°	382.3	383.3	385.7	385.9	386.0	385.9	386.2	338.4	334.9	330.1	323.8	320.3	316.9	311.9	307.5
15,0°	379.6	381.1	382.3	380.7	381.0	379.0	378.1	339.0	334.9	330.7	325.8	319.6	313.6	306.7	299.9
17,5°	370.8	371.7	371.6	372.2	371.2	371.0	369.4	339.2	334.1	326.5	320.3	314.2	308.5	301.1	293.7
20,0°	362.1	361.2	362.0	362.1	361.6	363.0	362.2	342.6	333.4	325.7	317.0	308.6	300.4	293.7	287.0
22,5°	348.3	346.7	346.6	348.8	350.0	349.8	349.7	341.9	332.8	324.4	315.2	304.7	297.7	289.0	281.5
25,0°	332.5	332.7	331.7	332.2	332.5	332.5	333.0	340.7	330.3	320.9	312.0	303.8	295.0	286.4	277.2
27,5°	313.4	313.7	313.3	311.0	311.4	311.8	312.4	343.0	332.1	320.5	310.1	299.3	290.6	281.4	270.5
30,0°	292.3	290.8	288.8	289.1	290.7	290.7	290.7	345.1	332.4	320.1	308.0	297.0	286.5	275.6	264.2
32,5°	266.0	263.9	263.7	262.4	261.8	263.5	266.5	346.7	335.8	321.5	307.7	297.5	285.3	271.5	260.2
35,0°	236.8	234.5	232.7	231.8	232.9	233.9	232.9	352.6	337.5	322.6	310.4	297.7	284.4	269.6	255.5
37,5°	210.5	206.6	204.1	201.1	199.8	200.2	200.5	353.4	339.3	321.8	307.8	293.5	278.3	264.9	252.9
40,0°	180.8	176.8	173.0	170.0	167.6	167.6	165.7	353.9	336.6	318.3	304.3	291.3	274.1	261.5	248.9
42,5°	154.3	149.4	145.4	142.2	138.7	138.0	137.4	351.4	332.1	314.3	298.0	283.3	267.4	253.6	239.0
45,0°	130.4	124.4	119.4	114.8	112.8	111.2	110.9	358.8	333.8	314.6	297.7	276.2	260.8	245.8	226.6
47,5°	108.9	103.2	98.0	93.3	90.5	89.0	88.2	354.8	328.1	304.8	286.0	265.2	251.3	232.6	213.6
50,0°	91.3	85.4	79.8	75.5	72.5	71.3	71.0	355.3	327.6	301.5	277.4	256.4	241.7	220.0	206.9
52,5°	76.0	69.9	65.1	61.4	59.6	58.3	57.8	352.2	319.8	294.3	273.3	256.0	235.6	215.5	199.2
55,0°	62.3	57.1	53.6	51.0	49.8	49.1	48.8	350.0	316.1	287.7	264.0	248.3	226.6	210.6	195.0
57,5°	51.0	47.5	44.7	43.3	42.5	41.9	41.4	370.5	329.9	295.5	264.5	247.3	223.1	206.7	190.1
60,0°	42.7	40.4	38.7	37.6	36.9	36.4	36.5	381.4	344.4	311.0	276.6	247.2	225.8	205.8	195.6
62,5°	36.1	34.6	33.2	32.5	31.9	31.4	31.6	374.3	343.4	312.7	269.9	236.7	218.5	207.9	198.4
65,0°	30.9	29.6	28.8	28.2	27.9	27.4	27.5	355.3	333.3	300.3	248.0	213.1	200.3	195.7	192.9
67,5°	26.2	25.4	25.0	24.4	24.2	23.9	23.8	363.0	319.9	269.7	221.7	197.5	196.1	184.5	176.2
70,0°	22.4	21.7	21.3	20.9	20.5	20.4	20.3	380.9	318.5	260.7	215.5	211.5	193.7	171.9	159.3
72,5°	18.6	18.0	17.7	17.5	17.2	17.0	16.9	359.8	306.3	278.3	225.9	188.4	160.9	138.0	134.1
75,0°	15.1	14.8	14.5	14.1	13.8	13.7	13.7	291.4	253.8	231.4	177.1	131.4	102.2	90.4	87.8
77,5°	11.8	11.5	11.1	10.8	10.4	10.3	10.1	154.9	151.7	125.3	80.6	54.6	46.7	44.8	46.0
80,0°	8.6	8.2	7.9	7.6	7.4	7.2	7.1	63.3	48.9	34.1	30.1	25.4	24.1	25.7	25.4
82,5°	5.9	5.5	5.3	5.0	4.9	4.6	4.6	10.2	9.5	9.1	9.0	9.1	9.9	9.4	9.9
85,0°	3.4	3.1	3.0	2.7	2.6	2.3	2.4	5.9	5.9	5.7	5.6	5.4	5.2	5.1	4.9
87,5°	1.2	1.2	1.1	1.0	0.9	0.8	0.8	3.2	3.2	3.1	3.0	2.9	2.8	2.8	2.7
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08GE EAN: 4069025225412	LP number 59339_265
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	202,5° 337,5°	205,0° 335,0°	207,5° 332,5°	210,0° 330,0°	212,5° 327,5°	215,0° 325,0°	217,5° 322,5°	220,0° 320,0°	222,5° 317,5°	225,0° 315,0°	227,5° 312,5°	230,0° 310,0°	232,5° 307,5°	235,0° 305,0°	237,5° 302,5°
γ	Luminous intensity in cd/klm														
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2
2,5°	346.1	345.7	345.4	345.2	344.6	343.7	343.2	342.5	342.0	341.0	340.2	340.0	339.5	340.1	339.5
5,0°	335.1	333.9	333.3	332.1	330.7	329.5	328.7	327.5	327.4	326.1	324.3	322.8	321.4	320.6	319.9
7,5°	325.3	323.6	322.3	320.1	318.0	316.5	313.7	312.2	310.0	308.4	305.8	304.2	301.9	300.4	298.8
10,0°	313.9	310.8	307.2	303.7	300.9	298.3	295.6	292.7	290.5	288.2	286.1	284.0	281.6	279.4	278.2
12,5°	303.3	298.4	294.7	290.5	286.5	282.3	279.4	275.5	271.6	269.4	267.6	264.3	262.7	260.4	258.3
15,0°	295.6	289.6	283.6	278.6	272.0	266.5	262.1	258.0	255.1	251.3	247.9	245.2	242.6	240.9	238.5
17,5°	286.3	279.3	272.1	265.8	260.0	255.0	249.7	245.4	241.2	236.3	232.2	228.4	225.7	223.6	221.9
20,0°	278.8	270.4	263.1	257.0	252.2	246.7	239.7	233.7	228.3	224.2	219.5	215.1	210.8	207.7	206.0
22,5°	273.0	264.8	257.0	248.2	241.6	235.3	229.8	223.5	217.2	211.7	206.3	202.3	199.6	197.1	194.6
25,0°	267.2	257.4	249.4	241.3	234.0	226.8	219.9	212.9	206.3	200.8	197.0	192.7	189.0	186.1	183.1
27,5°	260.3	250.8	242.0	234.0	225.3	217.4	209.9	202.6	195.8	189.9	186.3	182.6	178.8	175.1	172.0
30,0°	253.7	244.5	234.6	226.2	217.8	207.6	199.7	193.5	187.6	181.6	177.4	173.7	169.5	165.9	162.9
32,5°	249.7	238.2	227.6	216.7	207.5	198.6	191.3	185.5	178.3	171.9	167.9	163.8	160.1	157.1	153.6
35,0°	243.9	232.0	220.1	209.0	199.1	191.5	184.0	176.8	171.0	164.9	159.9	156.0	152.3	148.0	144.2
37,5°	240.2	226.7	212.8	202.0	192.8	184.3	176.3	169.2	163.1	158.4	153.7	149.6	144.2	139.8	136.0
40,0°	232.1	217.0	206.7	196.6	185.6	176.3	168.9	163.4	157.6	151.8	147.4	142.2	136.4	132.0	127.8
42,5°	222.2	209.0	198.8	185.9	176.3	169.4	162.5	156.5	151.0	146.0	140.7	136.2	130.3	125.6	119.9
45,0°	213.6	201.7	187.6	176.7	169.9	163.2	157.5	151.8	146.1	140.4	135.4	129.4	124.3	118.0	112.2
47,5°	201.6	190.4	178.7	172.2	167.0	160.3	153.4	147.2	141.4	135.2	128.5	123.1	118.1	110.7	105.1
50,0°	193.9	181.1	174.1	167.2	161.5	155.9	149.4	143.4	136.3	129.1	121.9	115.9	108.8	102.6	96.3
52,5°	184.7	177.4	172.1	166.1	159.0	152.1	144.9	137.7	130.8	123.2	115.1	108.6	102.0	94.8	88.1
55,0°	184.9	176.0	169.0	162.2	154.2	148.9	141.4	133.0	124.4	115.2	107.4	99.9	92.7	85.9	80.7
57,5°	179.5	171.9	163.4	155.2	148.9	142.6	135.7	127.1	118.9	110.0	102.6	96.0	87.7	79.7	73.6
60,0°	183.1	170.1	162.7	155.5	145.7	138.2	131.4	121.8	114.0	106.1	99.0	91.1	81.9	74.2	67.6
62,5°	185.8	172.9	164.5	155.1	142.7	132.8	125.2	115.5	106.6	99.3	91.2	82.1	75.1	68.3	60.9
65,0°	179.0	168.8	160.0	148.5	138.8	127.8	120.8	110.3	100.1	91.9	81.9	72.3	64.5	58.6	51.3
67,5°	165.0	155.7	145.1	134.0	125.5	117.0	111.8	102.3	93.0	84.1	72.6	63.4	56.0	46.4	41.4
70,0°	149.9	136.6	120.0	106.2	100.0	95.3	91.0	85.5	81.1	74.0	63.3	56.0	47.9	39.9	35.4
72,5°	123.9	106.0	89.8	78.8	72.2	68.3	66.8	65.5	64.5	61.1	53.0	48.1	38.0	33.0	29.5
75,0°	85.5	76.0	66.6	60.9	58.4	54.4	49.8	47.5	45.7	43.6	38.5	34.2	28.2	27.0	24.0
77,5°	48.5	48.7	46.5	44.6	42.3	38.5	35.1	33.6	31.5	30.7	28.8	25.0	22.5	21.2	19.0
80,0°	24.7	26.2	26.3	25.4	24.5	23.0	21.0	20.5	20.3	19.4	18.3	17.7	17.3	16.3	15.2
82,5°	9.8	10.4	10.4	10.8	11.2	11.4	11.3	11.2	11.2	11.3	11.6	11.6	11.4	11.2	11.0
85,0°	4.8	4.7	4.6	4.4	4.3	4.2	4.2	4.2	4.3	4.3	4.6	4.9	5.2	5.5	5.6
87,5°	2.7	2.5	2.5	2.4	2.4	2.3	2.2	2.1	2.1	2.0	1.9	1.8	1.7	1.6	1.5
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08GE EAN: 4069025225412	LP number 59339_265
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	240,0° 300,0°	242,5° 297,5°	245,0° 295,0°	247,5° 292,5°	250,0° 290,0°	252,5° 287,5°	255,0° 285,0°	257,5° 282,5°	260,0° 280,0°	262,5° 277,5°	265,0° 275,0°	267,5° 272,5°	270,0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm													Luminous flux in lm/klm	
0,0°	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	354.2	0.5	0.5
2,5°	339.0	338.7	337.7	336.6	335.7	335.7	335.5	335.9	335.5	335.7	335.2	334.7	334.9	4.2	4.7
5,0°	319.4	318.2	317.0	316.1	315.5	314.7	314.4	314.2	314.0	314.1	314.4	313.3	313.3	8.3	13.1
7,5°	297.5	295.2	294.7	292.5	291.5	290.7	290.0	289.3	288.6	288.9	288.4	288.1	288.6	12.2	25.3
10,0°	276.3	274.4	273.1	271.4	270.5	270.1	269.7	268.8	267.8	268.3	267.4	267.0	266.6	15.9	41.2
12,5°	255.4	253.4	252.0	251.1	249.7	248.5	247.3	246.8	246.3	246.3	246.7	246.8	247.4	19.4	60.6
15,0°	237.2	235.8	233.2	231.1	229.6	228.1	228.3	228.1	226.4	225.6	223.7	222.7	223.2	22.6	83.2
17,5°	219.4	217.0	215.1	213.2	211.5	211.6	211.1	211.3	210.6	210.2	209.3	208.7	208.6	25.6	108.9
20,0°	204.5	202.3	200.4	199.1	198.1	197.5	196.9	196.7	195.9	195.2	194.9	194.9	195.4	28.5	137.4
22,5°	191.9	189.4	186.8	185.5	185.2	184.8	183.7	182.5	182.5	182.6	181.7	180.8	180.9	31.1	168.5
25,0°	179.8	178.0	177.1	175.9	173.6	172.3	171.8	172.0	171.4	170.6	170.5	170.8	171.0	33.4	201.9
27,5°	170.3	168.3	165.8	163.0	161.9	160.9	160.5	160.0	159.4	158.8	159.2	159.0	158.2	35.3	237.3
30,0°	160.1	157.8	155.3	153.8	152.1	150.9	150.3	149.6	148.8	148.2	147.9	148.0	148.2	37.0	274.3
32,5°	150.3	147.9	145.7	143.7	141.6	139.8	138.9	138.3	137.0	136.7	136.2	135.8	135.9	38.3	312.6
35,0°	140.5	137.3	134.8	133.0	130.4	127.8	126.4	125.5	124.6	123.3	122.9	122.3	122.1	39.3	351.9
37,5°	131.2	127.4	124.3	121.1	118.7	116.0	114.7	112.7	111.4	110.7	110.3	109.6	109.2	39.9	391.8
40,0°	122.0	118.4	114.9	110.6	107.7	104.9	102.0	100.4	99.0	98.1	96.6	96.0	95.9	40.3	432.1
42,5°	113.8	109.5	105.1	101.1	98.0	93.9	91.7	89.0	87.4	86.0	84.1	83.6	83.5	40.3	472.3
45,0°	106.5	101.6	96.4	92.1	87.8	84.4	81.2	78.1	75.8	74.0	72.9	72.1	71.6	40.4	512.8
47,5°	98.9	93.4	87.9	83.7	79.1	75.1	71.8	68.9	66.1	64.3	63.0	62.4	62.1	40.4	553.2
50,0°	90.5	84.8	79.7	75.5	70.9	67.0	63.7	59.8	57.4	55.9	54.3	53.6	53.3	40.4	593.5
52,5°	82.4	77.7	72.5	68.1	63.7	59.6	56.0	52.4	50.6	48.7	47.3	47.1	46.4	40.5	634.1
55,0°	75.2	71.1	66.0	60.6	56.2	52.7	49.5	46.4	44.4	43.0	42.0	41.5	41.3	40.5	674.6
57,5°	68.3	63.5	58.2	53.5	49.7	46.3	43.8	41.5	39.6	38.3	37.7	37.2	37.0	41.1	715.7
60,0°	61.9	55.6	50.8	46.8	43.8	41.0	38.9	37.0	35.4	34.3	33.7	33.3	33.2	42.3	758.0
62,5°	52.7	47.9	44.6	41.6	38.4	36.4	34.3	32.8	31.5	30.5	29.9	29.4	29.3	42.6	800.5
65,0°	45.4	41.7	39.1	36.4	34.0	32.4	30.6	29.3	28.3	27.4	26.9	26.6	26.4	41.7	842.2
67,5°	38.1	35.8	33.7	31.6	29.8	28.7	27.4	26.2	25.2	24.5	23.9	23.4	23.3	39.6	881.8
70,0°	32.0	30.3	29.0	27.6	26.3	25.1	24.2	23.2	22.4	21.6	21.0	20.7	20.7	37.3	919.1
72,5°	27.1	25.2	24.2	23.4	22.5	21.7	20.8	20.0	19.2	18.3	18.0	17.5	17.6	32.6	951.7
75,0°	22.0	20.9	19.9	19.4	18.7	18.1	17.3	16.7	15.9	15.3	14.8	14.5	14.2	24.1	975.8
77,5°	18.0	17.3	16.5	15.7	15.1	14.4	14.1	13.4	12.8	12.2	11.5	11.3	11.2	13.5	989.3
80,0°	14.5	13.7	13.1	12.4	11.8	11.2	10.6	10.0	9.3	8.7	8.4	8.0	7.9	6.3	995.6
82,5°	10.7	10.3	9.9	9.4	8.8	8.2	7.4	6.8	6.2	5.8	5.5	5.2	5.2	2.5	998.2
85,0°	5.7	5.7	5.6	5.5	5.3	4.8	4.4	3.9	3.5	3.1	2.8	2.1	2.5	1.3	999.4
87,5°	1.4	1.3	1.3	1.3	1.3	1.4	1.3	1.2	1.1	0.9	0.6	0.5	0.4	0.6	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Streetlight 11 mini LED	Order number: 5XC2HC1F08GE EAN: 4069025225412	LP number 59339_265
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	3550	24.9	25.7	25.3
95	241	252	3368	23.6	24.3	24.0
90	229	250	3201	22.4	23.1	22.8
85	216	248	3019	21.2	21.7	21.4
80	203	246	2837	19.9	20.5	20.2
75	190	243	2656	18.7	19.2	19.0
70	178	241	2488	17.5	18.0	17.8
65	165	238	2306	16.3	16.7	16.5
60	152	235	2124	15.1	15.5	15.3
55	140	232	1957	14.0	14.3	14.2
50	127	229	1775	12.8	13.1	13.0
45	114	225	1593	11.6	11.9	11.8
40	102	221	1426	10.6	10.9	10.8
35	89	216	1244	9.4	9.6	9.5
30	76	210	1062	8.2	8.4	8.3
25	63	203	881	7.1	7.3	7.2
20	51	195	713	6.1	6.2	6.2
15	38	184	531	4.9	5.0	5.0
11	29	175	405	4.0	4.1	4.0