


Photometric test report

Family Floodlight FL11	Order number: 5XA779115G01AB EAN: 4069025138897		LP number 59242_24
	Version	standard bracket	serial documentation 07.08.2024
	Optic	asymmetric distribution PL33	
	Cover	toughened safety glass	siteco
	Lamps	LED 3000 K CRI ≥ 70	
	Controlgear	ECG-DALI	
	Rated values	Ta = 0 °C Net luminous flux = 119450 lm Power consumption = 1016.7 W Luminous efficacy = 117.5 lm/W	

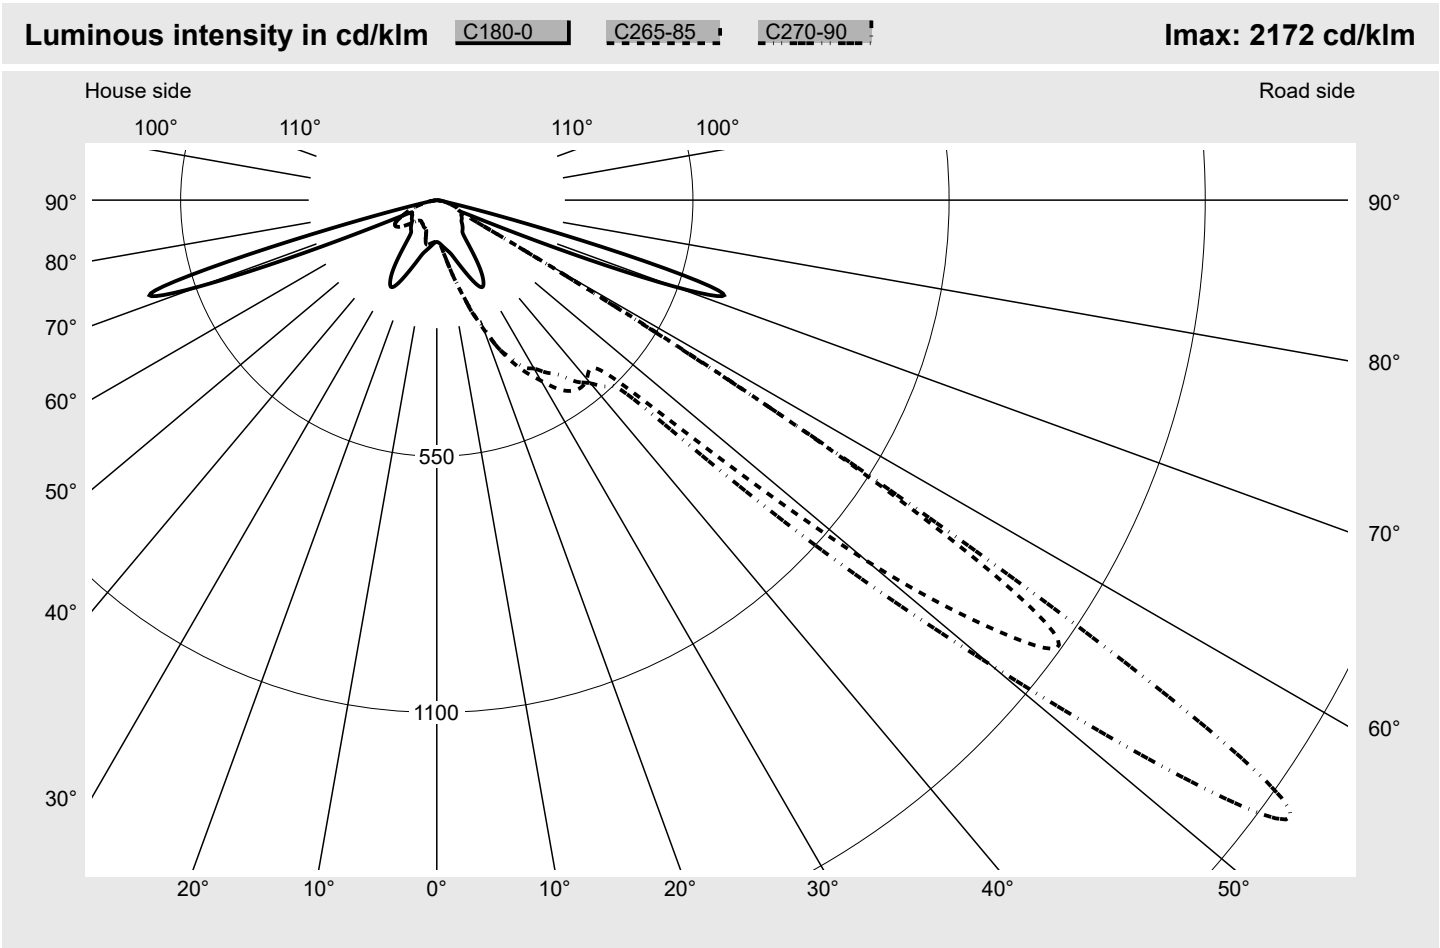

Luminaire output ratios		Luminous intensity class acc. to EN13201-2	
Eta	100.0%	Class:	G3
Eta 0° - 90°	100.0%	Imax 70°	597.1
Eta 90° - 180°	0.0%	Imax 80°	17.6
		Imax 90°	0.0
		Imax >90°	0.0
		Imax >95°	0.0
Measurement conditions			
DIN EN 13032 and DIN 5032			

Photometric test report

Family
Floodlight FL11

Order number: 5XA779115G01AB
EAN: 4069025138897

LP number
59242_24

Envelope curve in cd/klm


KMK 55°

KMK 52,5°

KMK 50°

KMK 47,5°

siteco

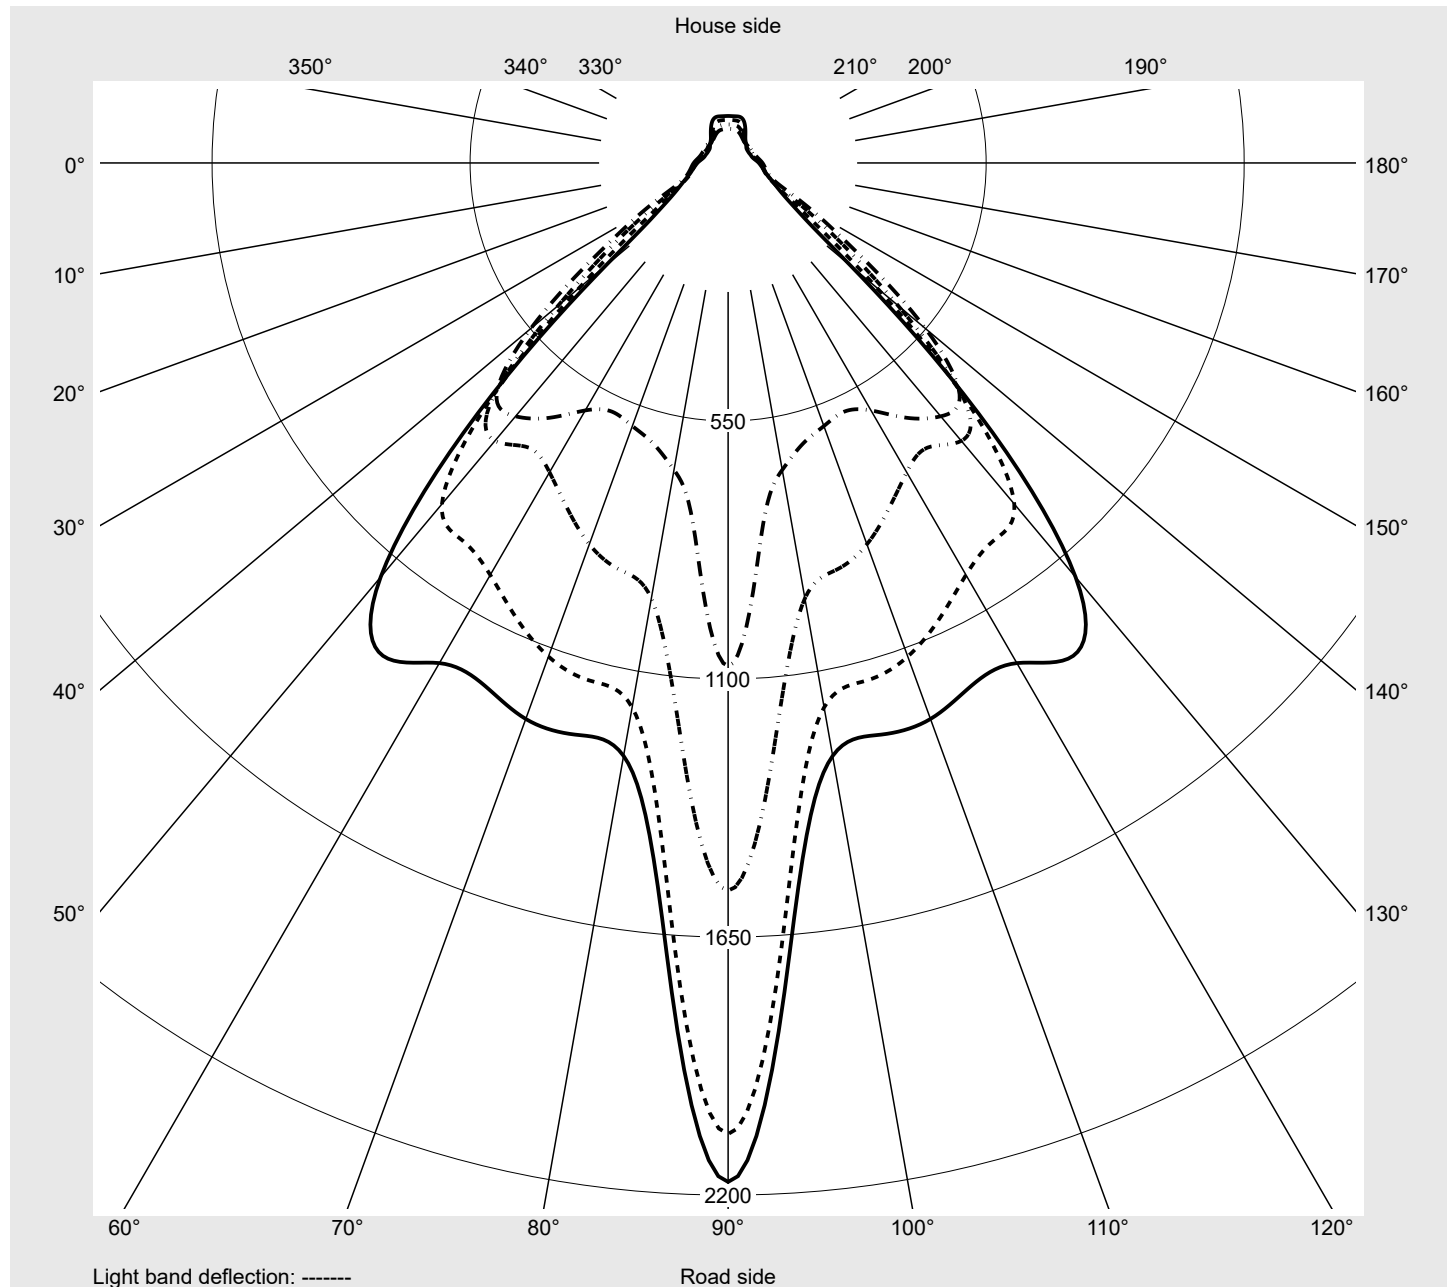

Photometric test report

Family Floodlight FL11		Order number: 5XA779115G01AB EAN: 4069025138897										LP number 59242_24	
Table of values for luminous intensities										Maximum luminous intensity		siteco	
C- planes	0° 180°	5° 175°	10° 170°	15° 165°	20° 160°	25° 155°	30° 150°	35° 145°	40° 140°	45° 135°	50° 130°	55° 125°	60° 120°
γ	Luminous intensity in cd/klm												
0,0°	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8
2,5°	91.5	91.5	91.5	91.5	91.4	91.4	91.4	91.3	91.3	91.1	91.0	90.8	90.7
5,0°	95.2	95.2	95.2	95.2	95.2	95.3	95.3	95.5	95.7	96.0	96.3	96.5	96.8
7,5°	100.2	100.4	100.5	100.8	101.3	102.2	103.5	105.3	107.5	109.8	111.9	113.5	114.7
10,0°	105.8	106.2	107.0	108.6	111.6	116.4	122.5	129.1	135.2	140.2	143.8	145.7	146.4
12,5°	112.1	113.1	115.7	121.6	131.3	144.1	157.4	169.6	179.5	186.5	190.4	191.4	190.0
15,0°	120.4	122.6	128.8	141.9	160.7	181.8	202.2	219.9	233.4	242.1	245.8	245.1	241.2
17,5°	134.5	138.5	149.5	171.2	199.2	229.9	259.8	286.2	305.8	318.3	322.2	318.2	308.4
20,0°	152.8	158.9	175.6	206.0	243.9	283.9	321.1	353.7	381.0	403.2	416.3	417.4	403.5
22,5°	174.6	184.5	207.6	245.0	286.4	326.0	360.0	390.0	418.1	446.4	472.3	492.4	498.8
25,0°	197.6	211.8	239.8	280.3	323.3	362.1	394.1	421.8	448.3	473.9	499.0	523.6	544.2
27,5°	210.6	231.0	265.1	311.5	358.9	394.2	432.5	461.6	487.5	509.2	526.0	540.7	555.4
30,0°	199.9	224.4	264.4	318.7	373.6	420.8	461.4	497.4	526.8	545.2	553.0	555.1	555.9
32,5°	170.4	195.6	237.8	296.3	357.8	416.7	471.0	523.3	563.4	580.0	578.1	569.0	556.7
35,0°	125.9	145.1	184.1	244.4	313.8	385.9	456.6	529.2	591.2	613.1	600.8	579.7	557.3
37,5°	94.1	102.5	125.5	172.6	242.7	332.8	425.5	518.8	603.0	639.5	623.0	589.3	559.1
40,0°	85.7	90.2	99.2	122.6	168.2	254.5	372.1	499.6	603.2	659.3	649.4	603.5	559.7
42,5°	82.2	86.8	91.9	105.4	133.5	195.4	301.4	467.2	603.5	670.8	671.6	618.2	556.5
45,0°	78.1	82.7	87.0	94.8	113.2	162.3	246.8	402.6	593.1	680.7	686.3	637.4	564.7
47,5°	73.3	77.5	82.1	88.7	101.2	135.8	215.6	342.7	549.3	697.8	705.0	663.1	609.1
50,0°	69.1	73.5	77.9	83.6	94.0	118.1	177.3	287.9	472.3	710.1	773.4	740.8	761.4
52,5°	67.6	71.9	76.1	81.8	92.2	112.4	148.9	227.9	413.8	722.9	948.9	984.2	1014.1
55,0°	65.5	70.4	76.3	83.3	94.6	111.0	136.0	186.8	341.8	754.2	1152.2	1282.6	1231.0
57,5°	62.8	69.6	78.6	88.1	100.7	114.8	134.9	171.7	221.3	573.8	1000.2	1255.1	1253.7
60,0°	61.1	70.0	82.1	95.0	107.8	118.2	131.7	162.4	154.5	186.0	429.5	717.8	757.9
62,5°	61.7	73.7	88.4	102.5	113.0	115.9	116.9	134.3	133.0	93.1	107.9	177.8	237.9
65,0°	67.6	85.8	98.8	105.9	108.2	102.7	95.3	97.6	106.1	75.7	61.5	64.5	70.9
67,5°	202.1	253.8	217.4	146.6	99.5	80.2	71.1	66.2	68.4	61.9	51.6	51.2	52.0
70,0°	541.8	597.1	448.5	245.3	109.9	61.0	52.1	46.8	48.0	48.2	45.4	45.2	44.8
72,5°	615.2	573.0	359.3	204.2	107.4	49.3	37.3	35.4	37.3	38.7	38.3	38.0	37.0
75,0°	235.5	183.2	99.8	46.0	59.2	36.6	27.6	28.3	29.7	30.7	30.1	30.5	29.7
77,5°	41.7	38.1	28.1	25.3	26.3	21.8	20.4	21.4	22.4	23.0	22.9	23.1	22.8
80,0°	16.8	15.0	14.0	15.7	16.3	14.4	14.0	14.5	15.8	15.9	15.5	15.5	15.5
82,5°	9.2	8.4	8.4	9.0	9.8	8.5	8.6	8.7	9.0	9.1	8.8	9.1	9.1
85,0°	4.1	4.0	3.9	4.1	4.5	4.1	4.0	4.1	3.9	3.9	3.8	3.7	3.6
87,5°	1.2	1.2	1.2	1.2	1.2	1.1	1.1	1.0	1.0	1.1	1.1	1.2	1.2
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11	Order number: 5XA779115G01AB EAN: 4069025138897	LP number 59242_24
---------------------------	--	-----------------------

Table of values for luminous intensities	Maximum luminous intensity	siteco
--	----------------------------	--------

C- planes	65° 115°	70° 110°	75° 105°	80° 100°	85° 95°	90°	185° 355°	190° 350°	195° 345°	200° 340°	205° 335°	210° 330°	215° 325°
γ	Luminous intensity in cd/klm												
0,0°	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8
2,5°	90.6	90.5	90.5	90.5	90.5	91.0	91.5	91.4	91.4	91.3	91.1	90.9	90.8
5,0°	97.0	97.3	97.5	97.6	97.8	97.1	95.2	95.1	95.0	94.7	94.5	94.2	93.9
7,5°	115.3	115.6	115.6	115.5	115.4	115.6	100.2	100.0	99.8	99.5	99.1	98.7	98.2
10,0°	146.1	144.9	143.3	141.7	140.7	138.6	105.6	105.3	105.0	104.6	104.1	103.4	102.7
12,5°	186.9	182.6	178.1	174.1	171.5	171.1	111.6	111.1	110.6	110.0	109.2	108.4	107.5
15,0°	234.8	226.9	218.9	211.8	207.2	203.5	119.3	118.4	117.4	116.3	115.0	113.7	112.3
17,5°	295.5	281.5	268.1	256.9	249.9	253.2	132.0	129.4	127.2	124.7	122.1	119.6	117.2
20,0°	378.0	348.5	324.0	306.1	295.5	288.8	148.9	143.7	138.8	133.9	129.2	124.8	120.5
22,5°	483.5	442.8	394.0	359.9	342.6	342.5	167.4	159.4	150.6	142.1	134.3	127.2	117.8
25,0°	550.9	530.3	475.3	415.0	383.3	372.8	185.3	172.4	158.7	146.0	135.3	122.8	106.5
27,5°	568.0	568.5	541.2	474.2	418.0	404.5	192.6	174.7	157.4	143.0	129.9	111.7	90.8
30,0°	559.1	562.9	558.1	518.8	447.7	417.8	179.2	160.0	143.8	132.6	119.1	99.6	82.3
32,5°	545.2	540.7	542.3	535.6	479.5	439.2	151.0	135.0	124.0	117.5	107.2	93.8	80.9
35,0°	532.7	514.8	512.4	520.9	500.1	457.9	113.7	106.3	103.0	101.2	96.8	90.0	81.1
37,5°	526.3	498.0	489.1	503.8	507.6	491.0	89.5	87.2	87.0	87.2	88.3	85.8	79.6
40,0°	518.5	481.7	466.2	480.1	501.2	513.5	81.8	78.8	76.6	75.7	77.8	79.3	76.4
42,5°	507.6	465.9	442.4	452.3	490.2	542.3	77.9	74.4	71.1	68.4	68.1	70.6	70.5
45,0°	511.6	479.8	466.4	486.5	550.9	631.0	73.4	69.2	66.0	63.5	61.7	62.2	64.0
47,5°	585.1	596.8	618.7	664.4	802.2	1072.3	68.4	64.0	61.1	59.5	58.5	57.2	58.1
50,0°	811.9	865.0	897.1	942.5	1205.4	1551.1	64.0	59.7	57.3	56.0	55.3	54.2	54.0
52,5°	1069.4	1119.6	1142.1	1178.4	1521.9	2069.9	61.6	56.8	54.3	53.0	52.3	51.6	51.3
55,0°	1228.9	1261.2	1261.5	1283.4	1615.2	2171.9	60.0	55.1	52.1	50.8	49.5	49.0	49.2
57,5°	1152.5	1053.1	965.7	941.7	1046.1	1101.7	58.2	53.7	50.3	48.5	47.1	46.7	47.8
60,0°	663.1	519.9	400.3	320.4	250.2	237.0	55.2	52.5	49.2	47.0	46.3	46.7	49.1
62,5°	224.4	162.5	113.0	83.8	69.7	64.1	53.6	50.0	49.2	49.6	50.2	51.6	54.6
65,0°	69.9	62.0	56.1	53.5	51.6	52.0	55.0	49.9	51.9	55.1	58.6	61.6	63.8
67,5°	52.7	51.4	54.6	59.3	50.8	47.3	107.8	63.9	64.5	67.6	71.0	70.9	69.2
70,0°	45.5	46.1	72.5	82.0	52.1	42.8	265.1	114.3	76.8	71.5	67.9	62.6	57.9
72,5°	36.9	37.0	52.0	55.7	42.7	32.5	206.7	63.3	45.3	48.2	42.3	37.3	34.5
75,0°	29.1	28.7	34.3	37.2	30.5	25.1	69.9	29.5	25.0	25.6	24.2	23.1	23.3
77,5°	22.0	21.2	24.4	25.9	22.5	17.9	25.7	20.0	17.9	17.6	17.1	16.9	17.0
80,0°	15.1	14.5	15.9	16.4	14.7	13.0	16.8	14.1	12.4	11.8	11.4	11.2	11.1
82,5°	8.8	8.5	8.8	8.9	8.3	7.4	9.9	8.7	7.6	7.0	6.7	6.3	6.3
85,0°	3.5	3.4	3.3	3.3	3.2	3.4	4.2	4.0	3.6	3.2	3.0	2.9	2.7
87,5°	1.2	1.2	1.3	1.3	1.3	1.3	1.2	1.2	1.1	1.0	1.0	1.0	1.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Photometric test report

Family Floodlight FL11				Order number: 5XA779115G01AB EAN: 4069025138897								LP number 59242_24	
Table of values for luminous intensities										Maximum luminous intensity		sīteco	
C- planes	220° 320°	225° 315°	230° 310°	235° 305°	240° 300°	245° 295°	250° 290°	255° 285°	260° 280°	265° 275°	270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm										Luminous flux in lm/klm		
0,0°	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	89.8	0.1	0.1
2,5°	90.6	90.4	90.2	90.1	90.0	89.9	89.9	89.9	89.9	89.8	89.9	1.1	1.2
5,0°	93.6	93.2	92.9	92.5	92.2	92.0	91.8	91.7	91.7	91.5	91.5	2.3	3.5
7,5°	97.6	96.9	96.3	95.7	95.2	94.7	94.3	94.1	93.8	93.6	93.6	3.7	7.2
10,0°	101.9	101.1	100.3	99.5	98.7	98.1	97.5	97.0	96.7	96.4	96.2	5.5	12.7
12,5°	106.5	105.5	104.3	103.2	102.2	101.2	100.2	99.4	98.7	98.0	97.7	7.9	20.6
15,0°	110.8	109.1	107.4	105.4	102.9	100.3	97.8	95.6	94.0	92.8	92.3	11.0	31.6
17,5°	114.8	111.6	105.9	98.3	90.9	85.4	81.8	79.6	78.0	76.7	76.0	14.8	46.4
20,0°	114.8	105.1	92.8	82.1	75.2	71.8	70.3	69.7	68.8	67.5	66.9	19.5	65.9
22,5°	104.2	88.8	77.3	72.6	70.6	69.0	67.8	67.3	66.7	65.8	65.3	24.7	90.6
25,0°	89.2	76.8	72.0	70.5	69.2	67.9	66.8	66.0	65.5	64.8	64.4	29.7	120.3
27,5°	76.9	70.8	69.7	69.0	68.1	67.1	65.7	64.4	63.5	62.8	62.4	34.3	154.6
30,0°	71.9	69.2	68.3	67.7	66.8	65.3	63.4	61.8	60.7	60.1	59.8	37.9	192.5
32,5°	72.4	68.3	66.8	65.7	64.4	62.9	61.3	59.8	59.0	58.6	58.3	40.3	232.9
35,0°	72.6	67.2	64.7	63.2	62.1	61.0	59.7	58.2	57.2	56.7	56.3	41.4	274.3
37,5°	72.1	65.4	62.2	61.1	60.5	59.3	58.2	57.2	56.6	56.1	55.8	41.9	316.2
40,0°	70.3	63.7	60.2	59.3	58.8	58.3	58.0	57.9	57.7	57.4	57.0	42.3	358.5
42,5°	66.7	61.7	58.5	57.7	58.1	59.0	59.7	60.3	60.6	60.2	59.9	42.9	401.5
45,0°	63.0	59.4	56.8	57.1	58.8	61.0	63.2	64.7	65.5	65.4	65.1	44.9	446.4
47,5°	59.3	57.2	56.0	57.5	60.6	64.6	68.7	71.4	72.5	72.7	72.5	51.9	498.3
50,0°	55.3	55.8	56.0	58.7	63.7	70.2	76.5	80.7	81.8	82.1	82.1	64.5	562.8
52,5°	52.4	54.9	56.6	60.9	68.2	77.5	86.3	91.1	92.0	91.9	92.0	79.7	642.5
55,0°	50.7	54.7	58.4	64.1	73.8	85.8	96.4	101.2	100.9	100.2	100.1	90.6	733.1
57,5°	50.6	55.4	61.1	68.5	80.1	93.6	104.7	108.4	106.3	104.5	104.1	77.5	810.6
60,0°	52.8	58.4	66.7	74.1	84.9	98.4	108.8	110.7	106.6	103.7	103.1	43.6	854.2
62,5°	58.4	65.0	80.6	89.5	87.7	99.2	107.7	107.4	101.3	97.4	96.4	23.9	878.1
65,0°	65.8	71.8	102.3	119.4	92.6	95.1	100.2	97.4	89.2	84.4	83.0	19.4	897.6
67,5°	68.0	70.4	111.1	138.4	101.7	85.1	85.3	81.6	74.2	71.7	69.5	22.2	919.7
70,0°	55.5	55.7	82.1	117.3	93.8	75.8	73.7	69.5	61.4	61.7	58.0	29.7	949.4
72,5°	36.4	39.0	47.1	64.2	63.4	60.8	59.8	54.4	47.5	49.2	46.7	24.9	974.3
75,0°	25.7	29.6	34.7	40.9	45.3	45.0	43.1	36.9	32.0	34.4	33.0	12.1	986.4
77,5°	18.1	21.0	23.8	26.7	29.4	30.9	29.2	24.5	21.7	22.1	21.7	6.3	992.8
80,0°	11.4	12.8	14.5	15.8	16.7	17.6	15.7	13.6	12.3	11.6	11.4	3.9	996.7
82,5°	6.4	6.8	7.3	7.3	7.8	7.8	6.6	5.8	5.3	5.1	5.1	2.1	998.8
85,0°	2.6	2.6	2.4	2.3	2.0	1.9	2.0	2.0	2.0	2.0	2.0	0.9	999.7
87,5°	1.0	1.1	1.1	1.1	1.1	1.2	1.2	1.2	1.3	1.3	1.3	0.3	1000.0
90,0°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

office	industry	traffic	retail	public	sports
--------	----------	---------	--------	--------	--------

Photometric test report

Family Floodlight FL11	Order number: 5XA779115G01AB EAN: 4069025138897	LP number 59242_24
Dimming levels table		environmental temperature: 0°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
99	252	254	118790	1008.5
95	237	251	113457	946.3
90	220	249	107605	878.7
85	204	246	101650	814.2
80	189	243	95639	752.6
75	174	240	89603	693.0
70	160	237	83676	637.2
65	146	234	77558	581.7
60	132	230	71461	528.5
55	120	227	65744	480.8
50	108	223	59937	434.1
45	95	218	53521	384.5
40	84	213	47845	342.3
35	72	208	41559	297.1
30	61	202	35689	256.2
25	50	194	29712	215.6
20	40	186	23919	179.8
15	30	176	18099	135.8
10	20	161	12102	95.4
5	10	136	6141	54.7
1	3	91	1767	27.0

Dimming levels table		environmental temperature: 25°C
----------------------	--	---------------------------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	----	----	----	----
95	----	----	----	----
90	----	----	----	----
85	----	----	----	----
80	----	----	----	----
76	174	240	86012	685.2
75	170	239	84493	669.5
70	156	236	78899	613.7
65	142	233	73156	559.0
60	129	229	67768	509.7
55	116	225	61985	459.3
50	104	221	56392	412.8
45	92	217	50695	367.6
40	80	212	44904	323.4
35	69	206	39310	282.5
30	59	201	34011	245.1
25	48	193	28243	206.6
20	38	185	22721	170.0
15	28	173	16757	125.6
10	19	159	11493	90.4
5	9	132	5487	49.6
2	3	92	1764	26.5

Photometric test report

Family Floodlight FL11	Order number: 5XA779115G01AB EAN: 4069025138897	LP number 59242_24
Luminousfluxs table		siteco

Temperature °C	Luminous flux lm	Power consumption W
0.0	119450.0	1016.7
25.0	86550.0	690.9