


Photometric test report

Family Monsun® 11	Order number: 51FP10FP460L EAN: 4069025268877	LP number 58939_162
	Version	prismatic diffuser, opal, PMMA, wide distribution
	Lamps	LED 4000 K CRI ≥ 80
	Controlgear	ECG-DALI CLO
	Rated values	Net luminous flux = 6050 lm Power consumption = 31.5 W Luminous efficacy = 192.1 lm/W
		serial documentation 14.10.2024
		siteco

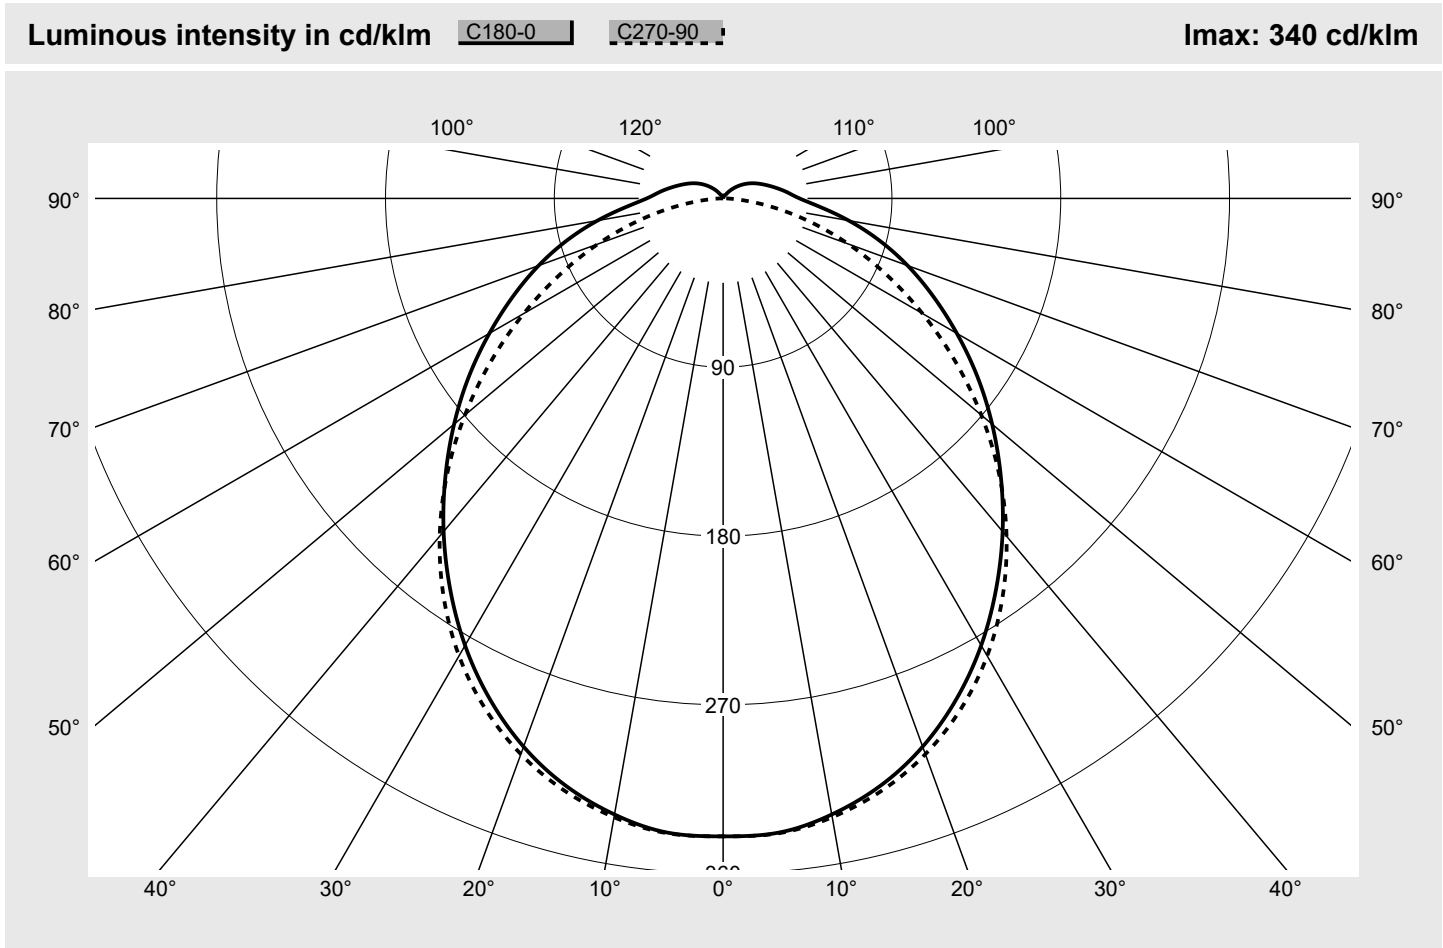

Classifications		Luminaire light output ratios	
DIN 5040	A 4 1	η_{LB}	100.0%
CIE	N1=47 N2=77 N3=93	ϕ_u	94.2%
	N4=94 N5=100	ϕ_o	5.8%

Measurement conditions	
DIN EN 13032 and DIN 5032	

Photometric test report

Family Monsun® 11	Order number: 51FP10FP460L EAN: 4069025268877	LP number 58939_162
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	340.1	340.1	340.1	340.1	340.1	340.1	340.1	2.0	2.0
5°	339.4	338.3	336.5	337.9	339.5	339.4	339.8	16.2	18.2
10°	333.5	333.0	331.2	332.8	334.6	334.7	335.0	31.7	49.9
15°	324.2	324.2	322.5	324.2	326.1	326.4	326.9	46.1	96.0
20°	311.0	311.6	310.1	311.9	314.1	314.7	315.3	58.6	154.6
25°	294.4	295.4	294.1	296.0	298.4	299.4	300.2	68.7	223.4
30°	275.2	276.6	275.1	276.8	279.4	280.7	281.6	76.1	299.5
35°	253.9	255.2	253.8	254.9	257.1	258.4	259.7	80.5	380.0
40°	231.8	232.9	231.3	231.1	232.5	233.8	235.1	81.9	461.9
45°	209.4	209.9	207.8	205.9	206.1	206.6	208.2	80.4	542.4
50°	187.2	187.1	184.8	181.3	179.3	178.3	179.7	76.6	619.0
55°	165.5	164.8	162.1	157.0	153.1	150.2	150.9	70.7	689.7
60°	143.9	142.9	139.5	133.7	127.9	123.2	122.7	63.3	753.0
65°	123.6	122.5	117.8	111.0	104.2	97.9	96.0	54.9	808.0
70°	104.7	103.3	97.1	89.4	81.7	74.3	71.0	45.8	853.8
75°	86.1	84.4	77.8	69.2	60.2	52.2	47.8	36.3	890.0
80°	68.0	66.1	60.2	50.5	40.7	32.1	26.9	26.7	916.7
85°	51.8	50.0	44.6	35.3	24.7	15.7	10.1	18.3	935.0
90°	40.8	39.2	34.4	26.0	15.9	6.9	1.8	13.1	948.2
95°	34.8	33.5	29.7	22.7	13.6	5.1	1.6	11.2	959.3
100°	29.9	28.8	25.4	19.2	11.3	3.7	1.4	9.4	968.7
105°	25.7	24.7	21.4	16.1	8.8	2.4	1.2	7.7	976.4
110°	22.1	20.9	18.0	13.0	6.6	1.4	1.1	6.1	982.5
115°	19.0	17.8	15.0	10.4	4.7	1.2	1.1	4.9	987.4
120°	16.0	14.8	12.2	7.9	3.1	1.2	1.0	3.8	991.2
125°	13.0	11.9	9.4	5.6	1.7	1.1	0.9	2.7	993.9
130°	10.1	9.1	6.9	3.7	1.4	1.1	1.0	1.9	995.9
135°	7.3	6.5	4.6	2.1	1.4	1.1	1.1	1.3	997.1
140°	4.8	4.1	2.7	1.7	1.4	1.1	1.1	0.8	998.0
145°	2.6	2.3	1.9	1.7	1.4	1.2	1.2	0.5	998.5
150°	2.0	2.0	1.9	1.6	1.3	1.3	1.3	0.4	998.9
155°	1.9	1.9	1.7	1.6	1.4	1.4	1.4	0.4	999.3
160°	1.7	1.7	1.6	1.4	1.4	1.4	1.4	0.3	999.6
165°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.2	999.8
170°	1.3	1.4	1.4	1.4	1.4	1.4	1.4	0.1	999.9
175°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.1	1000.0
180°	1.4	1.4	1.4	1.4	1.4	1.4	1.4	0.0	1000.0

Photometric test report

Family Monsun® 11	Order number: 51FP10FP460L EAN: 4069025268877	LP number 58939_162
----------------------	--	------------------------

UGR-Table		Standard room							siTeco		
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	20.1	21.8	20.4	22.1	22.4	20.1	21.8	20.4	22.1	22.4
	3H	21.8	23.4	22.2	23.7	24.0	21.4	23.0	21.8	23.3	23.7
	4H	22.6	24.1	23.0	24.4	24.8	22.0	23.4	22.4	23.8	24.1
	6H	23.4	24.7	23.8	25.1	25.5	22.3	23.7	22.7	24.0	24.4
	8H	23.8	25.0	24.2	25.4	25.8	22.5	23.7	22.9	24.1	24.5
	12H	24.1	25.3	24.5	25.6	26.1	22.5	23.7	22.9	24.1	24.5
4H	2H	20.8	22.2	21.2	22.6	22.9	20.8	22.2	21.2	22.6	22.9
	3H	22.7	24.0	23.1	24.3	24.7	22.3	23.6	22.7	24.0	24.4
	4H	23.7	24.8	24.1	25.2	25.6	23.0	24.1	23.4	24.5	24.9
	6H	24.6	25.6	25.0	26.0	26.5	23.4	24.4	23.9	24.9	25.3
	8H	25.0	25.9	25.5	26.4	26.8	23.6	24.5	24.1	25.0	25.4
	12H	25.4	26.2	25.9	26.7	27.2	23.7	24.5	24.2	25.0	25.5
8H	4H	24.0	24.9	24.5	25.4	25.8	23.4	24.3	23.9	24.7	25.2
	6H	25.1	25.8	25.6	26.3	26.8	24.0	24.8	24.5	25.2	25.7
	8H	25.6	26.3	26.1	26.8	27.3	24.2	24.9	24.7	25.4	25.9
	12H	26.2	26.7	26.7	27.2	27.8	24.4	25.0	24.9	25.5	26.0
12H	4H	24.0	24.9	24.5	25.3	25.8	23.5	24.3	24.0	24.7	25.2
	6H	25.2	25.8	25.7	26.3	26.8	24.2	24.8	24.7	25.3	25.8
	8H	25.8	26.3	26.3	26.8	27.4	24.4	25.0	24.9	25.5	26.0

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		L = 1590 B = 87		H(C0) = 21 H(C90) = 21		H(C180) = 21 H(C270) = 21	
C- planes	γ	0°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°				
		Luminance in cd/m²									
	45°	10432.0	10496.6	10573.4	10794.5	11260.4	11884.0	12708.4			
	50°	9894.0	9930.7	10004.9	10157.5	10541.7	11133.9	12037.3			
	55°	9381.9	9392.8	9450.4	9524.8	9821.7	10339.3	11291.2			
	60°	8875.8	8868.3	8883.8	8911.9	9107.6	9535.1	10495.3			
	65°	8430.8	8410.6	8339.4	8286.5	8402.8	8724.5	9661.6			
	70°	8048.8	8003.3	7795.7	7648.4	7662.0	7870.8	8766.0			
	75°	7650.5	7578.2	7287.5	6991.9	6818.5	6888.8	7701.3			
	80°	7228.3	7108.3	6817.0	6291.5	5853.3	5658.5	6297.9			
	85°	6920.2	6773.7	6457.0	5798.1	4928.5	4223.0	4398.3			

Photometric test report

Family
Monsun® 11

Order number: 51FP10FP460L
EAN: 4069025268877

LP number
58939_162

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

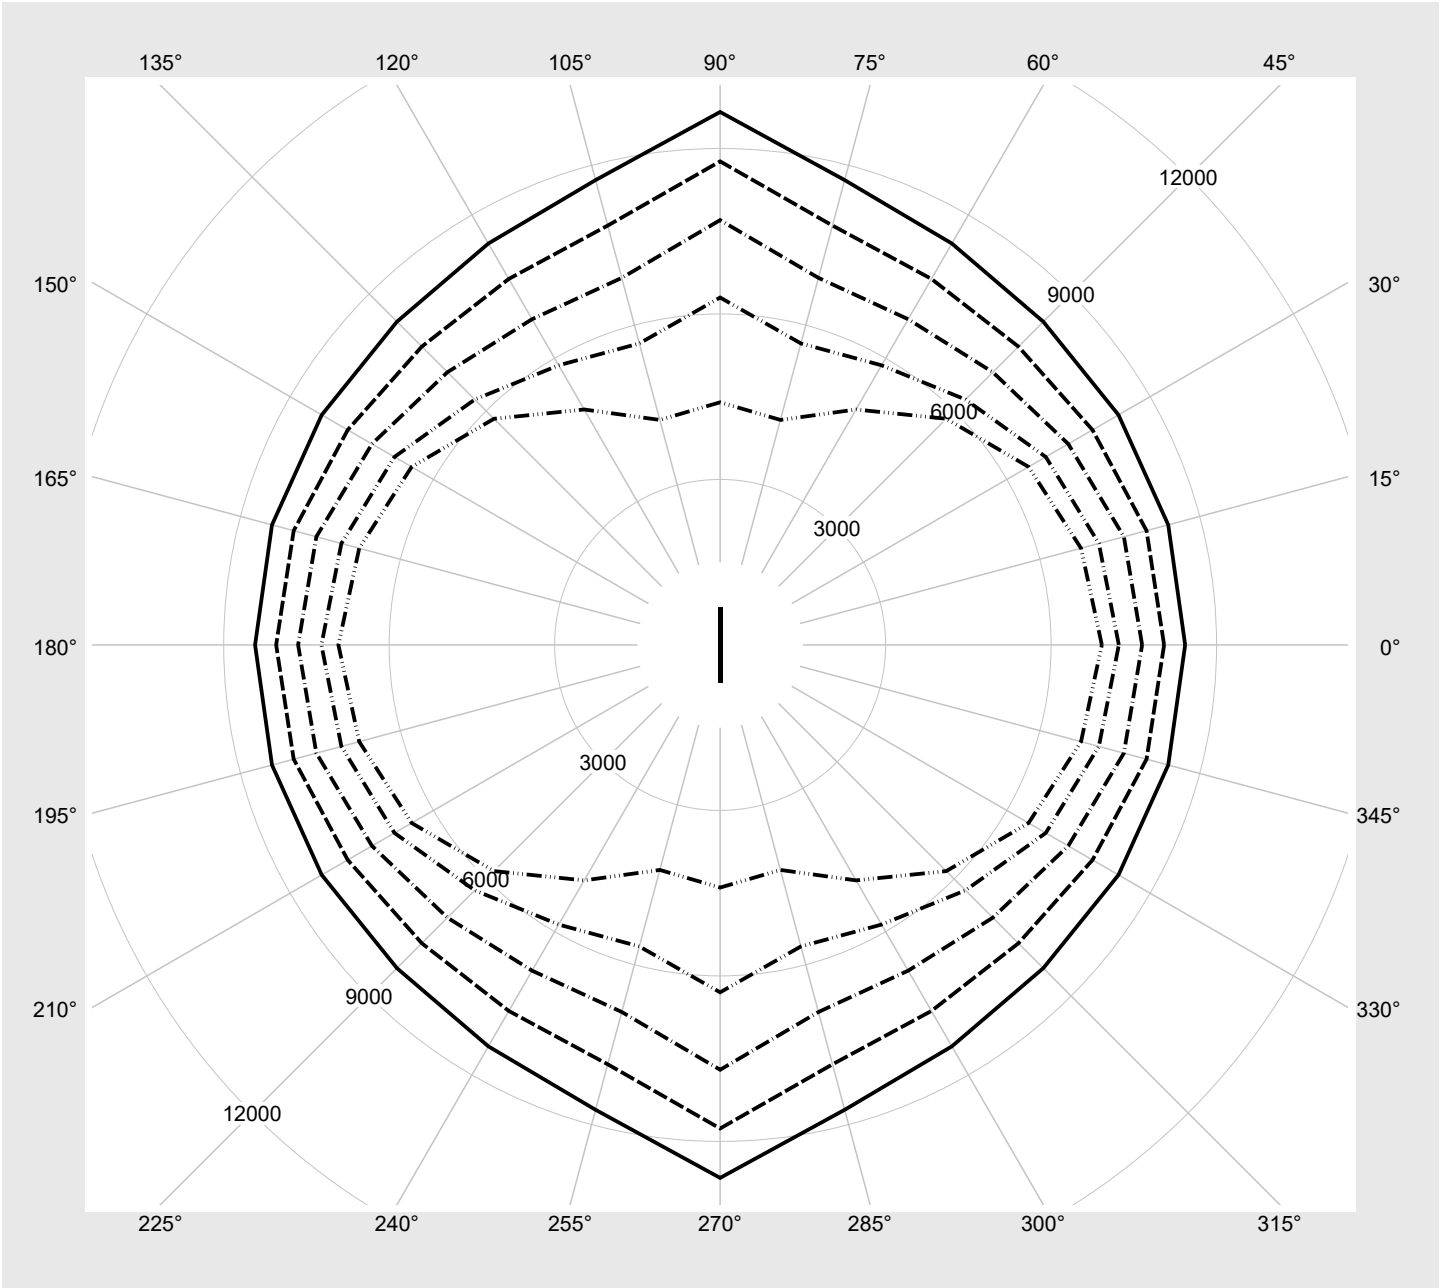

Photometric test report

Family Monsun® 11	Order number: 51FP10FP460L EAN: 4069025268877	LP number 58939_162
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W] start of lifetime	Power consumption [W] end of lifetime	Power consumption [W] average
100	254	254	6050	31.5	34.1	32.8
95	241	252	5757	30.0	32.4	31.2
90	227	250	5440	28.4	30.6	29.5
85	214	248	5144	27.0	29.0	28.0
80	201	245	4846	25.5	27.4	26.4
75	188	243	4546	24.0	25.9	25.0
70	175	240	4245	22.5	24.2	23.4
65	162	238	3941	21.0	22.6	21.8
60	149	234	3636	19.4	21.0	20.2
55	136	231	3329	17.9	19.3	18.6
50	123	227	3019	16.3	17.6	17.0
45	111	224	2732	14.8	16.0	15.4
40	98	219	2418	13.2	14.2	13.7
35	86	214	2128	11.6	12.5	12.0
30	73	208	1811	10.0	10.8	10.4
25	61	202	1516	8.5	9.2	8.8
20	49	194	1218	7.2	7.6	7.4
15	37	183	917	5.8	6.1	5.9
10	25	169	615	4.4	4.7	4.6
5	13	145	310	3.2	3.3	3.2
3	8	127	182	2.9	3.0	3.0