




Photometric test report

Family Trunking Flex 31	Order number: 51RF11DB4B5G5 EAN: 4069025515995	LP number 59298_33
	Version primary light control with lens, transparent, PMMA, narrow distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-DALI Rated values Net luminous flux = 11500 lm Power consumption = 64.5 W Luminous efficacy = 178.3 lm/W	serial documentation 12.06.2025
		

Luminous intensity in cd/klm C180-0 C270-90 Imax: 2264 cd/klm

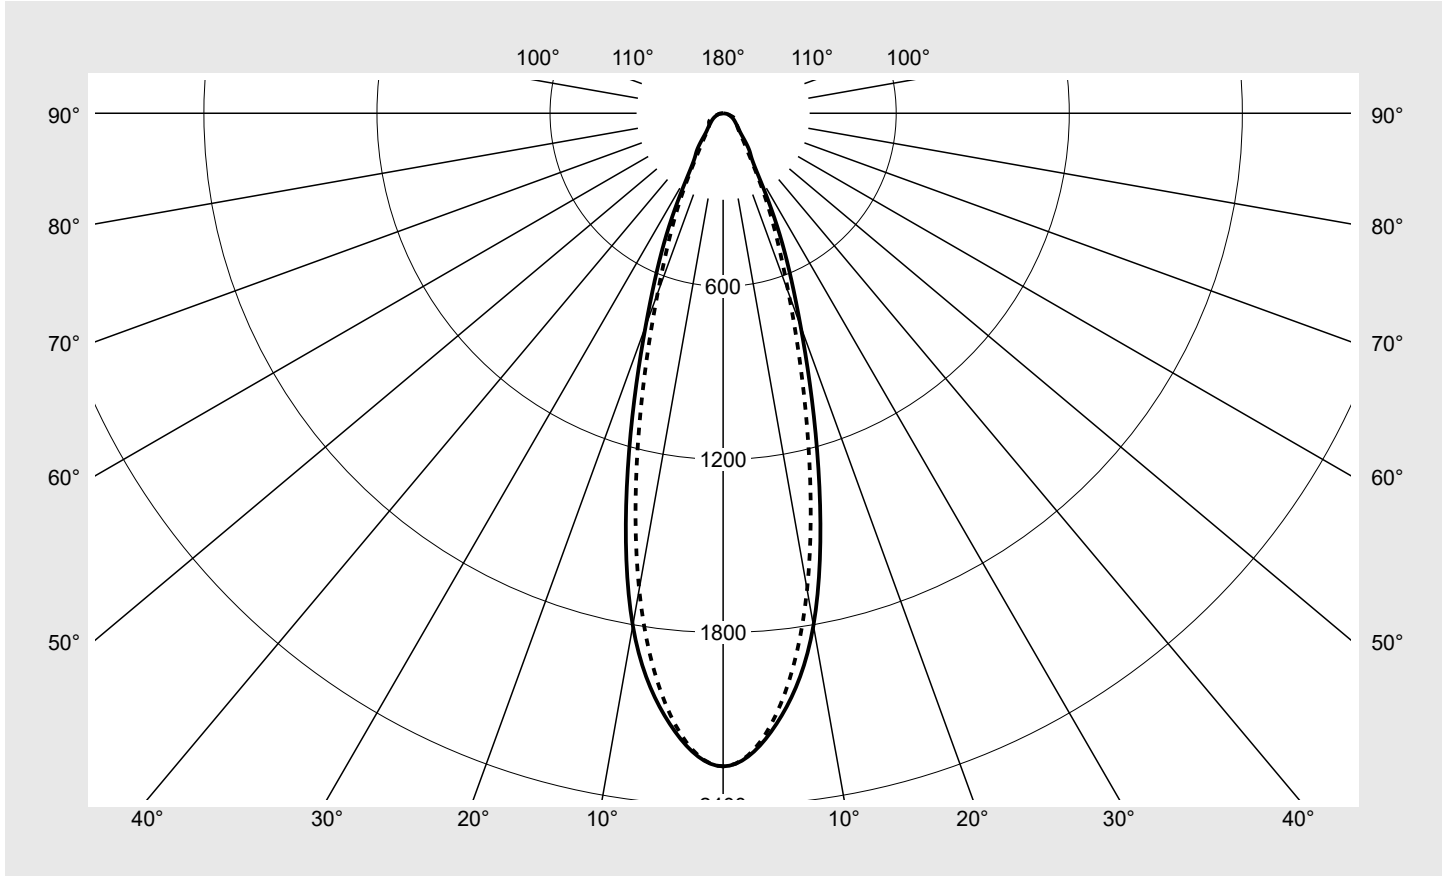

Classifications	
DIN 5040	A 7 1
CIE	N1=83 N2=93 N3=98 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	99.6%
ϕ_o	0.4%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Trunking Flex 31	Order number: 51RF11DB4B5G5 EAN: 4069025515995	LP number 59298_33
Table of values for luminous intensities		Maximum luminous intensity



C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	2264.0	2264.0	2264.0	2264.0	2264.0	2264.0	2264.0	13.5	13.5
5°	2124.6	2117.3	2110.0	2106.4	2102.8	2098.6	2094.4	100.7	114.2
10°	1803.1	1798.4	1793.7	1758.4	1723.0	1699.6	1676.2	166.8	281.0
15°	1276.6	1263.1	1249.6	1218.9	1188.2	1155.9	1123.7	172.0	453.0
20°	785.2	773.2	761.2	738.3	715.4	689.4	663.4	137.5	590.6
25°	464.9	459.0	453.1	430.5	408.0	399.6	391.2	99.5	690.1
30°	231.5	245.6	259.7	243.1	226.4	219.0	211.5	64.6	754.8
35°	159.7	155.6	151.5	146.8	142.0	136.2	130.5	46.0	800.7
40°	102.9	101.3	99.7	98.2	96.6	94.1	91.5	34.5	835.2
45°	75.8	74.7	73.5	74.4	75.2	73.4	71.7	28.7	863.9
50°	60.6	60.0	59.4	61.7	64.1	63.5	63.0	25.9	889.9
55°	50.2	50.1	50.0	53.9	57.9	58.8	59.6	24.4	914.2
60°	41.8	41.5	41.2	46.6	51.9	53.9	55.8	22.5	936.7
65°	33.8	33.4	32.9	37.5	42.1	45.1	48.0	19.2	955.9
70°	26.2	26.2	26.2	27.6	29.0	31.8	34.7	14.7	970.6
75°	20.4	20.2	20.1	21.5	22.8	21.7	20.6	11.2	981.8
80°	14.1	14.0	14.0	15.4	16.8	16.1	15.5	8.2	990.0
85°	7.7	7.7	7.8	9.4	11.0	10.5	10.0	5.0	995.0
90°	1.9	1.9	1.9	3.7	5.5	4.9	4.4	1.9	996.9
95°	0.0	0.0	0.0	1.4	2.7	3.0	3.2	0.8	997.7
100°	0.0	0.0	0.0	1.0	2.1	2.5	2.9	0.6	998.3
105°	0.0	0.0	0.0	1.0	1.9	2.2	2.5	0.6	998.9
110°	0.0	0.0	0.0	0.8	1.6	1.9	2.2	0.5	999.4
115°	0.0	0.0	0.0	0.7	1.3	1.5	1.8	0.4	999.7
120°	0.0	0.0	0.0	0.5	1.1	1.2	1.4	0.3	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Trunking Flex 31	Order number: 51RF11DB4B5G5 EAN: 4069025515995	LP number 59298_33
----------------------------	---	-----------------------

UGR-Table	Standard room	siteco	
-----------	---------------	--------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	17.3	18.5	17.6	18.8	19.1	18.4	19.6	18.8	19.9	20.3
	3H	18.5	19.6	18.9	19.9	20.3	20.0	21.1	20.4	21.5	21.8
	4H	19.1	20.1	19.5	20.4	20.8	20.6	21.6	21.0	21.9	22.3
	6H	19.6	20.5	20.0	20.8	21.2	21.1	22.0	21.5	22.3	22.7
	8H	19.9	20.6	20.3	21.0	21.4	21.4	22.2	21.9	22.6	23.0
	12H	20.0	20.7	20.4	21.1	21.5	21.7	22.4	22.1	22.8	23.2
4H	2H	17.9	18.9	18.3	19.3	19.7	18.9	19.9	19.3	20.2	20.6
	3H	19.3	20.1	19.7	20.5	20.9	20.6	21.5	21.1	21.9	22.3
	4H	20.0	20.7	20.4	21.1	21.6	21.3	22.0	21.7	22.5	22.9
	6H	20.6	21.2	21.1	21.7	22.1	22.0	22.6	22.4	23.0	23.5
	8H	20.9	21.4	21.3	21.9	22.4	22.3	22.9	22.8	23.3	23.8
	12H	21.1	21.5	21.6	22.0	22.5	22.7	23.1	23.2	23.6	24.1
8H	4H	20.4	20.9	20.8	21.4	21.8	21.5	22.1	22.0	22.5	23.0
	6H	21.1	21.6	21.6	22.0	22.5	22.4	22.8	22.8	23.3	23.8
	8H	21.4	21.8	21.9	22.3	22.8	22.8	23.2	23.3	23.7	24.2
	12H	21.7	22.0	22.2	22.5	23.1	23.3	23.6	23.8	24.1	24.6
12H	4H	20.4	20.9	20.9	21.4	21.9	21.6	22.0	22.1	22.5	23.0
	6H	21.2	21.6	21.8	22.1	22.6	22.4	22.8	22.9	23.3	23.8
	8H	21.6	21.9	22.1	22.4	23.0	22.9	23.2	23.4	23.7	24.3

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	L = 1433 B = 61	H(C0) = 5 H(C90) = 5	H(C180) = 5 H(C270) = 5
-----------------	---------------------------------	-------------------------------	--------------------	-------------------------	----------------------------

C-planes	γ	Luminance in cd/m ²							
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	
45°	45°	13033.9	12862.2	12754.5	13050.4	13405.9	13337.0	13287.3	
50°	50°	11292.7	11206.1	11185.6	11786.5	12461.9	12632.6	12836.5	
55°	55°	10297.3	10301.9	10379.2	11383.1	12488.6	13019.1	13611.4	
60°	60°	9637.0	9587.8	9618.3	11087.7	12698.3	13600.3	14604.6	
65°	65°	8961.0	8867.6	8862.5	10338.3	11980.6	13326.6	14836.5	
70°	70°	8215.2	8260.2	8409.1	9102.5	9936.7	11466.0	13216.6	
75°	75°	7933.4	7921.7	8036.6	8903.0	9966.8	10107.4	10332.0	
80°	80°	7275.4	7301.9	7489.4	8668.0	10162.9	10723.0	11509.3	
85°	85°	5965.8	6098.5	6446.5	8405.9	11055.5	12388.0	14539.1	


Photometric test report

Family
Trunking Flex 31

Order number: 51RF11DB4B5G5
EAN: 4069025515995

LP number
59298_33

Luminance values in cd/m² γ 65° γ 70° γ 75° γ 80° γ 85° **siteco**

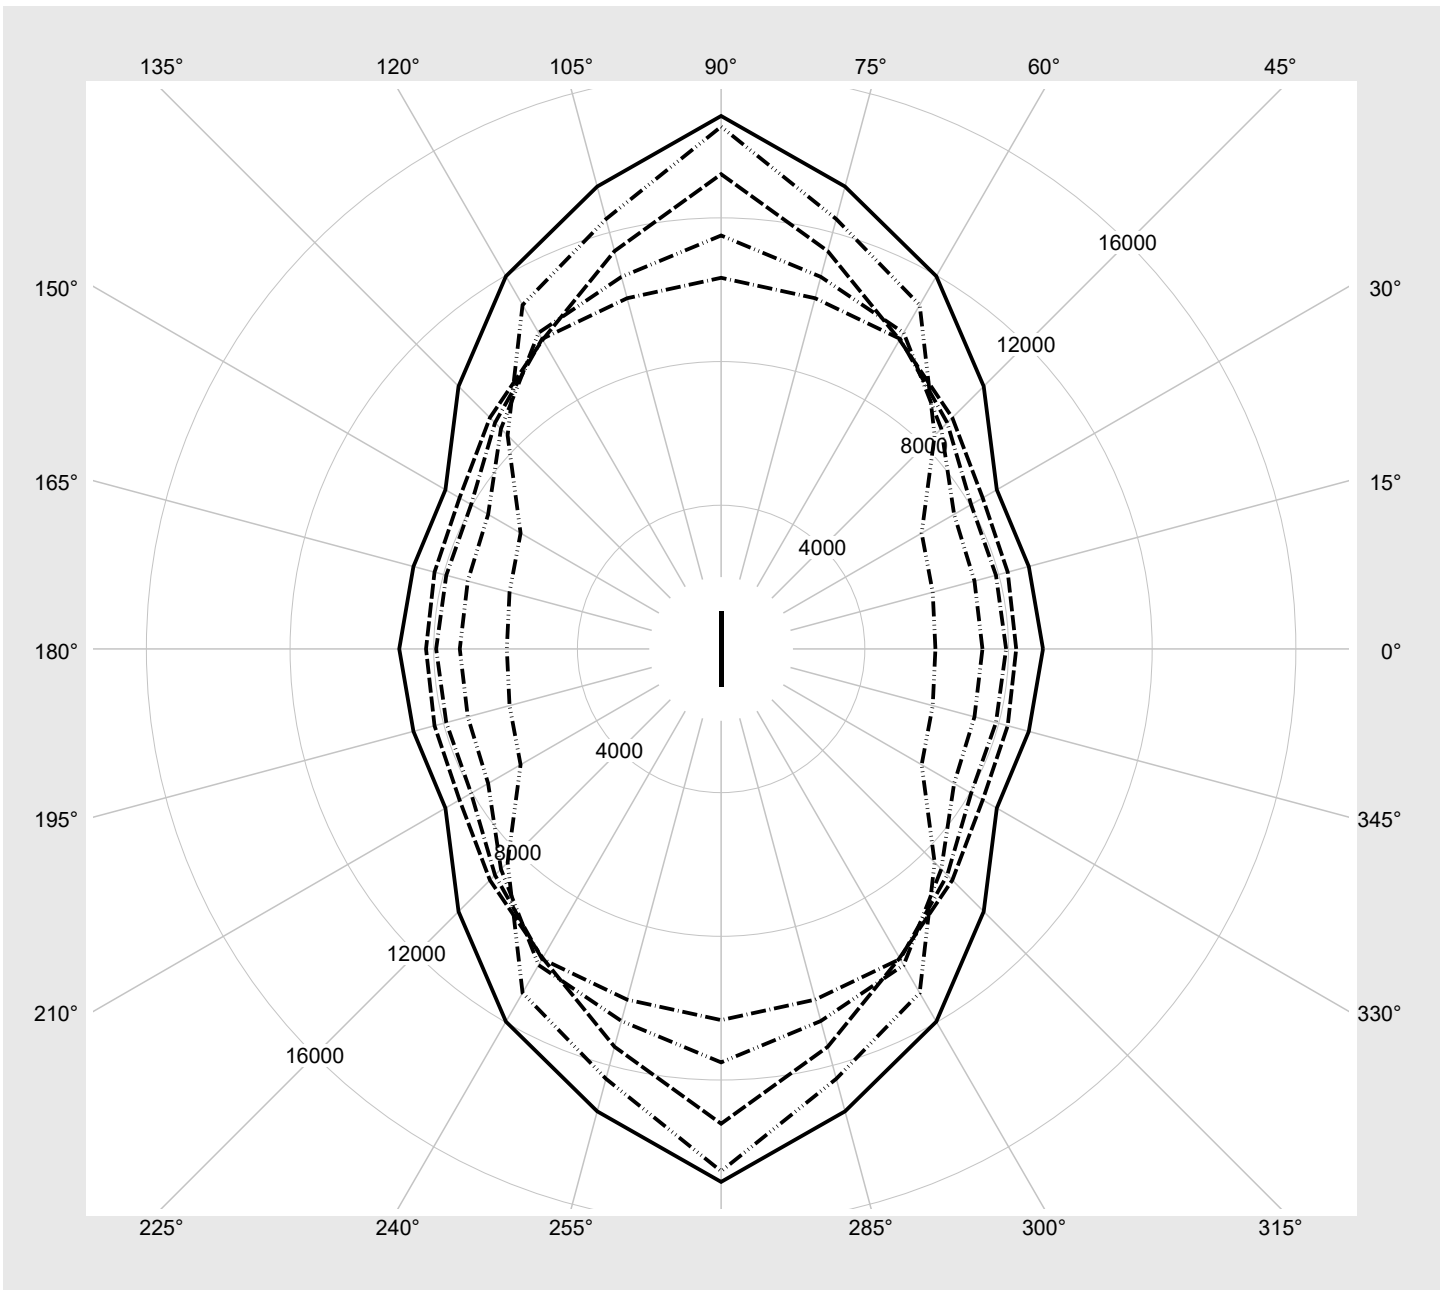

Photometric test report

Family Trunking Flex 31	Order number: 51RF11DB4B5G5 EAN: 4069025515995	LP number 59298_33
-----------------------------------	---	-------------------------------------

Dimming levels table	environmental temperature: 25°C	sITeco
-----------------------------	---------------------------------	---------------

Luminous flux %	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	11500	64.5
95	240	252	10913	61.0
90	227	250	10358	57.7
85	213	248	9759	54.1
80	200	245	9198	50.9
75	187	243	8632	47.7
70	174	240	8062	44.4
65	161	237	7486	41.2
60	148	234	6907	38.0
55	135	231	6320	34.8
50	122	227	5731	31.7
45	110	223	5181	28.8
40	97	219	4584	25.6
35	85	214	4026	22.8
30	73	208	3464	19.9
25	60	201	2854	16.8
20	48	193	2285	13.8
15	36	182	1716	11.0
10	24	168	1140	8.2
5	12	142	564	5.3
2	5	110	226	3.8