
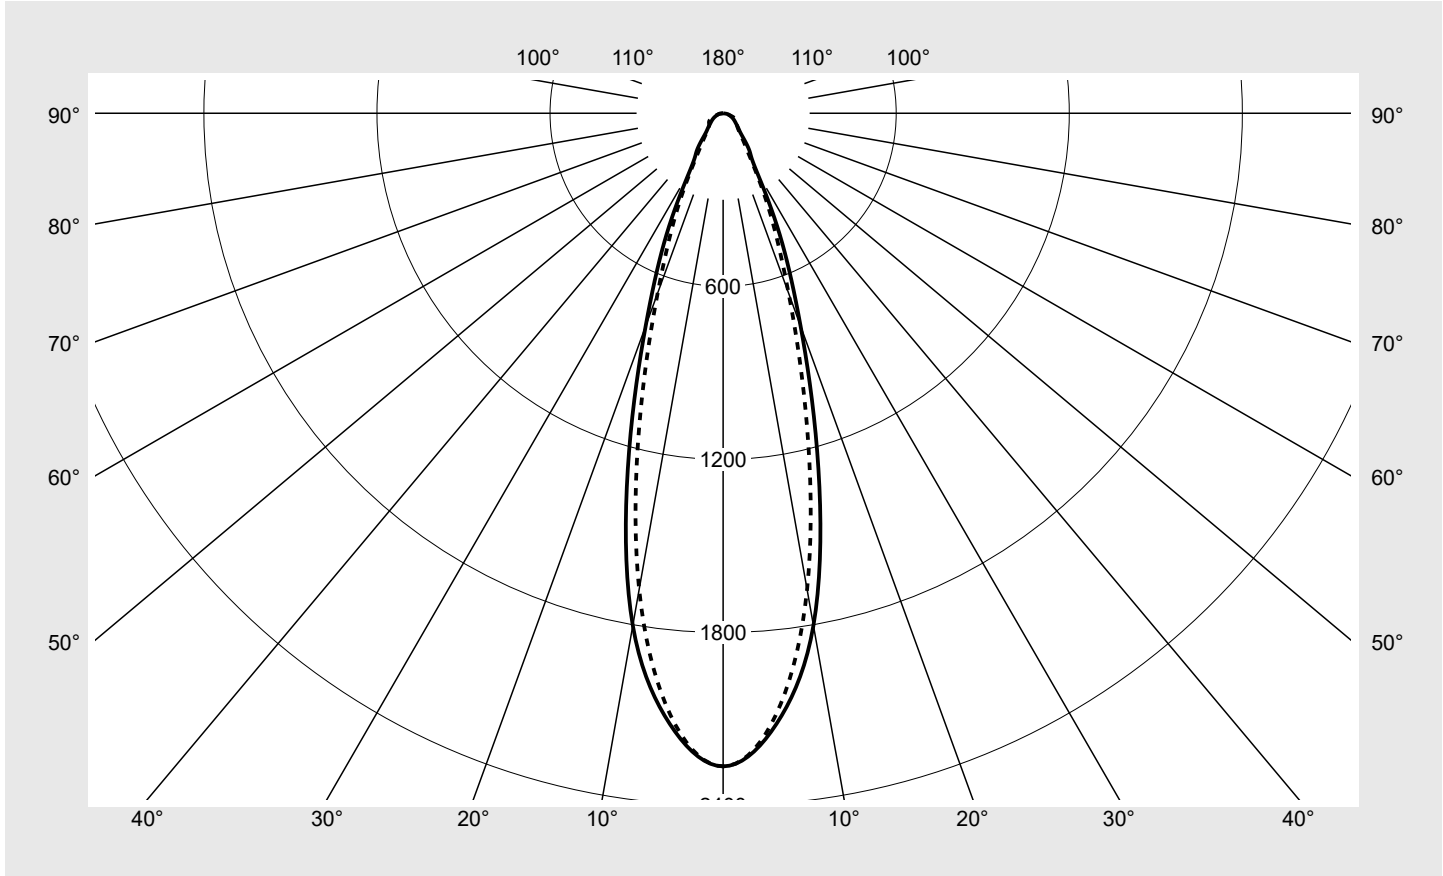


Photometric test report

Family Trunking Flex 31	Order number: 51RF11MB49XG5 EAN: 4069025536624	LP number 59298_110
	Version primary light control with lens, transparent, PMMA, narrow distribution	serial documentation 08.08.2025
	Lamps LED 4000 K CRI ≥ 80 Controlgear ECG Multilumen Rated values Net luminous flux = 9030 lm Power consumption = 50.7 W Luminous efficacy = 178.1 lm/W	



Luminous intensity in cd/klm C180-0 C270-90 I_{max}: 2264 cd/klm



Classifications	
DIN 5040	A 7 1
CIE	N1=83 N2=93 N3=98 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	99.6%
ϕ_o	0.4%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Trunking Flex 31	Order number: 51RF11MB49XG5 EAN: 4069025536624	LP number 59298_110
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes γ	0° 180°	15°	30°	45°	60°	75°	90° 270°	Phi-zone	Total Phi-zone
		165° 195° 345°	150° 210° 330°	135° 225° 315°	120° 240° 300°	105° 255° 285°			
Luminous intensity in cd/klm								Luminous flux in lm/klm	
0°	2264.0	2264.0	2264.0	2264.0	2264.0	2264.0	2264.0	13.5	13.5
5°	2124.6	2117.3	2110.0	2106.4	2102.8	2098.6	2094.4	100.7	114.2
10°	1803.1	1798.4	1793.7	1758.4	1723.0	1699.6	1676.2	166.8	281.0
15°	1276.6	1263.1	1249.6	1218.9	1188.2	1155.9	1123.7	172.0	453.0
20°	785.2	773.2	761.2	738.3	715.4	689.4	663.4	137.5	590.6
25°	464.9	459.0	453.1	430.5	408.0	399.6	391.2	99.5	690.1
30°	231.5	245.6	259.7	243.1	226.4	219.0	211.5	64.6	754.8
35°	159.7	155.6	151.5	146.8	142.0	136.2	130.5	46.0	800.7
40°	102.9	101.3	99.7	98.2	96.6	94.1	91.5	34.5	835.2
45°	75.8	74.7	73.5	74.4	75.2	73.4	71.7	28.7	863.9
50°	60.6	60.0	59.4	61.7	64.1	63.5	63.0	25.9	889.9
55°	50.2	50.1	50.0	53.9	57.9	58.8	59.6	24.4	914.2
60°	41.8	41.5	41.2	46.6	51.9	53.9	55.8	22.5	936.7
65°	33.8	33.4	32.9	37.5	42.1	45.1	48.0	19.2	955.9
70°	26.2	26.2	26.2	27.6	29.0	31.8	34.7	14.7	970.6
75°	20.4	20.2	20.1	21.5	22.8	21.7	20.6	11.2	981.8
80°	14.1	14.0	14.0	15.4	16.8	16.1	15.5	8.2	990.0
85°	7.7	7.7	7.8	9.4	11.0	10.5	10.0	5.0	995.0
90°	1.9	1.9	1.9	3.7	5.5	4.9	4.4	1.9	996.9
95°	0.0	0.0	0.0	1.4	2.7	3.0	3.2	0.8	997.7
100°	0.0	0.0	0.0	1.0	2.1	2.5	2.9	0.6	998.3
105°	0.0	0.0	0.0	1.0	1.9	2.2	2.5	0.6	998.9
110°	0.0	0.0	0.0	0.8	1.6	1.9	2.2	0.5	999.4
115°	0.0	0.0	0.0	0.7	1.3	1.5	1.8	0.4	999.7
120°	0.0	0.0	0.0	0.5	1.1	1.2	1.4	0.3	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Trunking Flex 31	Order number: 51RF11MB49XG5 EAN: 4069025536624	LP number 59298_110
-----------------------------------	---	-------------------------------

UGR-Table	Standard room	siteco	
-----------	---------------	---------------	--

Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	View crosswise (C0)					View endwise (C90)					
x	y										
2H	2H	16.4	17.6	16.8	18.0	18.3	17.6	18.8	17.9	19.1	19.4
	3H	17.6	18.7	18.0	19.1	19.4	19.2	20.3	19.6	20.6	21.0
	4H	18.2	19.2	18.6	19.6	19.9	19.7	20.7	20.1	21.1	21.5
	6H	18.8	19.6	19.2	20.0	20.4	20.3	21.1	20.7	21.5	21.9
	8H	19.0	19.8	19.4	20.2	20.6	20.6	21.3	21.0	21.7	22.1
	12H	19.1	19.8	19.6	20.2	20.7	20.8	21.5	21.3	21.9	22.3
4H	2H	17.1	18.1	17.5	18.5	18.8	18.0	19.0	18.4	19.4	19.8
	3H	18.5	19.3	18.9	19.7	20.1	19.8	20.6	20.2	21.0	21.4
	4H	19.1	19.9	19.6	20.3	20.7	20.5	21.2	20.9	21.6	22.1
	6H	19.8	20.4	20.2	20.8	21.3	21.1	21.8	21.6	22.2	22.7
	8H	20.0	20.6	20.5	21.0	21.5	21.5	22.0	21.9	22.5	23.0
	12H	20.2	20.7	20.7	21.2	21.7	21.8	22.3	22.3	22.7	23.2
8H	4H	19.5	20.1	20.0	20.5	21.0	20.7	21.2	21.2	21.7	22.2
	6H	20.3	20.7	20.7	21.2	21.7	21.5	22.0	22.0	22.4	23.0
	8H	20.6	21.0	21.1	21.5	22.0	21.9	22.4	22.5	22.8	23.4
	12H	20.8	21.2	21.4	21.7	22.2	22.4	22.8	23.0	23.3	23.8
12H	4H	19.6	20.1	20.1	20.5	21.0	20.7	21.2	21.2	21.6	22.1
	6H	20.4	20.8	20.9	21.3	21.8	21.6	22.0	22.1	22.4	23.0
	8H	20.7	21.1	21.3	21.6	22.1	22.1	22.4	22.6	22.9	23.5

Luminance table	Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:		L = 1433	H(C0) = 5	H(C180) = 5
				B = 61	H(C90) = 5	H(C270) = 5

C-planes	γ	Luminance in cd/m ²						
		0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
45°		10234.5	10099.7	10015.1	10247.4	10526.6	10472.4	10433.4
50°		8867.2	8799.2	8783.1	9255.0	9785.3	9919.3	10079.5
55°		8085.6	8089.2	8150.0	8938.2	9806.3	10222.8	10687.9
60°		7567.2	7528.5	7552.5	8706.3	9970.9	10679.2	11467.7
65°		7036.3	6963.0	6959.0	8117.8	9407.3	10464.3	11649.9
70°		6450.7	6486.1	6603.0	7147.5	7802.4	9003.3	10377.9
75°		6229.5	6220.3	6310.5	6990.8	7826.1	7936.5	8112.9
80°		5712.8	5733.6	5880.8	6806.3	7980.1	8419.9	9037.3
85°		4684.4	4788.6	5061.9	6600.5	8681.0	9727.3	11416.3

Photometric test report


Family
Trunking Flex 31

Order number: 51RF11MB49XG5
EAN: 4069025536624

LP number
59298_110

Luminance values in cd/m²

γ 65°
 γ 70°
 γ 75°
 γ 80°
 γ 85°

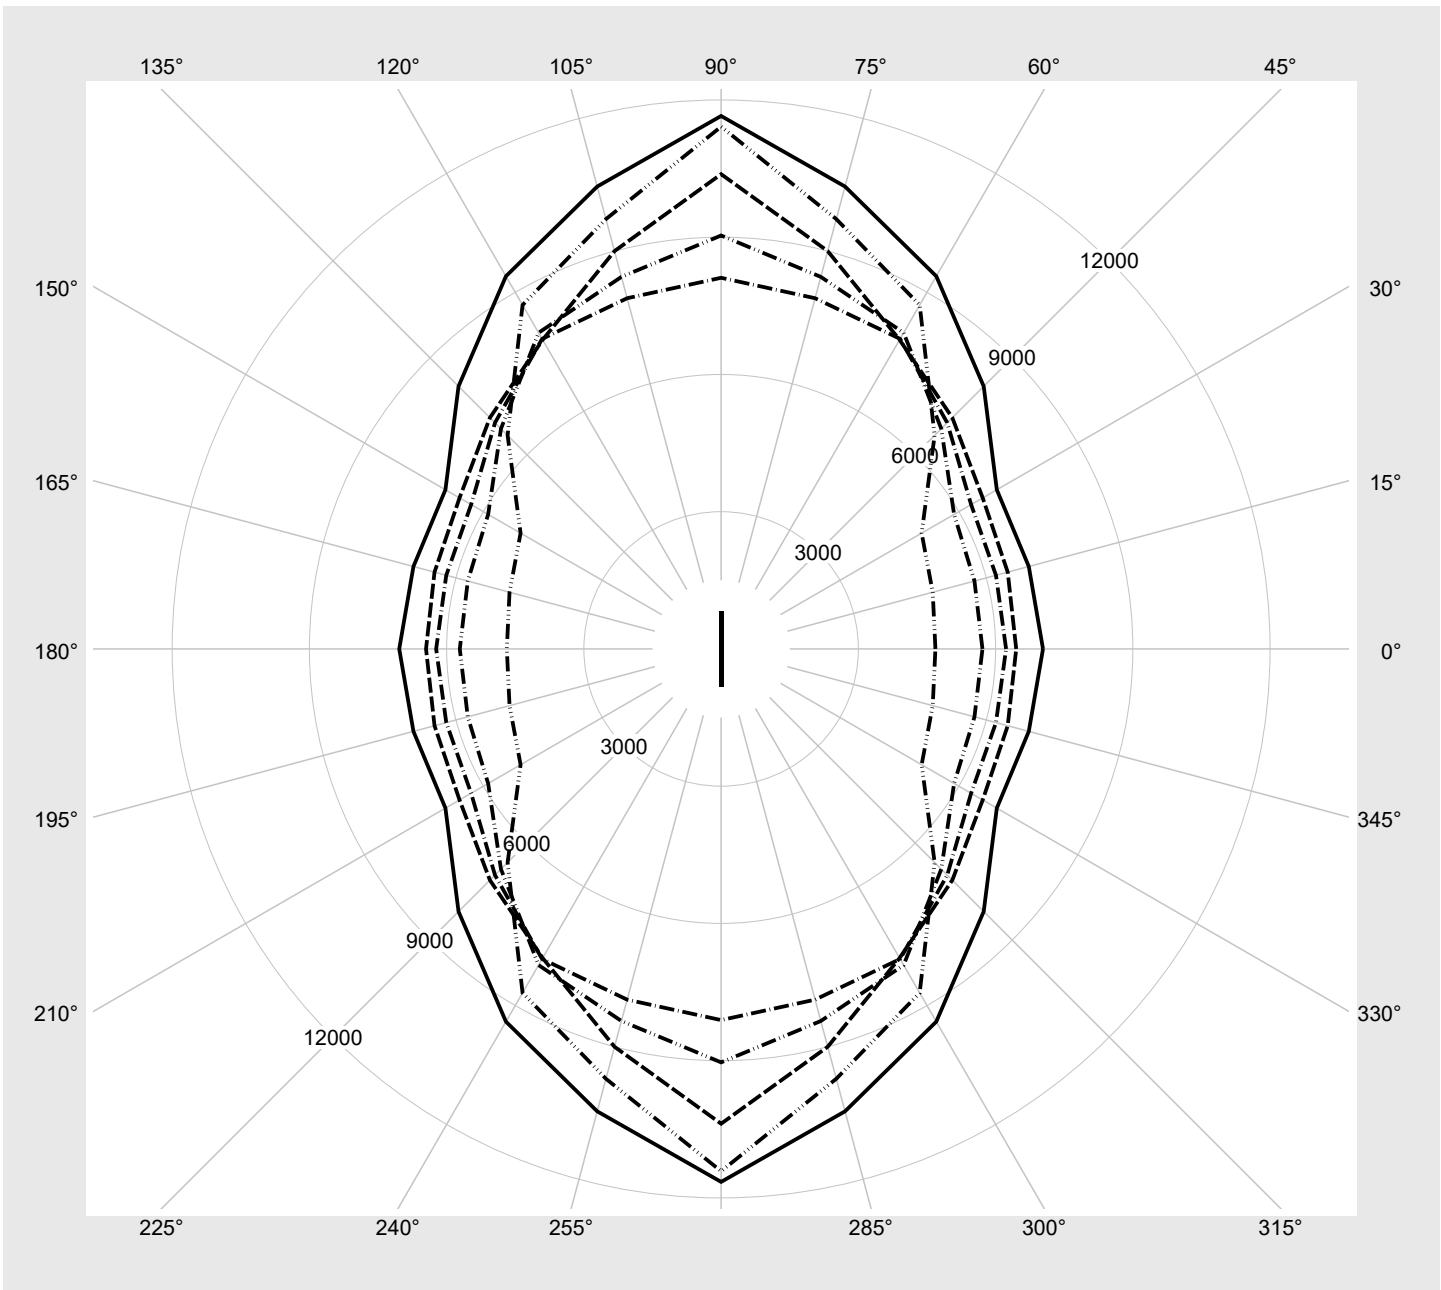

Photometric test report

Family Trunking Flex 31	Order number: 51RF11MB49XG5 EAN: 4069025536624	LP number 59298_110
-----------------------------------	---	-------------------------------

Multilumen Table	environmental temperature: 25°C	sITeco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting				Luminous flux [lm]	Power consumption [W]
	1	2	3	4		
13	ON	ON	OFF	ON	9030	50.7
10	ON	OFF	ON	OFF	7520	42.7
8	ON	OFF	OFF	OFF	6630	37.5
6	OFF	ON	ON	OFF	5700	32.2
4	OFF	ON	OFF	OFF	4780	27.0
2	OFF	OFF	ON	OFF	3850	22.0