Photometric test report

Family
Apollon® 21



Order number: 51MQ12WD2W55
EAN: 4069025336460

LP number
59880_5

serial documentation
30.10.2025

Version	recessed luminaire for lay-in mounting, square M600, wide distribution, UGR≤19 (L65≤3000cd/m²), tunable white
Lamps	LED 2700 K ... 6500 K | CRI ≥ 90
Controlgear	ECG-DALI
Setting	individual position: DIP-Step=7, colour temperature 2700K
Rated values	at 2700 K Net luminous flux = 4580 lm Power consumption = 32.3 W Luminous efficacy = 141.8 lm/W

siteco

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 468 cd/klm**

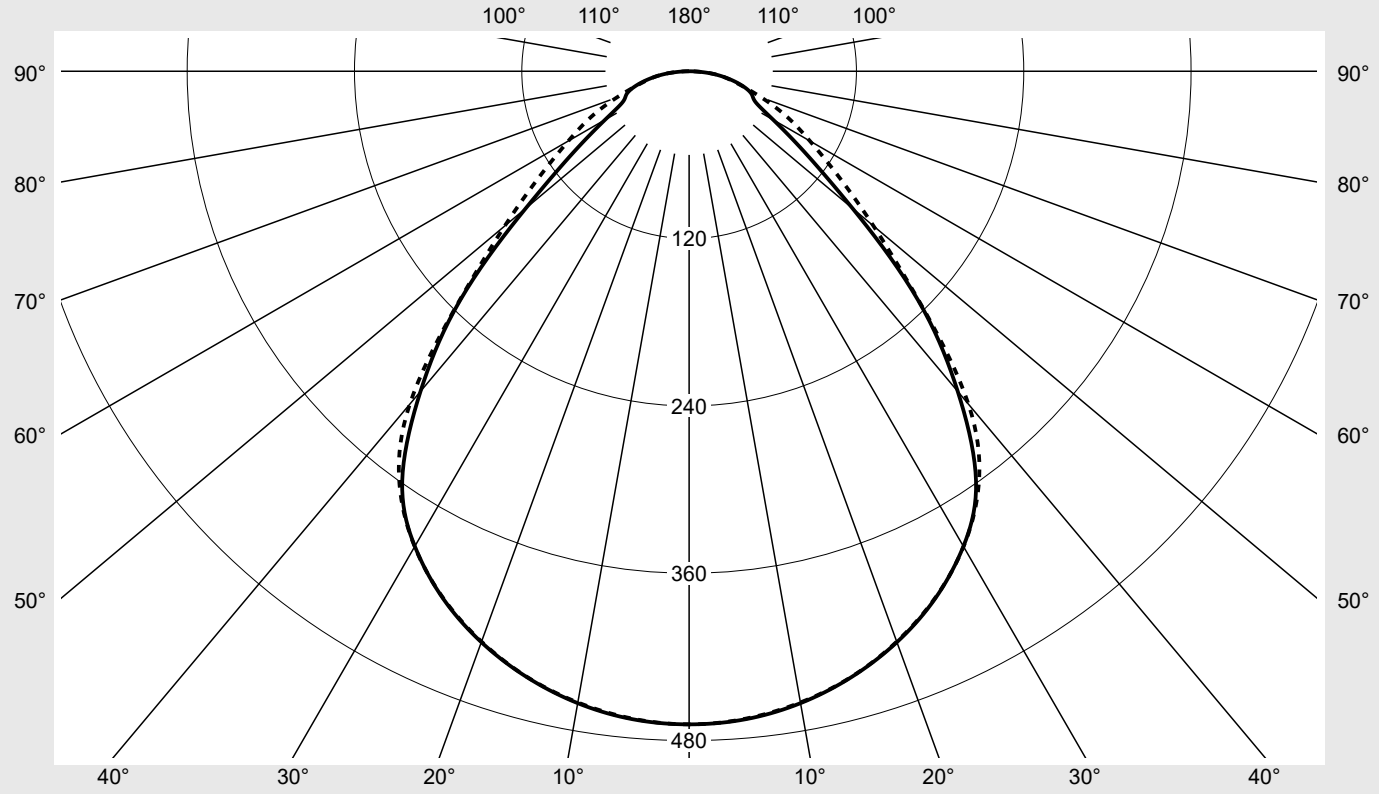

Classifications

DIN 5040	A 5 0
CIE	N1=62 N2=87 N3=97 N4=100 N5=100

Luminaire light output ratios

ηLB	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family	Order number: 51MQ12WD2W55	LP number
Apollon® 21	EAN: 4069025336460	59880_5

siteco

Table of values for luminous intensities

Maximum luminous intensity

C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	468.4	468.4	468.4	468.4	468.4	468.4	468.4	2.8	2.8
5°	466.5	466.3	466.1	466.0	466.0	466.0	466.1	22.3	25.1
10°	460.2	460.0	459.9	459.8	459.7	459.7	459.7	43.8	68.8
15°	449.8	449.8	449.7	449.6	449.6	449.6	449.6	63.8	132.6
20°	435.7	435.8	435.9	435.9	435.7	435.5	435.3	81.7	214.3
25°	417.4	417.4	417.4	417.4	417.3	417.2	417.1	96.7	311.0
30°	393.4	393.3	393.2	393.1	393.3	393.5	393.6	107.8	418.8
35°	358.8	359.3	359.8	360.4	360.9	361.5	362.1	113.3	532.1
40°	299.7	301.2	302.3	304.1	306.3	309.2	311.7	107.4	639.5
45°	232.3	229.8	227.3	224.9	227.7	230.5	233.4	88.7	728.2
50°	153.1	157.3	162.2	165.7	168.7	170.3	172.6	69.1	797.3
55°	101.0	108.0	116.4	121.9	126.1	127.4	130.1	53.5	850.8
60°	69.7	77.3	85.0	92.6	95.1	97.5	100.0	42.1	892.9
65°	52.7	59.7	66.8	73.8	75.1	76.4	77.6	34.5	927.4
70°	47.7	51.1	54.5	57.9	57.1	56.3	55.4	28.2	955.6
75°	39.0	40.4	41.7	43.0	41.3	39.7	38.0	21.6	977.2
80°	27.0	27.5	28.1	28.7	28.0	27.3	26.5	15.0	992.1
85°	13.5	13.6	13.7	13.7	13.9	14.1	14.3	7.5	999.7
90°	0.5	0.6	0.6	0.6	0.6	0.6	0.5	0.3	1000.0
95°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
100°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
105°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
110°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
115°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
120°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
125°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
130°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
135°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
140°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
145°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
150°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
155°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
160°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
165°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
170°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
175°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family	Order number: 51MQ12WD2W55	LP number
Apollon® 21	EAN: 4069025336460	59880_5

siteco

UGR-Table

Standard room

Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	15.5	17.0	15.8	17.3	17.7	16.2	17.7	16.5	18.0	18.4
	3H	16.3	17.7	16.7	18.1	18.4	17.2	18.6	17.6	18.9	19.3
	4H	16.9	18.2	17.3	18.5	18.9	17.6	18.9	18.0	19.3	19.6
	6H	17.4	18.6	17.8	19.0	19.4	18.0	19.2	18.4	19.6	20.0
	8H	17.7	18.8	18.1	19.1	19.6	18.3	19.3	18.7	19.7	20.1
	12H	17.8	18.9	18.3	19.3	19.7	18.4	19.4	18.8	19.8	20.2
4H	2H	16.0	17.3	16.4	17.7	18.0	16.6	17.9	17.0	18.2	18.6
	3H	17.2	18.2	17.6	18.6	19.0	17.8	18.9	18.3	19.3	19.7
	4H	17.9	18.8	18.3	19.2	19.7	18.4	19.4	18.9	19.8	20.2
	6H	18.5	19.4	19.0	19.8	20.3	19.0	19.8	19.4	20.2	20.7
	8H	18.8	19.6	19.3	20.0	20.5	19.2	20.0	19.7	20.4	20.9
	12H	19.0	19.7	19.5	20.2	20.7	19.4	20.1	19.9	20.6	21.1
8H	4H	18.2	19.0	18.7	19.4	19.9	18.7	19.5	19.2	19.9	20.4
	6H	19.0	19.7	19.5	20.2	20.7	19.4	20.0	19.9	20.5	21.0
	8H	19.4	20.0	19.9	20.5	21.0	19.7	20.3	20.2	20.8	21.3
	12H	19.7	20.2	20.3	20.7	21.2	20.1	20.5	20.6	21.0	21.6
12H	4H	18.3	19.0	18.8	19.4	19.9	18.8	19.4	19.2	19.9	20.4
	6H	19.2	19.7	19.7	20.2	20.7	19.5	20.1	20.0	20.5	21.1
	8H	19.6	20.0	20.1	20.5	21.1	19.9	20.4	20.4	20.9	21.4

Luminance table

Max. for $\gamma >= 65°$

Photometric dimensions in mm: L = 552, B = 552

C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	4937.4	4884.9	4832.5	4780.0	4840.4	4900.7	4961.1
50°	3579.0	3677.9	3791.7	3875.5	3944.3	3983.1	4036.8
55°	2646.8	2829.5	3049.2	3194.9	3303.7	3338.5	3410.2
60°	2094.4	2324.3	2554.0	2783.9	2858.1	2932.2	3006.4
65°	1874.8	2124.7	2374.6	2624.4	2670.0	2715.6	2761.2
70°	2094.1	2244.4	2394.6	2544.8	2508.7	2472.6	2436.5
75°	2267.2	2343.4	2419.6	2495.8	2399.8	2303.7	2207.7
80°	2334.4	2383.6	2432.8	2481.9	2420.5	2359.0	2297.6
85°	2335.3	2345.1	2355.1	2365.0	2398.8	2432.7	2466.5

Photometric test report

Family	Order number: 51MQ12WD2W55	LP number
Apollon® 21	**EAN: 4069025336460**	**59880_5**

Luminance values in cd/m²

γ 65° γ 70° γ 75° γ 80° γ 85°

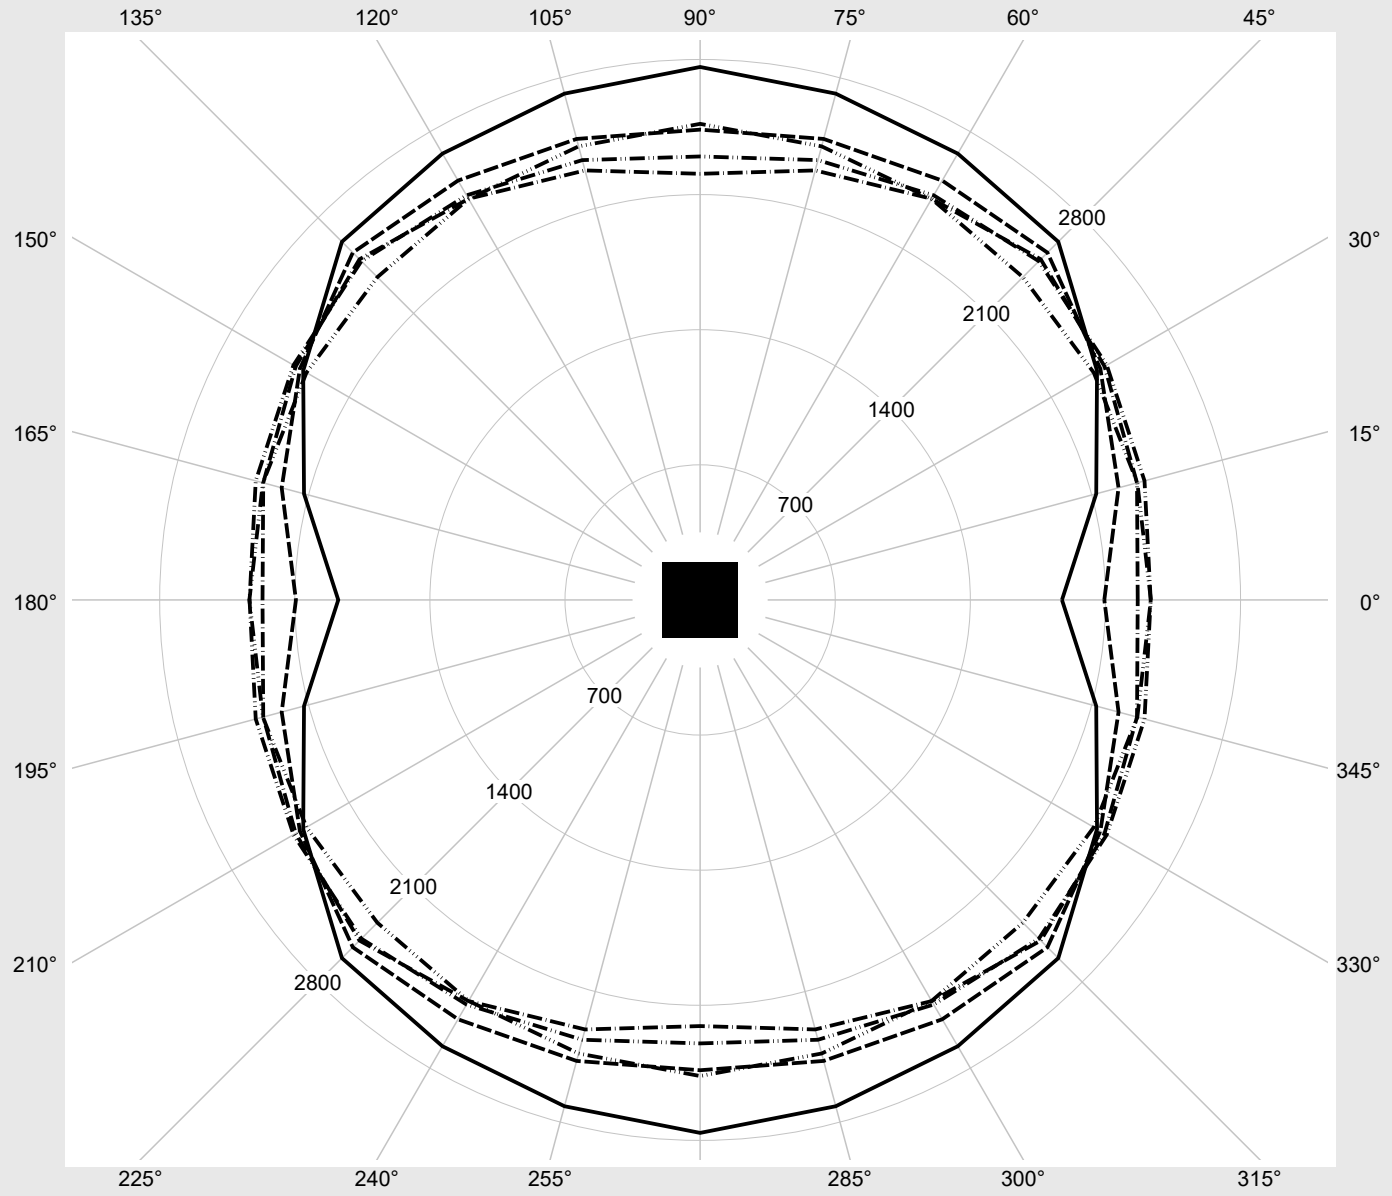

Photometric test report

Family	Order number: 51MQ12WD2W55	LP number
Apollon® 21	**EAN: 4069025336460**	**59880_5**

siteco

Multilumen Table

environmental temperature: 25°C

DIP-Step	Switch Setting 1	2	3	4	Luminous flux [lm]	Power consumption [W]
0	OFF	OFF	OFF	OFF	5600	39.9
1	ON	OFF	OFF	OFF	5330	37.9
2	OFF	ON	OFF	OFF	5070	35.9
4	OFF	OFF	ON	OFF	4850	34.3
7	ON	ON	ON	OFF	4580	32.3
8	OFF	OFF	OFF	ON	4300	30.3
10	OFF	ON	OFF	ON	4030	28.3
12	OFF	OFF	ON	ON	3750	26.3
13	ON	OFF	ON	ON	3470	24.3
14	OFF	ON	ON	ON	3190	22.3