




Photometric test report

Family Licross® 11 Recessed	Order number: 51TL14CN485G EAN: 4058352929728	LP number 58683_373
	Version cover frosted, asymmetric distribution Lamps LED 4000 K CRI ≥ 80 Controlgear ECG-Multilumen CLOi Rated values Net luminous flux = 8570 lm Power consumption = 49.3 W Luminous efficacy = 173.8 lm/W	serial documentation 14.11.2025
		

Luminous intensity in cd/klm C180-0 C270-90 **Imax: 681 cd/klm**

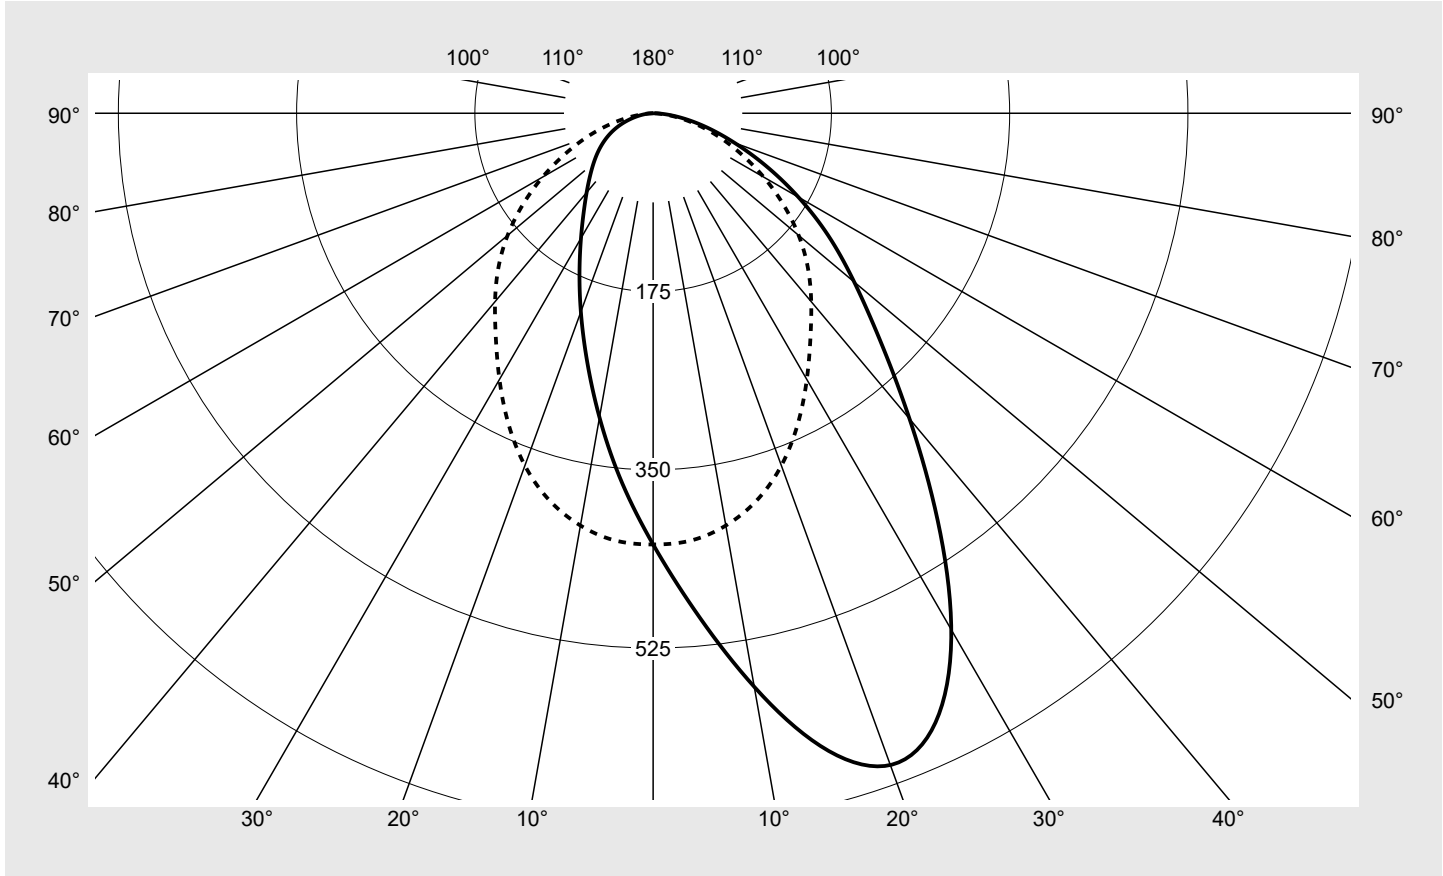

Classifications	
DIN 5040	A 4 0
CIE	N1=56 N2=84 N3=97 N4=100 N5=100

Luminaire light output ratios	
η_{LB}	100.0%
ϕ_u	100.0%
ϕ_o	0.0%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL14CN485G EAN: 4058352929728	LP number 58683_373
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°
γ	Luminous intensity in cd/klm						
0°	423.3	423.3	423.3	423.3	423.3	423.3	423.3
5°	492.9	491.4	480.7	469.8	456.1	438.7	421.2
10°	571.7	566.6	544.9	518.0	484.6	447.0	411.0
15°	644.7	637.1	605.9	562.5	507.2	447.4	393.4
20°	680.9	674.8	644.8	594.0	519.7	438.2	368.1
25°	657.9	657.6	642.1	600.0	518.2	419.3	336.2
30°	585.4	591.2	594.0	574.0	501.7	394.4	301.7
35°	486.6	496.5	513.6	518.9	472.6	367.8	269.2
40°	391.6	400.9	423.7	447.6	435.3	342.4	241.4
45°	315.0	320.7	340.1	373.0	389.0	312.9	214.9
50°	257.7	259.4	273.6	305.9	334.9	275.1	186.5
55°	210.4	209.0	219.8	247.0	276.4	230.5	156.0
60°	164.7	163.2	172.4	194.6	218.3	183.7	125.4
65°	122.2	121.6	130.0	147.7	165.1	139.3	96.1
70°	85.2	85.7	92.4	106.6	118.3	100.1	70.2
75°	55.7	56.1	61.0	71.1	77.9	65.9	46.5
80°	31.6	31.9	35.4	40.3	43.4	36.3	25.7
85°	13.1	12.9	14.6	16.5	16.2	13.2	9.1
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0

C-planes	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm						Luminous flux in lm/klm	
0°	423.3	423.3	423.3	423.3	423.3	423.3	2.5	2.5
5°	404.2	389.5	375.7	365.6	362.1	361.8	20.2	22.8
10°	378.5	351.6	328.9	312.6	305.3	303.2	40.3	63.1
15°	347.6	311.7	283.3	263.5	254.2	251.1	59.8	123.0
20°	312.8	271.7	241.2	220.7	211.0	207.4	77.2	200.1
25°	275.0	232.7	202.9	183.7	174.4	171.0	89.9	290.0
30°	237.7	196.9	169.7	152.6	144.6	141.7	96.4	386.5
35°	204.1	165.0	141.0	127.0	121.0	118.9	96.9	483.4
40°	176.0	138.8	117.2	106.8	102.8	101.6	93.4	576.7
45°	151.3	116.9	98.0	90.5	88.3	87.8	87.1	663.9
50°	128.6	98.3	82.7	77.4	76.2	76.3	79.3	743.1
55°	107.1	82.4	69.7	65.9	65.5	66.0	69.9	813.0
60°	87.0	68.0	58.3	55.3	55.4	56.0	59.0	872.0
65°	68.6	55.0	47.7	45.3	45.4	45.9	47.4	919.5
70°	51.6	42.4	37.2	35.1	35.2	35.4	35.8	955.3
75°	35.3	29.8	26.5	24.5	24.4	24.5	24.7	980.0
80°	20.2	17.6	15.6	14.5	14.4	14.5	14.3	994.3
85°	7.8	7.1	6.7	6.2	6.2	6.3	5.7	1000.0
90°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0
180°	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1000.0

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL14CN485G EAN: 4058352929728	LP number 58683_373
---------------------------------------	----------------------------------------------------------------	-------------------------------

UGR-Table		Standard room									
		View crosswise (C0)					View endwise (C90)				
Room dimensions											
x	y										
2H	2H	25.9	27.5	26.2	27.8	28.1	24.5	26.1	24.8	26.4	26.7
	3H	26.8	28.3	27.2	28.6	29.0	25.6	27.0	26.0	27.4	27.7
	4H	27.2	28.5	27.6	28.9	29.3	26.0	27.3	26.4	27.7	28.1
	6H	27.4	28.7	27.8	29.1	29.4	26.3	27.5	26.7	27.9	28.3
	8H	27.5	28.7	27.9	29.1	29.5	26.3	27.5	26.8	27.9	28.3
	12H	27.6	28.7	28.0	29.1	29.5	26.4	27.5	26.9	27.9	28.3
4H	2H	26.6	28.0	27.0	28.3	28.7	25.1	26.4	25.5	26.8	27.1
	3H	27.7	28.9	28.2	29.3	29.7	26.5	27.6	26.9	28.0	28.4
	4H	28.2	29.2	28.6	29.6	30.0	27.0	28.0	27.5	28.5	28.9
	6H	28.5	29.4	29.0	29.8	30.3	27.4	28.3	27.9	28.7	29.2
	8H	28.6	29.4	29.1	29.9	30.4	27.5	28.3	28.0	28.8	29.2
	12H	28.7	29.4	29.2	29.9	30.4	27.6	28.3	28.1	28.8	29.2
8H	4H	28.5	29.3	29.0	29.8	30.2	27.3	28.1	27.7	28.5	29.0
	6H	28.9	29.6	29.4	30.1	30.6	27.8	28.4	28.3	28.9	29.4
	8H	29.1	29.7	29.6	30.2	30.7	27.9	28.5	28.4	29.0	29.5
	12H	29.2	29.7	29.7	30.2	30.7	28.1	28.5	28.6	29.0	29.6
12H	4H	28.6	29.3	29.1	29.7	30.2	27.3	28.0	27.8	28.5	29.0
	6H	29.0	29.6	29.5	30.1	30.6	27.8	28.4	28.3	28.9	29.4
	8H	29.2	29.7	29.7	30.2	30.7	28.0	28.5	28.5	29.0	29.6

Luminance table		Max. for $\gamma \geq 65^\circ$											
		Photometric dimensions in mm: L = 1500 B = 58											
C-planes	0°	15° 345°	30° 330°	45° 315°	60° 300°	75° 285°	90° 270°	105° 255°	120° 240°	135° 225°	150° 210°	165° 195°	180°
γ	Luminance in cd/m ²												
45°	43876.9	44669.9	47383.4	51965.0	54185.3	43595.0	29938.4	21083.7	16282.1	13645.9	12611.6	12304.0	12225.5
50°	39486.1	39747.9	41928.6	46871.6	51330.0	42151.6	28582.4	19713.9	15070.4	12667.8	11854.6	11683.0	11694.6
55°	36126.1	35898.0	37744.6	42415.2	47476.7	39580.3	26785.0	18399.8	14147.4	11969.7	11322.3	11250.7	11341.9
60°	32446.0	32159.6	33966.2	38339.6	43012.1	36184.1	24696.0	17133.9	13392.1	11478.3	10903.8	10907.5	11039.7
65°	28480.6	28333.3	30293.8	34421.4	38475.5	32461.0	22404.3	15987.3	12829.7	11112.1	10563.9	10579.9	10708.4
70°	24532.5	24694.7	26618.3	30711.2	34062.8	28835.1	20217.3	14856.5	12206.2	10723.5	10095.1	10135.1	10182.4
75°	21206.5	21351.1	23202.0	27053.6	29645.8	25089.3	17713.7	13438.9	11359.3	10069.1	9308.3	9286.6	9310.5
80°	17953.0	18110.7	20066.1	22879.2	24594.1	20586.3	14594.8	11466.3	9988.5	8840.4	8248.1	8190.8	8237.4
85°	14796.9	14631.9	16455.0	18606.9	18292.7	14889.6	10322.4	8828.2	8056.3	7519.4	7062.8	7026.6	7091.0


Photometric test report

Family Licross® 11 Recessed	Order number: 51TL14CN485G EAN: 4058352929728	LP number 58683_373
----------------------------------------------	----------------------------------------------------------------	--------------------------------------

Luminance values in cd/m²

γ 65°
γ 70°
γ 75°
γ 80°
γ 85°

siteco

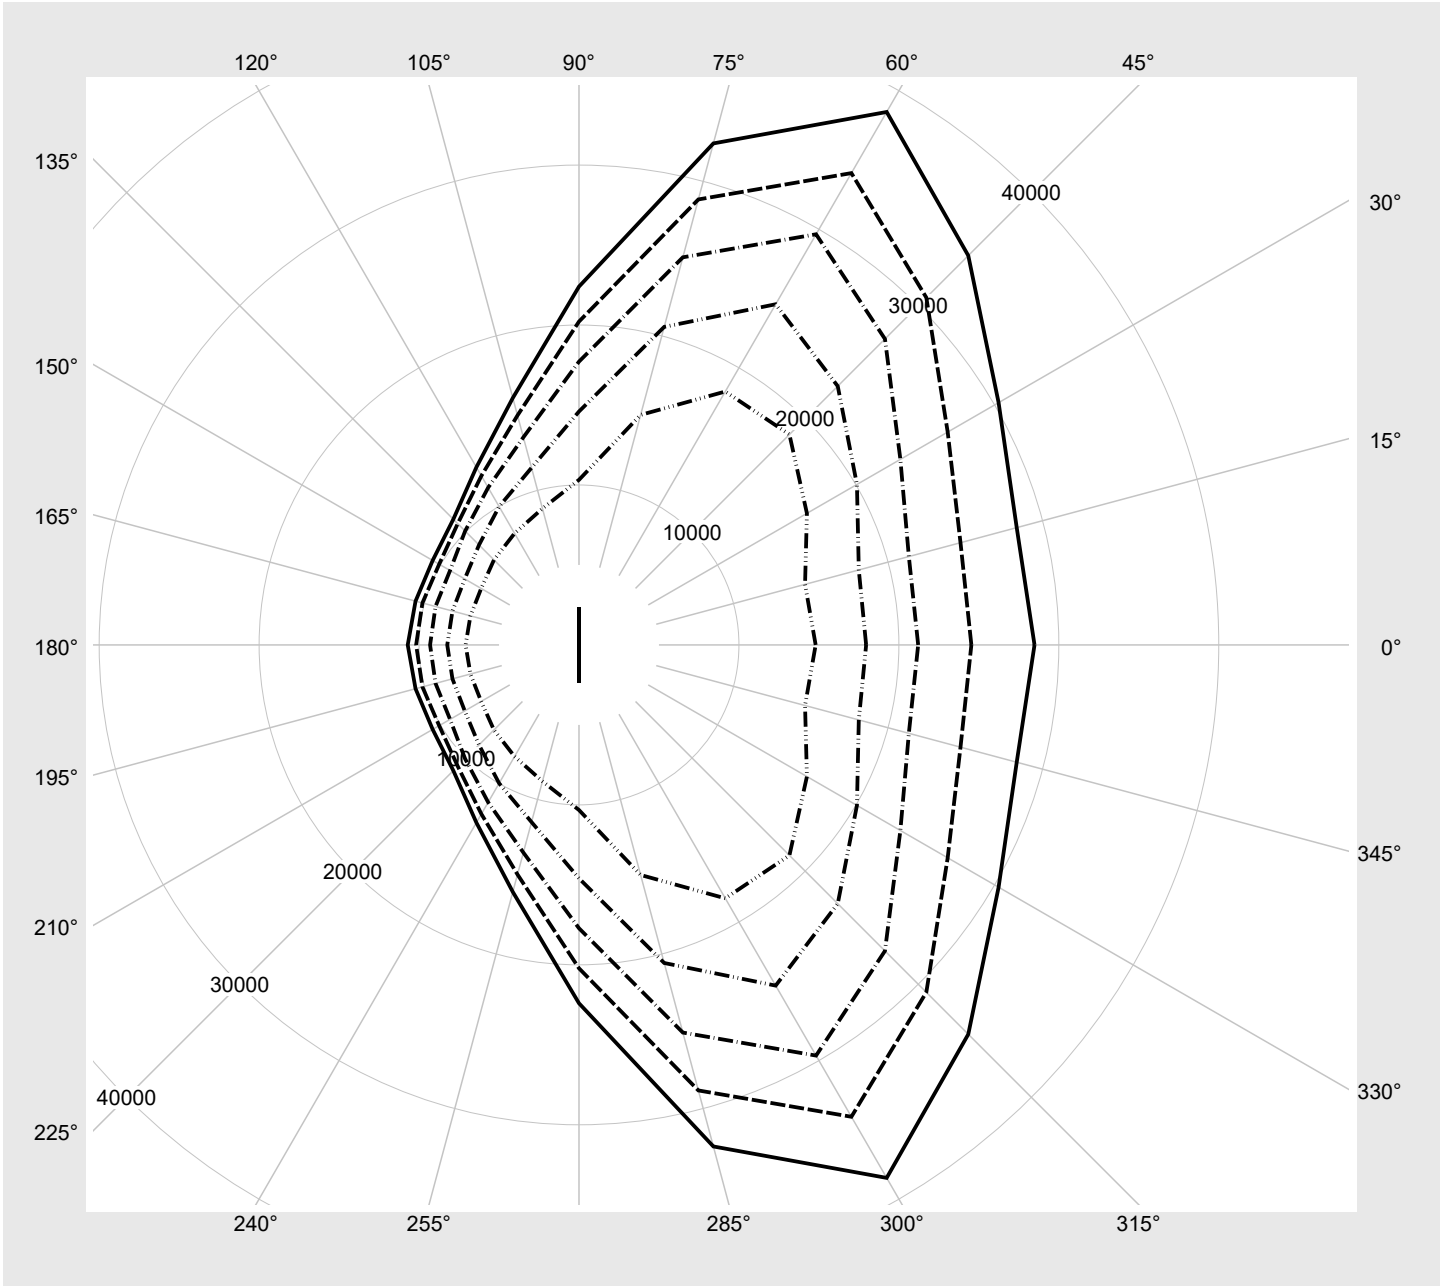

Photometric test report

Family Licross® 11 Recessed	Order number: 51TL14CN485G EAN: 4058352929728	LP number 58683_373
---------------------------------------	----------------------------------------------------------------	--------------------------------------

Multilumen Table	environmental temperature: 25°C	siteco
-------------------------	---------------------------------	---------------

DIP-Step	Switch Setting			Luminous flux [lm]	Power consumption [W]	Power consumption	Power consumption
	1	2	3			end of lifetime [W]	average [W]
1	A	C	E	8570	49.3	52.0	50.6
2	A	C	F	8080	46.2	48.4	47.3
3	A	D	E	7590	43.1	45.3	44.2
4	A	D	F	7080	40.0	42.2	41.1
5	B	C	E	6650	37.4	39.6	38.5
6	B	C	F	6140	34.3	36.5	35.4
7	B	D	E	5700	31.8	33.5	32.6
8	B	D	F	5250	29.2	30.9	30.0