

Photometric test report

Family
Silica® 21 round S

Order number: 51ME21DA3NSA
EAN: 4069025800145

LP number
60073_38

serial
documentation
20.05.2026



Version surface-mounted luminaire, housing, silver, cover, opal, direct extremely wide distribution with ceiling illumination, UGR≤22

Lamps LED 3000 K | CRI ≥ 80

Controlgear ECG-DALI


Rated values Net luminous flux = 2250 lm
Power consumption = 17.2 W
Luminous efficacy = 130.8 lm/W

siteco

Luminous intensity in cd/klm

C180-0

Imax: 362 cd/klm

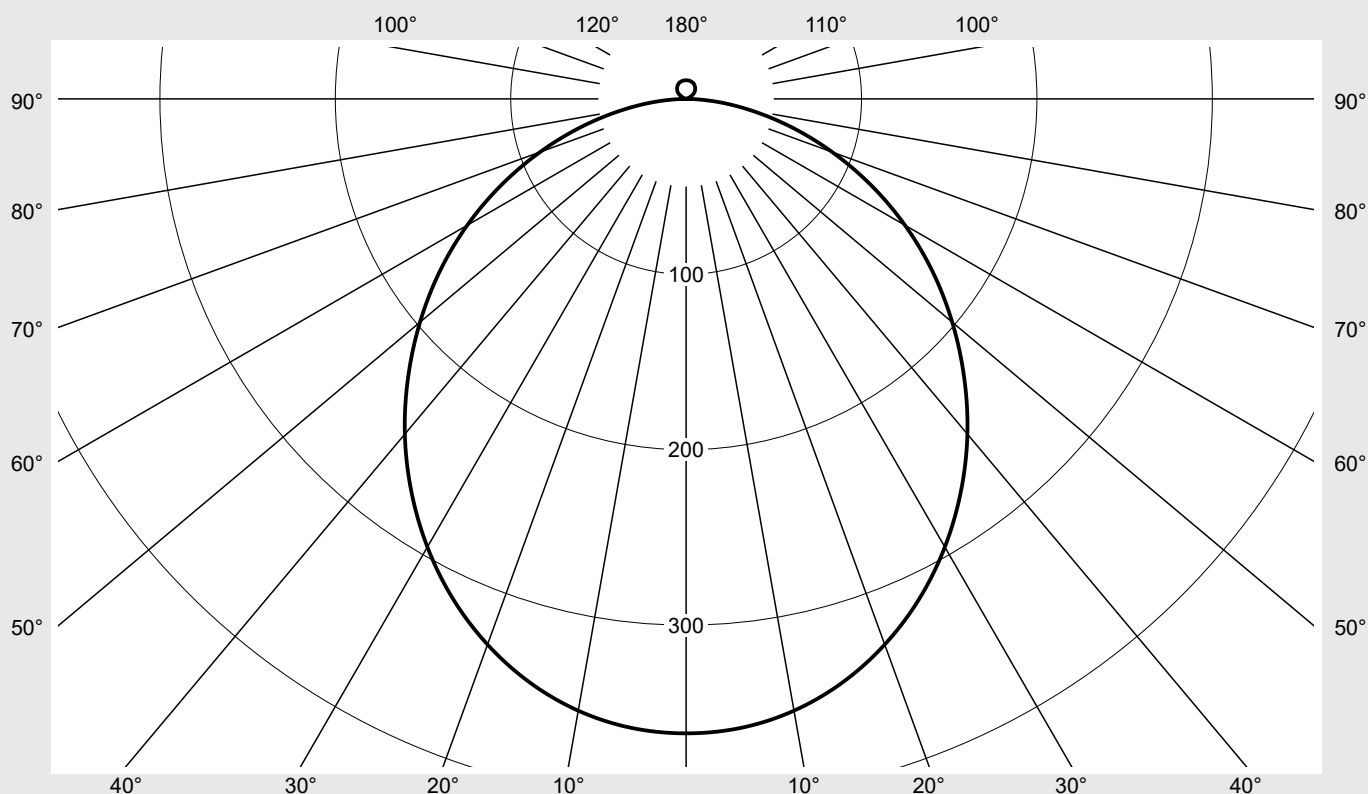

Classifications

DIN 5040 A 4 3
CIE N1=49 N2=79 N3=96
N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 97.2%
 ϕ_o 2.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round S	Order number: 51ME21DA3NSA EAN: 4069025800145	LP number 60073_38
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	361.7	2.2	2.2
5°	359.9	17.2	19.4
10°	354.2	33.7	53.1
15°	344.4	48.9	101.9
20°	331.1	62.1	164.0
25°	314.5	72.9	236.9
30°	295.0	80.9	317.7
35°	273.1	85.9	403.6
40°	249.5	87.9	491.5
45°	224.1	86.9	578.4
50°	198.0	83.2	661.5
55°	171.5	77.0	738.5
60°	144.1	68.4	806.9
65°	116.3	57.8	864.7
70°	88.6	45.6	910.3
75°	62.0	32.8	943.1
80°	37.4	20.2	963.3
85°	16.0	8.7	972.1
90°	0.1	0.0	972.1
95°	0.2	0.1	972.2
100°	0.5	0.3	972.5
105°	1.0	0.5	973.0
110°	1.6	0.8	973.8
115°	2.4	1.2	975.0
120°	3.8	1.8	976.8
125°	5.3	2.4	979.2
130°	6.4	2.7	981.9
135°	7.2	2.8	984.7
140°	8.0	2.8	987.5
145°	8.7	2.7	990.2
150°	9.3	2.6	992.8
155°	9.8	2.3	995.1
160°	10.1	1.9	997.0
165°	10.3	1.5	998.4
170°	10.5	1.0	999.4
175°	10.6	0.5	999.9
180°	10.6	0.1	1000.0

Photometric test report

Family Silica® 21 round S			Order number: 51ME21DA3NSA EAN: 4069025800145							LP number 60073_38	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7
	3H	19.9	21.5	20.3	21.8	22.1	19.9	21.5	20.3	21.8	22.1
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7
	6H	21.1	22.4	21.5	22.7	23.1	21.1	22.4	21.5	22.7	23.1
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3
4H	2H	19.1	20.5	19.5	20.9	21.3	19.1	20.5	19.5	20.9	21.3
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1
	8H	22.4	23.3	22.9	23.7	24.2	22.4	23.3	22.9	23.7	24.2
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
8H	4H	22.0	22.8	22.4	23.3	23.7	22.0	22.8	22.4	23.3	23.7
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8
12H	4H	22.0	22.8	22.5	23.2	23.7	22.0	22.8	22.5	23.2	23.7
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 386
C-planes		0°		
γ	Luminance in cd/m²			
45°	6094.0			
50°	5923.9			
55°	5747.9			
60°	5541.0			
65°	5289.7			
70°	4980.4			
75°	4609.2			
80°	4136.9			
85°	3533.7			

Photometric test report

Family
Silica® 21 round S

Order number: 51ME21DA3NSA
EAN: 4069025800145

LP number
60073_38

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

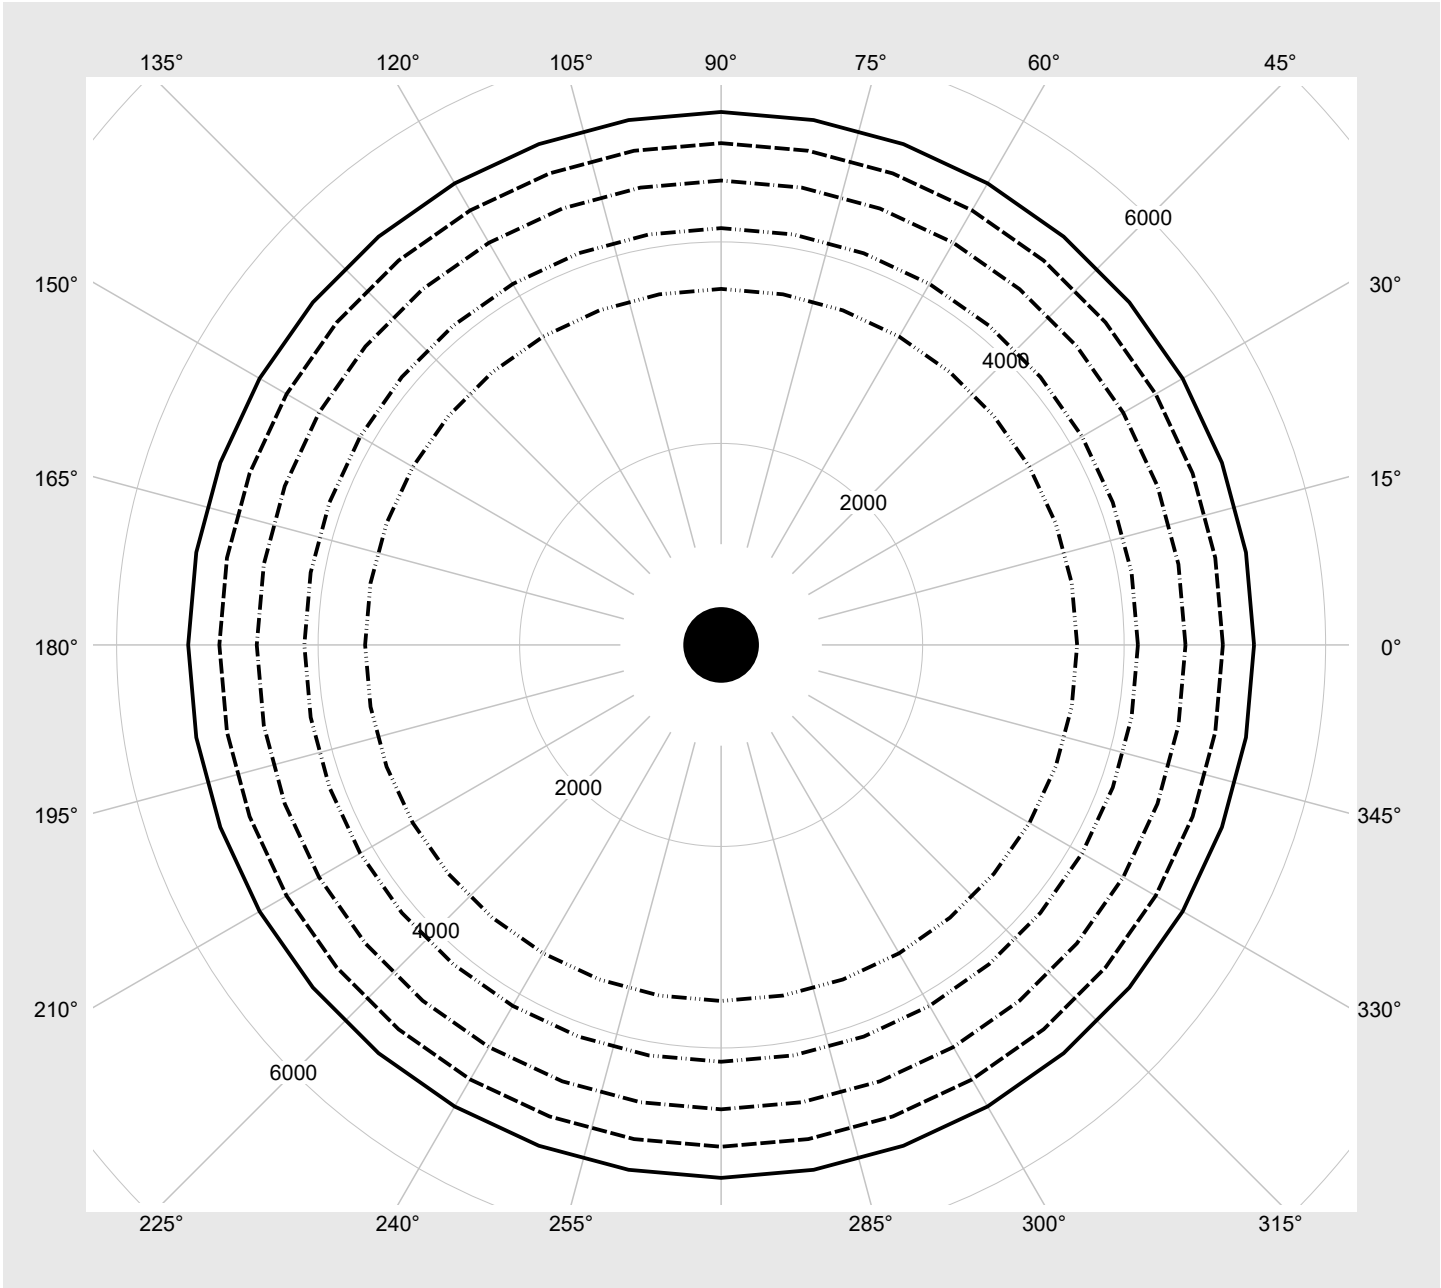

Photometric test report

Family Silica® 21 round S	Order number: 51ME21DA3NSA EAN: 4069025800145	LP number 60073_38
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	2250	17.2
95	241	252	2136	16.4
90	228	250	2021	15.5
85	216	248	1915	14.7
80	203	246	1801	13.8
75	190	243	1685	13.1
70	178	241	1579	12.3
65	165	238	1463	11.5
60	152	235	1347	10.7
55	140	232	1240	10.0
50	127	229	1125	9.1
45	114	225	1008	8.3
40	102	221	901	7.5
35	89	216	784	6.7
30	77	210	677	5.9
25	64	204	560	5.0
20	52	196	451	4.2
15	39	185	334	3.4
10	27	172	226	2.5
5	15	150	116	1.5
4	12	142	89	1.2