

Photometric test report

Family
Silica® 21 round S

Order number: 51ME21DA3NWA
EAN: 4069025800169

LP number
60073_2

serial
documentation
20.05.2026

siteco

Version surface-mounted luminaire, housing, white, cover, opal, direct extremely wide distribution with ceiling illumination, UGR≤22

Lamps LED 3000 K | CRI ≥ 80


Controlgear ECG-DALI

Rated values Net luminous flux = 2250 lm
Power consumption = 16.1 W
Luminous efficacy = 139.8 lm/W

Luminous intensity in cd/klm

C180-0

Imax: 362 cd/klm

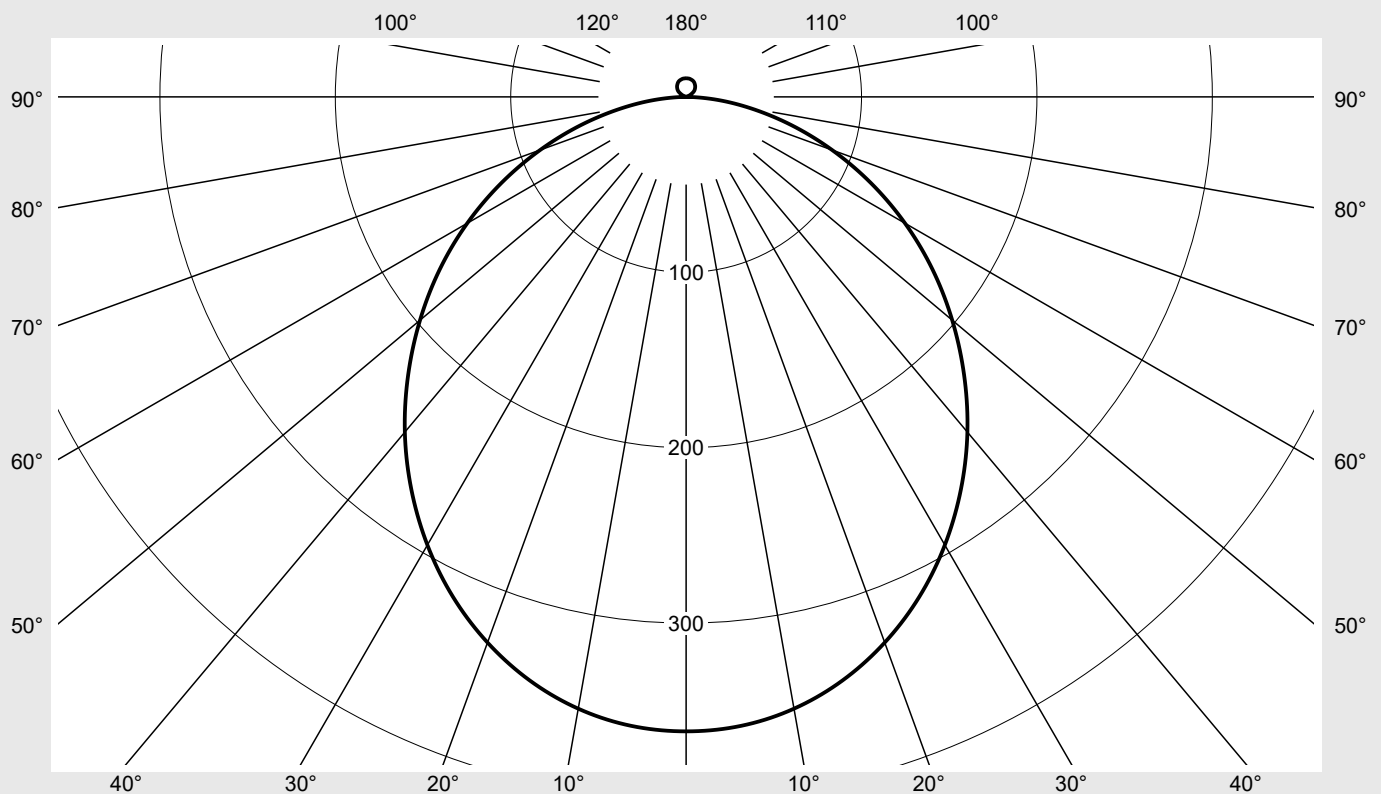

Classifications

DIN 5040 A 4 3
CIE N1=49 N2=79 N3=96
N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 97.2%
 ϕ_o 2.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round S	Order number: 51ME21DA3NWA EAN: 4069025800169	LP number 60073_2
Table of values for luminous intensities		Maximum luminous intensity

siteco

C-planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	361.7	2.2	2.2
5°	359.9	17.2	19.4
10°	354.2	33.7	53.1
15°	344.4	48.9	101.9
20°	331.1	62.1	164.0
25°	314.5	72.9	236.9
30°	295.0	80.9	317.7
35°	273.1	85.9	403.6
40°	249.5	87.9	491.5
45°	224.1	86.9	578.4
50°	198.0	83.2	661.5
55°	171.5	77.0	738.5
60°	144.1	68.4	806.9
65°	116.3	57.8	864.7
70°	88.6	45.6	910.3
75°	62.0	32.8	943.1
80°	37.4	20.2	963.3
85°	16.0	8.7	972.1
90°	0.1	0.0	972.1
95°	0.2	0.1	972.2
100°	0.5	0.3	972.5
105°	1.0	0.5	973.0
110°	1.6	0.8	973.8
115°	2.4	1.2	975.0
120°	3.8	1.8	976.8
125°	5.3	2.4	979.2
130°	6.4	2.7	981.9
135°	7.2	2.8	984.7
140°	8.0	2.8	987.5
145°	8.7	2.7	990.2
150°	9.3	2.6	992.8
155°	9.8	2.3	995.1
160°	10.1	1.9	997.0
165°	10.3	1.5	998.4
170°	10.5	1.0	999.4
175°	10.6	0.5	999.9
180°	10.6	0.1	1000.0

Photometric test report

Family Silica® 21 round S			Order number: 51ME21DA3NWA EAN: 4069025800169							LP number 60073_2	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7
	3H	19.9	21.5	20.3	21.8	22.1	19.9	21.5	20.3	21.8	22.1
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7
	6H	21.1	22.4	21.5	22.7	23.1	21.1	22.4	21.5	22.7	23.1
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3
4H	2H	19.1	20.5	19.5	20.9	21.3	19.1	20.5	19.5	20.9	21.3
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1
	8H	22.4	23.3	22.9	23.7	24.2	22.4	23.3	22.9	23.7	24.2
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
8H	4H	22.0	22.8	22.4	23.3	23.7	22.0	22.8	22.4	23.3	23.7
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8
12H	4H	22.0	22.8	22.5	23.2	23.7	22.0	22.8	22.5	23.2	23.7
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm:	D = 386
C-planes		0°		
γ	Luminance in cd/m²			
45°	6094.0			
50°	5923.9			
55°	5747.9			
60°	5541.0			
65°	5289.7			
70°	4980.4			
75°	4609.2			
80°	4136.9			
85°	3533.7			

Photometric test report

Family
Silica® 21 round S

Order number: 51ME21DA3NWA
EAN: 4069025800169

LP number
60073_2

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

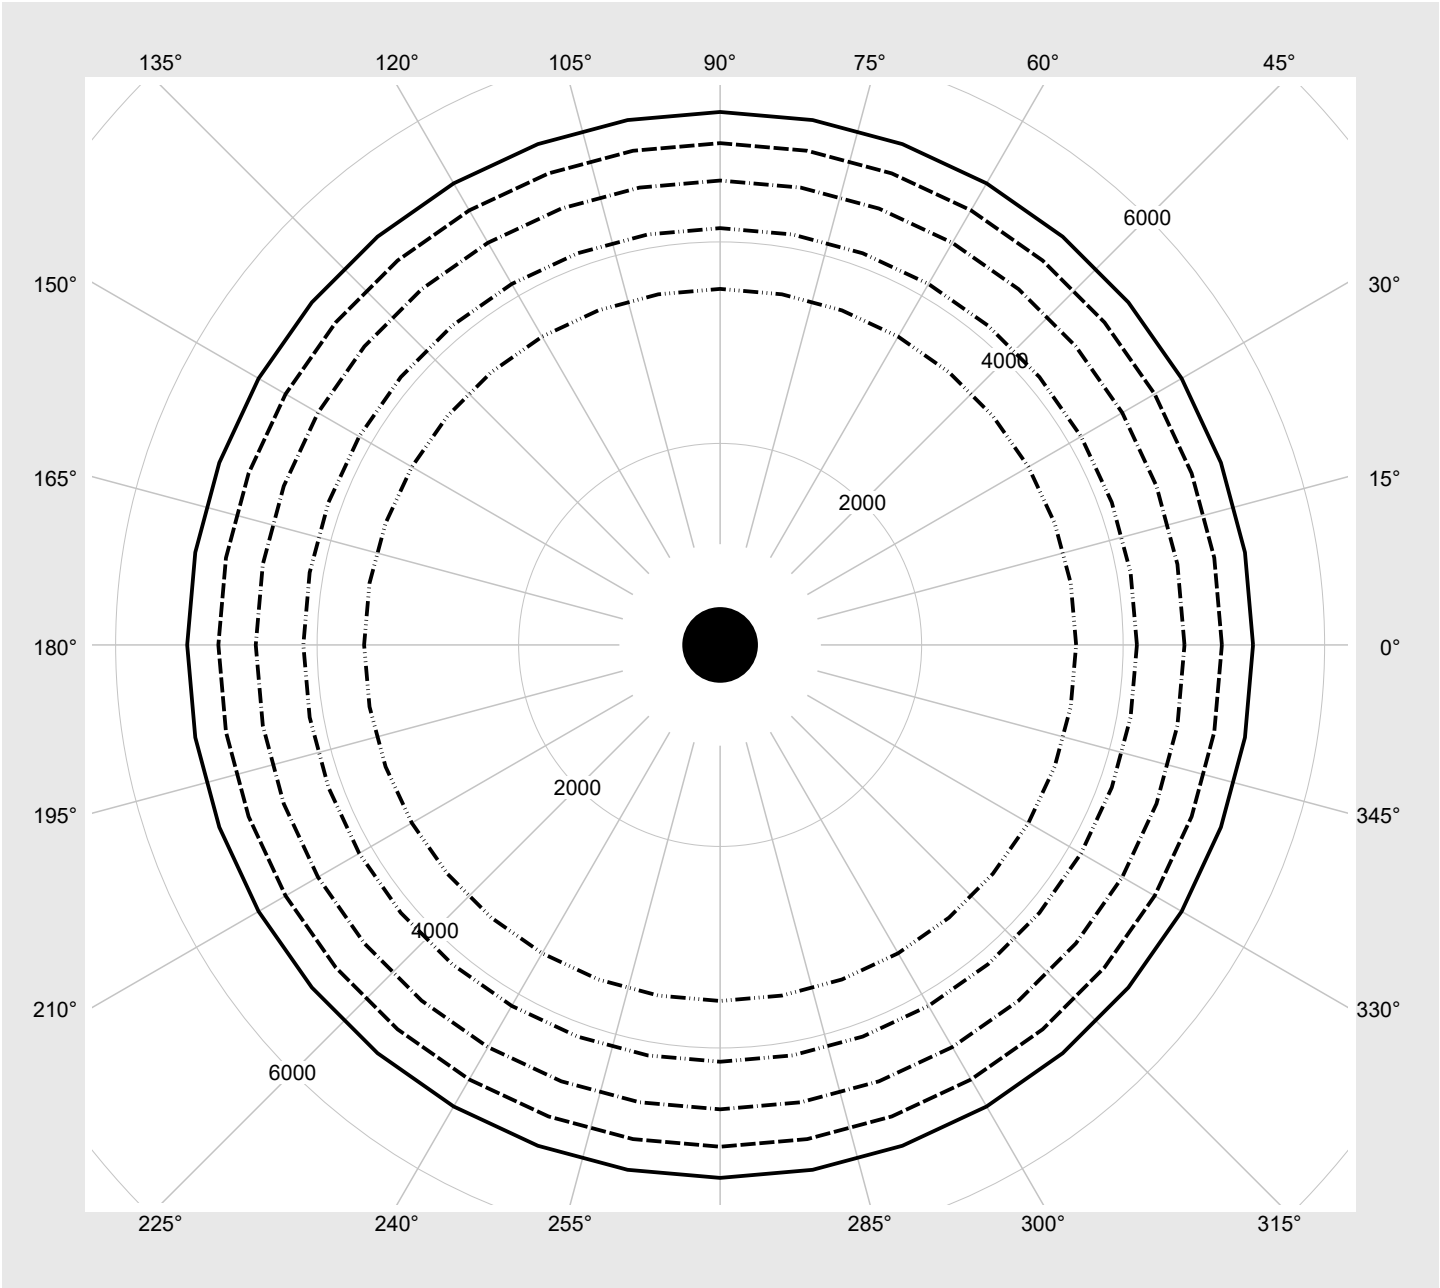

Photometric test report

Family Silica® 21 round S	Order number: 51ME21DA3NWA EAN: 4069025800169	LP number 60073_2
Dimming levels table		environmental temperature: 25°C

siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	2250	16.1
95	241	252	2135	15.3
90	228	250	2021	14.5
85	216	248	1915	13.7
80	203	246	1799	13.1
75	190	243	1684	12.3
70	178	241	1578	11.6
65	165	238	1462	10.9
60	152	235	1346	10.1
55	140	232	1239	9.4
50	127	229	1123	8.6
45	115	225	1016	7.9
40	102	221	900	7.1
35	89	216	783	6.3
30	77	210	675	5.6
25	65	204	567	4.8
20	52	196	450	4.0
15	40	186	341	3.3
10	27	172	224	2.3
5	15	150	115	1.4
4	13	145	96	1.2