

Photometric test report

Family
Silica® 21 round L

Order number: 51ME21DC4NWA
EAN: 4069025804372

LP number
60073_15

serial
documentation
20.05.2026

siteco

Version surface-mounted luminaire, housing, white, cover, opal, direct extremely wide distribution with ceiling illumination, UGR≤22

Lamps LED 4000 K | CRI ≥ 80


Controlgear ECG-DALI

Rated values Net luminous flux = 11880 lm
Power consumption = 72.7 W
Luminous efficacy = 163.4 lm/W

Luminous intensity in cd/klm

C180-0

Imax: 362 cd/klm

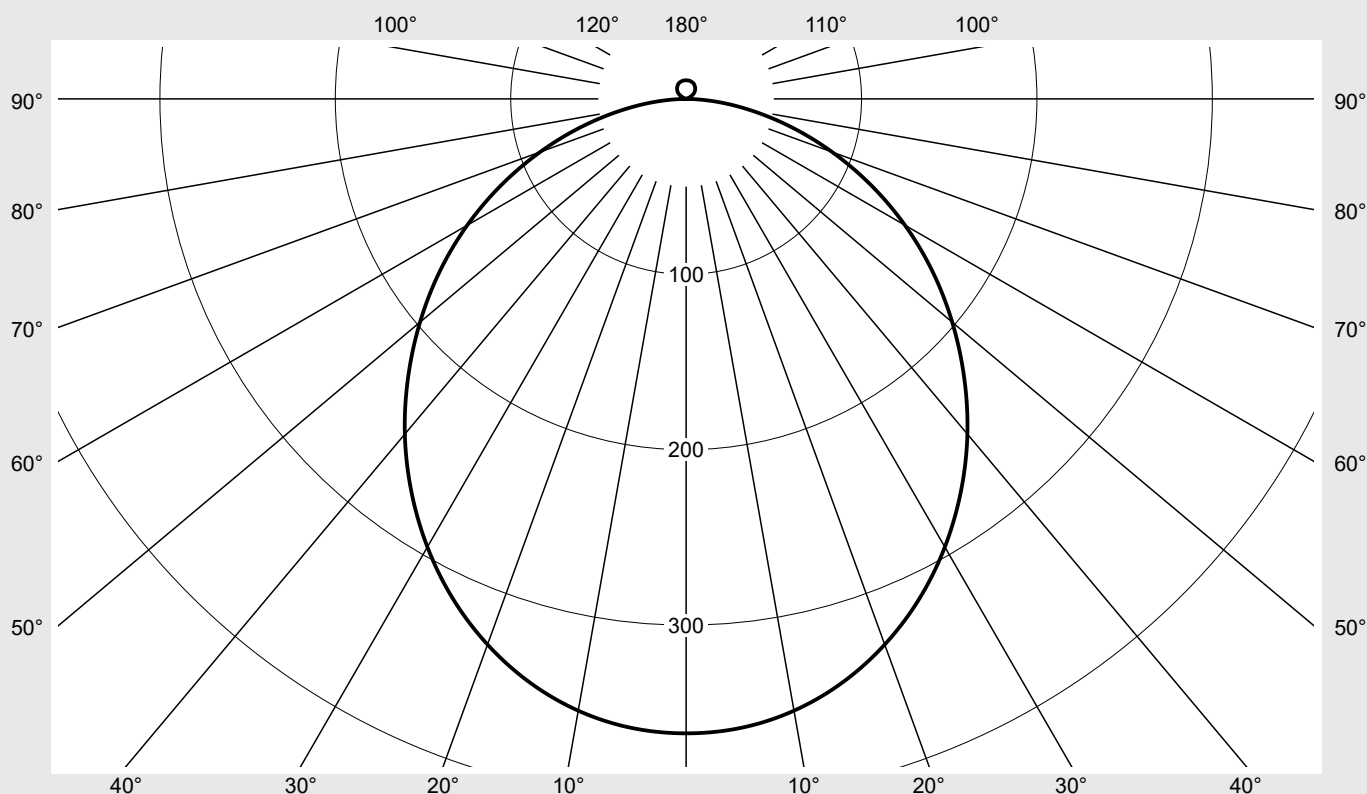

Classifications

DIN 5040 A 4 3
CIE N1=49 N2=79 N3=96
N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 97.2%
 ϕ_o 2.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round L	Order number: 51ME21DC4NWA EAN: 4069025804372	LP number 60073_15
Table of values for luminous intensities		Maximum luminous intensity

siteco

C- planes	0°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm		Luminous flux in lm/klm
0°	361.7	2.2	2.2
5°	359.9	17.2	19.4
10°	354.2	33.7	53.1
15°	344.4	48.9	101.9
20°	331.1	62.1	164.0
25°	314.5	72.9	236.9
30°	295.0	80.9	317.7
35°	273.1	85.9	403.6
40°	249.5	87.9	491.5
45°	224.1	86.9	578.4
50°	198.0	83.2	661.5
55°	171.5	77.0	738.5
60°	144.1	68.4	806.9
65°	116.3	57.8	864.7
70°	88.6	45.6	910.3
75°	62.0	32.8	943.1
80°	37.4	20.2	963.3
85°	16.0	8.7	972.1
90°	0.1	0.0	972.1
95°	0.2	0.1	972.2
100°	0.5	0.3	972.5
105°	1.0	0.5	973.0
110°	1.6	0.8	973.8
115°	2.4	1.2	975.0
120°	3.8	1.8	976.8
125°	5.3	2.4	979.2
130°	6.4	2.7	981.9
135°	7.2	2.8	984.7
140°	8.0	2.8	987.5
145°	8.7	2.7	990.2
150°	9.3	2.6	992.8
155°	9.8	2.3	995.1
160°	10.1	1.9	997.0
165°	10.3	1.5	998.4
170°	10.5	1.0	999.4
175°	10.6	0.5	999.9
180°	10.6	0.1	1000.0

Photometric test report

Family Silica® 21 round L			Order number: 51ME21DC4NWA EAN: 4069025804372							LP number 60073_15	
UGR-Table			Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		View crosswise (C0)					View endwise (C90)				
x	y										
2H	2H	18.4	20.1	18.7	20.4	20.7	18.4	20.1	18.7	20.4	20.7
	3H	20.0	21.5	20.3	21.8	22.2	20.0	21.5	20.3	21.8	22.2
	4H	20.6	22.0	21.0	22.4	22.7	20.6	22.0	21.0	22.4	22.7
	6H	21.1	22.4	21.5	22.7	23.1	21.1	22.4	21.5	22.7	23.1
	8H	21.3	22.5	21.7	22.9	23.3	21.3	22.5	21.7	22.9	23.3
	12H	21.4	22.5	21.8	22.9	23.3	21.4	22.5	21.8	22.9	23.3
4H	2H	19.1	20.6	19.5	20.9	21.3	19.1	20.6	19.5	20.9	21.3
	3H	20.9	22.1	21.3	22.5	22.9	20.9	22.1	21.3	22.5	22.9
	4H	21.6	22.7	22.1	23.1	23.6	21.6	22.7	22.1	23.1	23.6
	6H	22.2	23.2	22.7	23.6	24.1	22.2	23.2	22.7	23.6	24.1
	8H	22.4	23.3	22.9	23.8	24.2	22.4	23.3	22.9	23.8	24.2
	12H	22.6	23.4	23.1	23.8	24.3	22.6	23.4	23.1	23.8	24.3
8H	4H	22.0	22.8	22.4	23.3	23.8	22.0	22.8	22.4	23.3	23.8
	6H	22.7	23.4	23.2	23.9	24.4	22.7	23.4	23.2	23.9	24.4
	8H	23.0	23.6	23.5	24.1	24.6	23.0	23.6	23.5	24.1	24.6
	12H	23.2	23.7	23.7	24.2	24.8	23.2	23.7	23.7	24.2	24.8
12H	4H	22.0	22.8	22.5	23.3	23.7	22.0	22.8	22.5	23.3	23.7
	6H	22.8	23.4	23.3	23.9	24.4	22.8	23.4	23.3	23.9	24.4
	8H	23.1	23.6	23.6	24.1	24.7	23.1	23.6	23.6	24.1	24.7

Luminance table		Max. for $\gamma \geq 65^\circ$	Photometric dimensions in mm: D = 886
C-planes	0°		
γ	Luminance in cd/m²		
45°	6107.2		
50°	5936.7		
55°	5760.4		
60°	5553.1		
65°	5301.2		
70°	4991.2		
75°	4619.2		
80°	4145.9		
85°	3541.4		

Photometric test report

Family
Silica® 21 round L

Order number: 51ME21DC4NWA
EAN: 4069025804372

LP number
60073_15

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

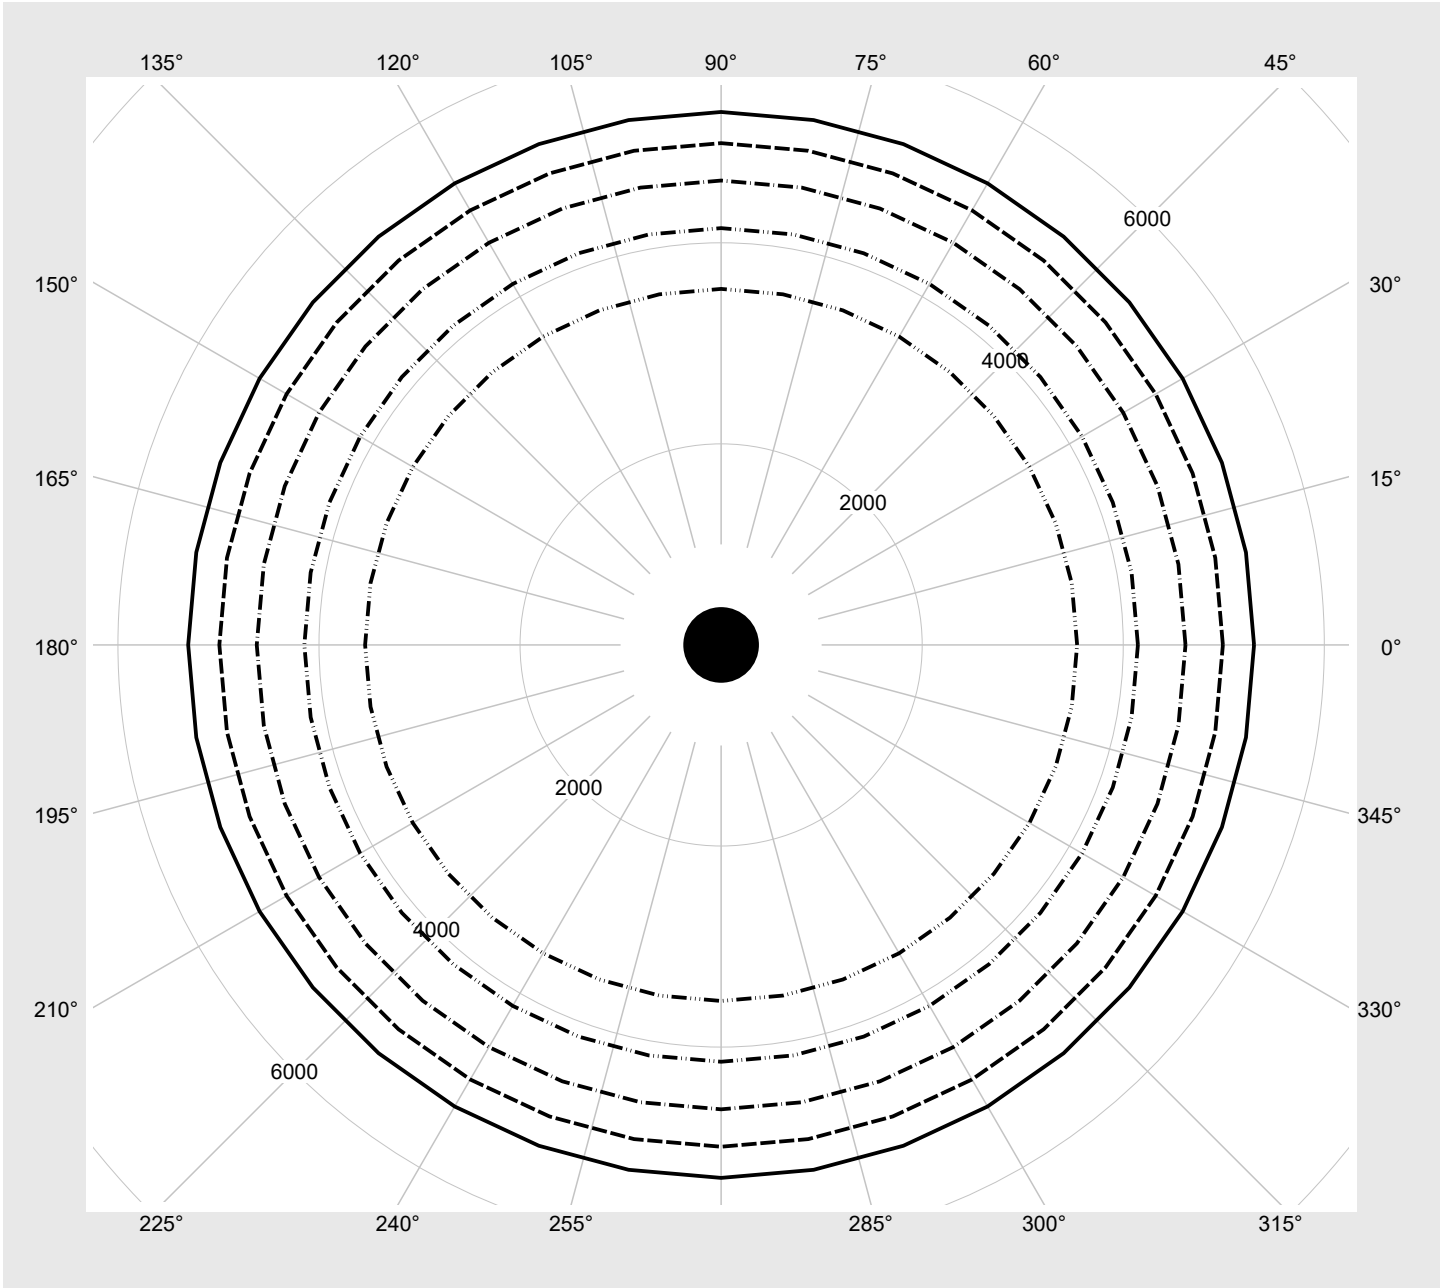

Photometric test report

Family Silica® 21 round L	Order number: 51ME21DC4NWA EAN: 4069025804372	LP number 60073_15
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	11880	72.7
95	241	252	11278	69.0
90	228	250	10675	65.3
85	216	248	10117	62.0
80	203	246	9511	58.4
75	190	243	8903	54.7
70	177	241	8294	51.1
65	165	238	7731	47.8
60	152	235	7120	44.2
55	140	232	6555	40.9
50	127	229	5942	37.3
45	114	225	5328	33.8
40	102	221	4759	30.5
35	89	216	4143	27.0
30	77	210	3571	23.7
25	64	204	2952	20.2
20	52	196	2379	17.1
15	40	186	1805	13.8
10	27	172	1183	10.4
5	15	150	607	7.2
0	3	91	30	3.6