


Photometric test report

Family Silica® 21 round S	Order number: 51ME23DA3MWA EAN: 4069025800282		LP number 60072_2
	Version	surface-mounted luminaire, housing, white, microprismatic optics, direct wide distribution with ceiling illumination, UGR≤19	
	Lamps	LED 3000 K CRI ≥ 80	
	Controlgear	ECG-DALI	
	Rated values	Net luminous flux = 2480 lm Power consumption = 17.5 W Luminous efficacy = 141.7 lm/W	
			serial documentation 20.05.2026
			siteco

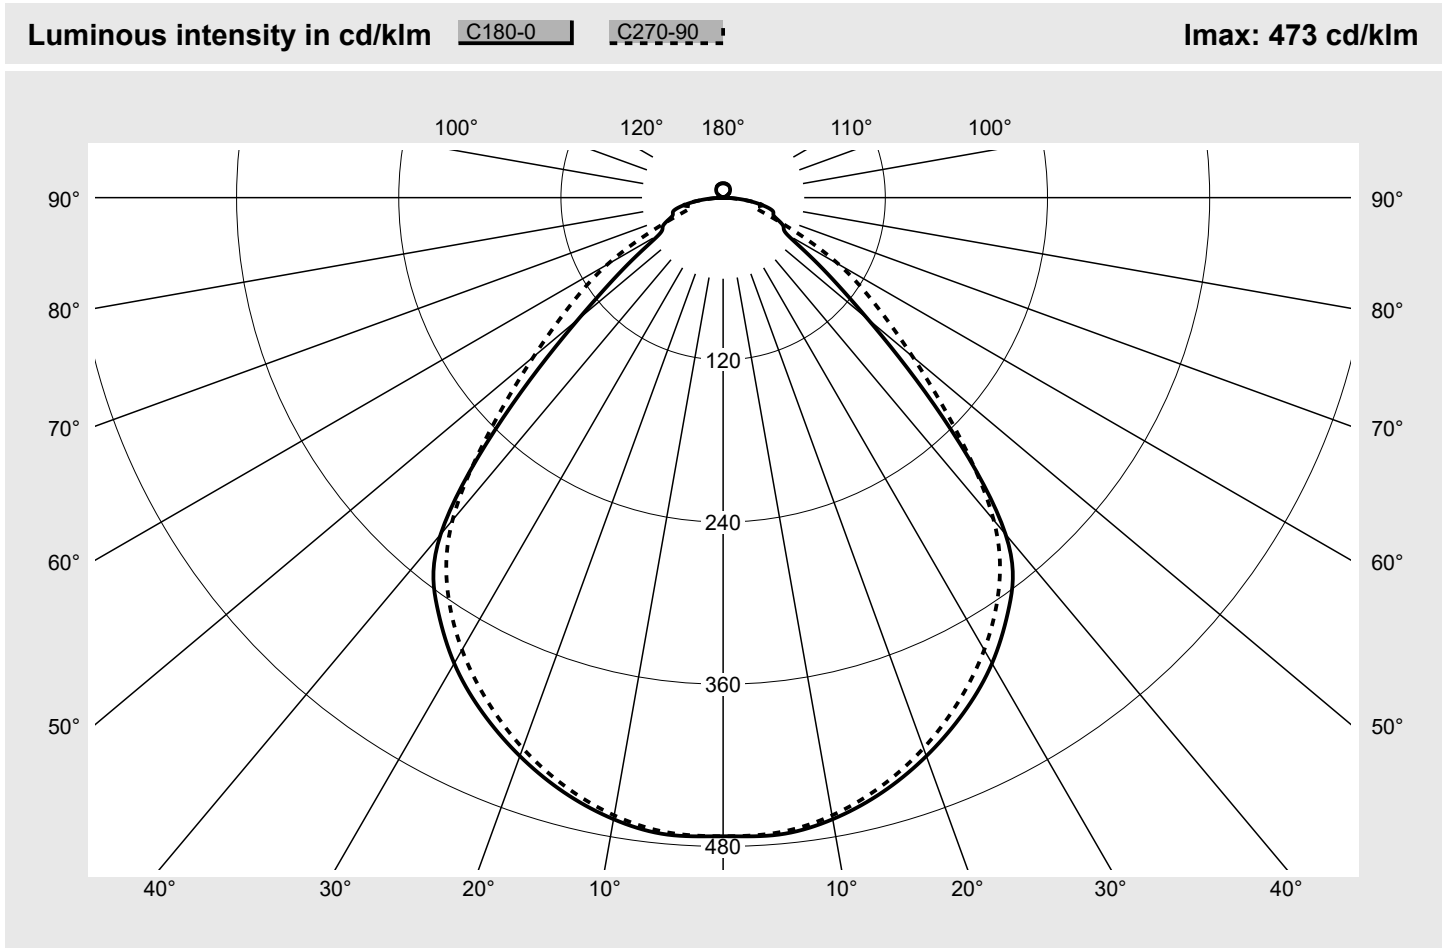

Classifications		Luminaire light output ratios	
DIN 5040	A 5 3	η_{LB}	100.0%
CIE	N1=64 N2=89 N3=97	ϕ_u	97.2%
	N4=97 N5=100	ϕ_o	2.8%

Measurement conditions
DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round S	Order number: 51ME23DA3MWA EAN: 4069025800282	LP number 60072_2
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	472.5	472.5	472.5	472.5	472.5	472.5	472.5	2.8	2.8
5°	473.1	470.6	467.9	469.6	471.8	471.5	471.4	22.5	25.3
10°	467.0	464.4	461.3	462.6	464.5	464.1	464.1	44.1	69.4
15°	455.4	452.9	449.6	450.4	451.7	451.2	451.0	64.1	133.5
20°	439.7	437.1	433.3	433.5	434.4	433.7	433.5	81.5	215.0
25°	420.7	417.7	413.1	412.9	413.8	412.5	411.7	96.0	311.0
30°	397.9	394.4	388.9	388.6	389.9	387.9	386.4	107.0	418.0
35°	369.1	365.7	359.1	359.5	360.4	358.3	355.3	113.4	531.4
40°	325.1	325.2	319.3	318.9	313.7	315.1	311.5	112.2	643.6
45°	229.9	244.7	248.2	243.4	222.2	243.0	244.1	92.9	736.5
50°	139.7	160.3	187.1	160.2	138.8	157.7	183.1	67.6	804.1
55°	86.1	98.4	139.4	97.9	85.3	95.8	137.1	47.0	851.1
60°	54.9	66.5	97.8	67.2	54.7	65.6	99.0	33.9	885.0
65°	49.0	56.8	60.6	58.2	50.2	58.3	57.3	27.9	913.0
70°	40.2	49.0	31.0	49.9	40.4	50.0	30.7	22.0	934.9
75°	38.0	34.2	27.1	34.9	38.5	34.7	24.9	17.7	952.6
80°	27.3	20.6	26.9	20.0	27.6	21.0	28.7	13.0	965.6
85°	12.7	11.9	10.0	11.9	12.7	12.2	10.1	6.4	972.0
90°	0.1	0.1	0.0	0.1	0.0	0.1	0.0	0.0	972.0
95°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	972.2
100°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.3	972.5
105°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.5	973.0
110°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.8	973.8
115°	2.4	2.4	2.5	2.5	2.5	2.5	2.5	1.2	975.0
120°	3.8	3.7	3.7	3.7	3.7	3.7	3.7	1.8	976.8
125°	5.3	5.3	5.3	5.3	5.3	5.3	5.3	2.4	979.2
130°	6.4	6.4	6.4	6.4	6.4	6.4	6.4	2.7	981.9
135°	7.2	7.2	7.3	7.3	7.3	7.3	7.3	2.8	984.7
140°	8.0	8.0	8.0	8.1	8.1	8.0	8.0	2.8	987.5
145°	8.7	8.7	8.7	8.7	8.7	8.7	8.7	2.7	990.2
150°	9.3	9.3	9.3	9.3	9.3	9.3	9.3	2.6	992.8
155°	9.8	9.8	9.8	9.8	9.8	9.8	9.8	2.3	995.1
160°	10.1	10.1	10.1	10.1	10.1	10.1	10.1	1.9	997.0
165°	10.4	10.4	10.3	10.4	10.4	10.3	10.4	1.5	998.4
170°	10.6	10.6	10.6	10.5	10.5	10.5	10.5	1.0	999.4
175°	10.6	10.6	10.6	10.6	10.6	10.6	10.6	0.5	999.9
180°	10.6	10.6	10.6	10.6	10.6	10.6	10.6	0.1	1000.0

Photometric test report

Family Silica® 21 round S		Order number: 51ME23DA3MWA EAN: 4069025800282							LP number 60072_2	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
x	y									
2H	2H	16.9	18.4	17.3	18.7	19.1	16.7	18.2	17.1	18.5
	3H	17.6	19.0	18.0	19.3	19.7	17.5	18.8	17.9	19.2
	4H	18.1	19.4	18.5	19.7	20.1	17.8	19.1	18.2	19.4
	6H	18.6	19.7	19.0	20.1	20.5	18.3	19.4	18.7	19.8
	8H	18.8	19.9	19.2	20.3	20.7	18.6	19.6	19.0	20.0
	12H	19.0	20.0	19.4	20.4	20.8	18.7	19.7	19.1	20.1
4H	2H	17.2	18.4	17.6	18.8	19.2	17.0	18.3	17.4	18.6
	3H	18.0	19.1	18.4	19.5	19.9	18.0	19.1	18.4	19.5
	4H	18.6	19.5	19.0	19.9	20.4	18.5	19.5	19.0	19.9
	6H	19.2	20.0	19.6	20.4	20.9	19.1	19.9	19.6	20.4
	8H	19.4	20.2	19.9	20.6	21.1	19.4	20.2	19.9	20.6
	12H	19.7	20.3	20.2	20.8	21.3	19.6	20.3	20.1	20.7
8H	4H	18.8	19.6	19.3	20.0	20.5	18.8	19.6	19.3	20.0
	6H	19.6	20.2	20.1	20.7	21.2	19.6	20.2	20.1	20.7
	8H	20.0	20.5	20.5	21.0	21.5	20.0	20.5	20.5	21.0
	12H	20.3	20.7	20.8	21.2	21.8	20.3	20.7	20.8	21.2
12H	4H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0
	6H	19.7	20.2	20.2	20.7	21.2	19.7	20.2	20.2	20.7
	8H	20.1	20.5	20.6	21.0	21.6	20.1	20.6	20.6	21.1

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 386	
C-planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
γ	Luminance in cd/m²						
45°	6890.4	7333.6	7439.4	7296.4	6658.9	7282.2	7316.4
50°	4605.8	5283.9	6169.3	5280.8	4575.3	5200.1	6035.7
55°	3181.4	3634.5	5150.5	3618.7	3152.1	3540.1	5065.0
60°	2325.0	2816.8	4147.3	2847.8	2317.9	2779.9	4196.2
65°	2455.0	2849.9	3036.5	2920.0	2516.3	2921.2	2872.6
70°	2490.3	3035.9	1923.2	3092.7	2504.3	3098.6	1899.8
75°	3110.5	2798.3	2221.1	2859.3	3155.3	2837.9	2036.4
80°	3327.4	2519.5	3288.0	2446.7	3365.9	2567.8	3507.9
85°	3094.4	2893.6	2442.8	2903.1	3077.2	2964.6	2456.4

Photometric test report

Family
Silica® 21 round S

Order number: 51ME23DA3MWA
EAN: 4069025800282

LP number
60072_2

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

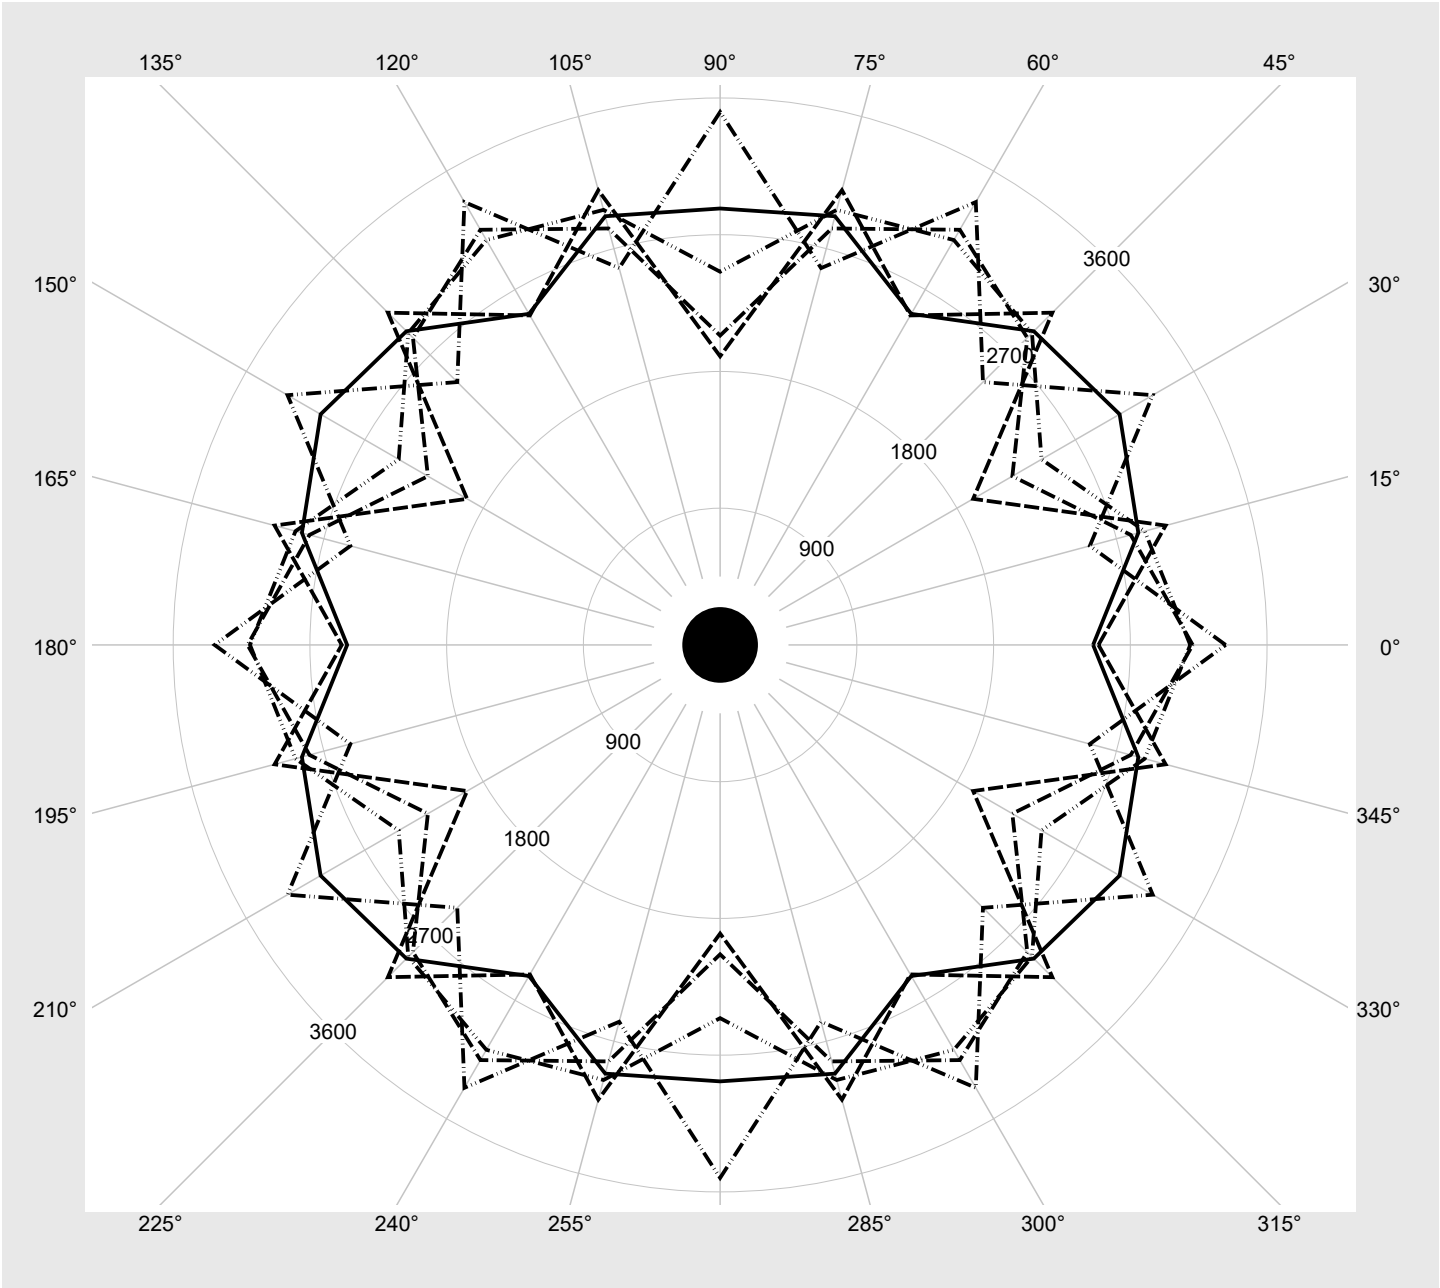

Photometric test report

Family Silica® 21 round S	Order number: 51ME23DA3MWA EAN: 4069025800282	LP number 60072_2
Dimming levels table		environmental temperature: 25°C



Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	2480	17.5
95	241	252	2354	16.6
90	228	250	2228	15.8
85	216	248	2112	14.9
80	203	246	1985	14.0
75	190	243	1858	13.2
70	178	241	1741	12.5
65	165	238	1613	11.6
60	152	235	1486	10.9
55	140	232	1368	10.1
50	127	229	1240	9.2
45	114	225	1112	8.4
40	102	221	994	7.6
35	89	216	865	6.8
30	77	210	746	6.0
25	64	204	617	5.1
20	52	196	498	4.3
15	39	185	368	3.4
10	27	172	249	2.5
5	15	150	128	1.5
4	12	142	98	1.2