

Photometric test report

Family
Silica® 21 round M

Order number: 51ME23DB4MBA
EAN: 4069025802736

LP number
60072_27

serial
documentation
20.05.2026



Version surface-mounted luminaire, housing, black, microprismatic optics, direct wide distribution with ceiling illumination, UGR≤19

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI

Rated values Net luminous flux = 5720 lm
Power consumption = 37.2 W
Luminous efficacy = 153.8 lm/W


siteco

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 473 cd/klm

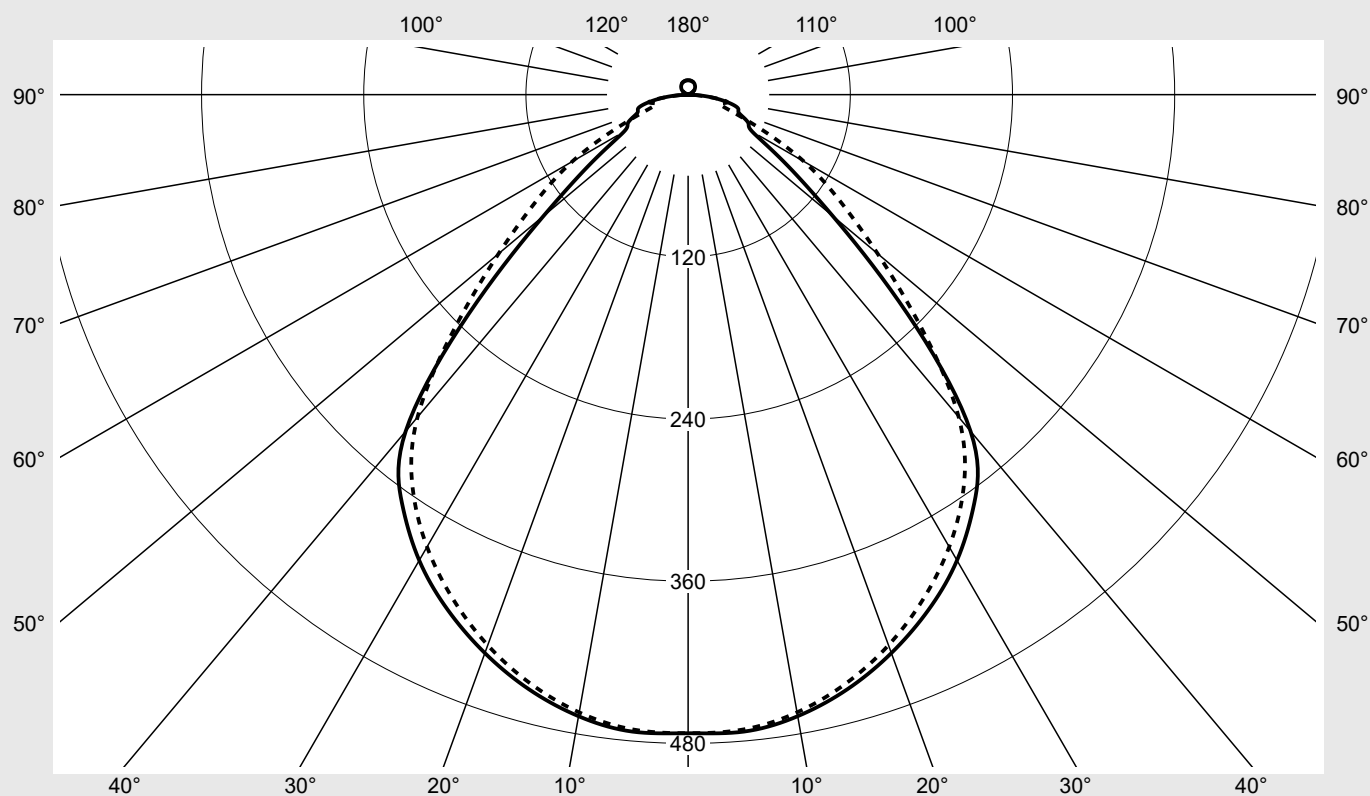

Classifications

DIN 5040 A 5 3
CIE N1=64 N2=89 N3=97
N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 97.2%
 ϕ_o 2.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51ME23DB4MBA EAN: 4069025802736	LP number 60072_27
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	472.5	472.5	472.5	472.5	472.5	472.5	472.5	2.8	2.8
5°	473.1	470.6	467.9	469.6	471.8	471.5	471.4	22.5	25.3
10°	467.0	464.4	461.3	462.6	464.5	464.1	464.1	44.1	69.4
15°	455.4	452.9	449.6	450.4	451.7	451.2	451.0	64.1	133.5
20°	439.7	437.1	433.3	433.5	434.4	433.7	433.5	81.5	215.0
25°	420.7	417.7	413.1	412.9	413.8	412.5	411.7	96.0	311.0
30°	397.9	394.4	388.9	388.6	389.9	387.9	386.4	107.0	418.0
35°	369.1	365.7	359.1	359.5	360.4	358.3	355.3	113.4	531.4
40°	325.1	325.2	319.3	318.9	313.7	315.1	311.5	112.2	643.6
45°	229.9	244.7	248.2	243.4	222.2	243.0	244.1	92.9	736.5
50°	139.7	160.3	187.1	160.2	138.8	157.7	183.1	67.6	804.1
55°	86.1	98.4	139.4	97.9	85.3	95.8	137.1	47.0	851.1
60°	54.9	66.5	97.8	67.2	54.7	65.6	99.0	33.9	885.0
65°	49.0	56.8	60.6	58.2	50.2	58.3	57.3	27.9	913.0
70°	40.2	49.0	31.0	49.9	40.4	50.0	30.7	22.0	934.9
75°	38.0	34.2	27.1	34.9	38.5	34.7	24.9	17.7	952.6
80°	27.3	20.6	26.9	20.0	27.6	21.0	28.7	13.0	965.6
85°	12.7	11.9	10.0	11.9	12.7	12.2	10.1	6.4	972.0
90°	0.1	0.1	0.0	0.1	0.0	0.1	0.0	0.0	972.0
95°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	972.2
100°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.3	972.5
105°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.5	973.0
110°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.8	973.8
115°	2.4	2.4	2.5	2.5	2.5	2.5	2.5	1.2	975.0
120°	3.8	3.7	3.7	3.7	3.7	3.7	3.7	1.8	976.8
125°	5.3	5.3	5.3	5.3	5.3	5.3	5.3	2.4	979.2
130°	6.4	6.4	6.4	6.4	6.4	6.4	6.4	2.7	981.9
135°	7.2	7.2	7.3	7.3	7.3	7.3	7.3	2.8	984.7
140°	8.0	8.0	8.0	8.1	8.1	8.0	8.0	2.8	987.5
145°	8.7	8.7	8.7	8.7	8.7	8.7	8.7	2.7	990.2
150°	9.3	9.3	9.3	9.3	9.3	9.3	9.3	2.6	992.8
155°	9.8	9.8	9.8	9.8	9.8	9.8	9.8	2.3	995.1
160°	10.1	10.1	10.1	10.1	10.1	10.1	10.1	1.9	997.0
165°	10.4	10.4	10.3	10.4	10.4	10.3	10.4	1.5	998.4
170°	10.6	10.6	10.6	10.5	10.5	10.5	10.5	1.0	999.4
175°	10.6	10.6	10.6	10.6	10.6	10.6	10.6	0.5	999.9
180°	10.6	10.6	10.6	10.6	10.6	10.6	10.6	0.1	1000.0

Photometric test report

Family Silica® 21 round M		Order number: 51ME23DB4MBA EAN: 4069025802736							LP number 60072_27	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
x	y									
2H	2H	16.9	18.4	17.3	18.7	19.1	16.7	18.2	17.1	18.5
	3H	17.6	19.0	18.0	19.3	19.7	17.5	18.8	17.9	19.2
	4H	18.1	19.4	18.5	19.7	20.1	17.8	19.1	18.2	19.4
	6H	18.6	19.7	19.0	20.1	20.5	18.3	19.4	18.7	19.8
	8H	18.8	19.9	19.2	20.3	20.7	18.6	19.6	19.0	20.0
	12H	19.0	20.0	19.4	20.4	20.8	18.7	19.7	19.1	20.1
4H	2H	17.2	18.4	17.6	18.8	19.2	17.0	18.3	17.4	18.6
	3H	18.0	19.1	18.4	19.5	19.9	18.0	19.1	18.4	19.5
	4H	18.6	19.5	19.0	19.9	20.4	18.5	19.5	19.0	19.9
	6H	19.2	20.0	19.6	20.4	20.9	19.1	20.0	19.6	20.4
	8H	19.4	20.2	19.9	20.6	21.1	19.4	20.2	19.9	20.6
	12H	19.7	20.3	20.2	20.8	21.3	19.6	20.3	20.1	20.7
8H	4H	18.8	19.6	19.3	20.0	20.5	18.8	19.6	19.3	20.0
	6H	19.6	20.2	20.1	20.7	21.2	19.6	20.2	20.1	20.7
	8H	20.0	20.5	20.5	21.0	21.5	20.0	20.5	20.5	21.0
	12H	20.3	20.7	20.8	21.2	21.8	20.3	20.7	20.8	21.2
12H	4H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0
	6H	19.7	20.2	20.2	20.7	21.2	19.7	20.2	20.2	20.7
	8H	20.1	20.5	20.6	21.0	21.6	20.1	20.6	20.6	21.1

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 586	
C-planes		15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
	γ	Luminance in cd/m²					
45°		6895.6	7339.1	7445.0	7301.9	6663.8	7321.9
50°		4609.3	5287.9	6173.9	5284.7	4578.7	6040.2
55°		3183.7	3637.2	5154.3	3621.4	3154.5	5068.8
60°		2326.7	2818.9	4150.4	2849.9	2319.6	4199.3
65°		2456.8	2852.0	3038.8	2922.2	2518.2	2874.8
70°		2492.2	3038.2	1924.6	3095.0	2506.1	1901.2
75°		3112.8	2800.4	2222.8	2861.5	3157.7	2037.9
80°		3329.9	2521.4	3290.4	2448.6	3368.4	3510.5
85°		3096.8	2895.8	2444.6	2905.2	3079.5	2458.2

Photometric test report

Family
Silica® 21 round M

Order number: 51ME23DB4MBA
EAN: 4069025802736

LP number
60072_27

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

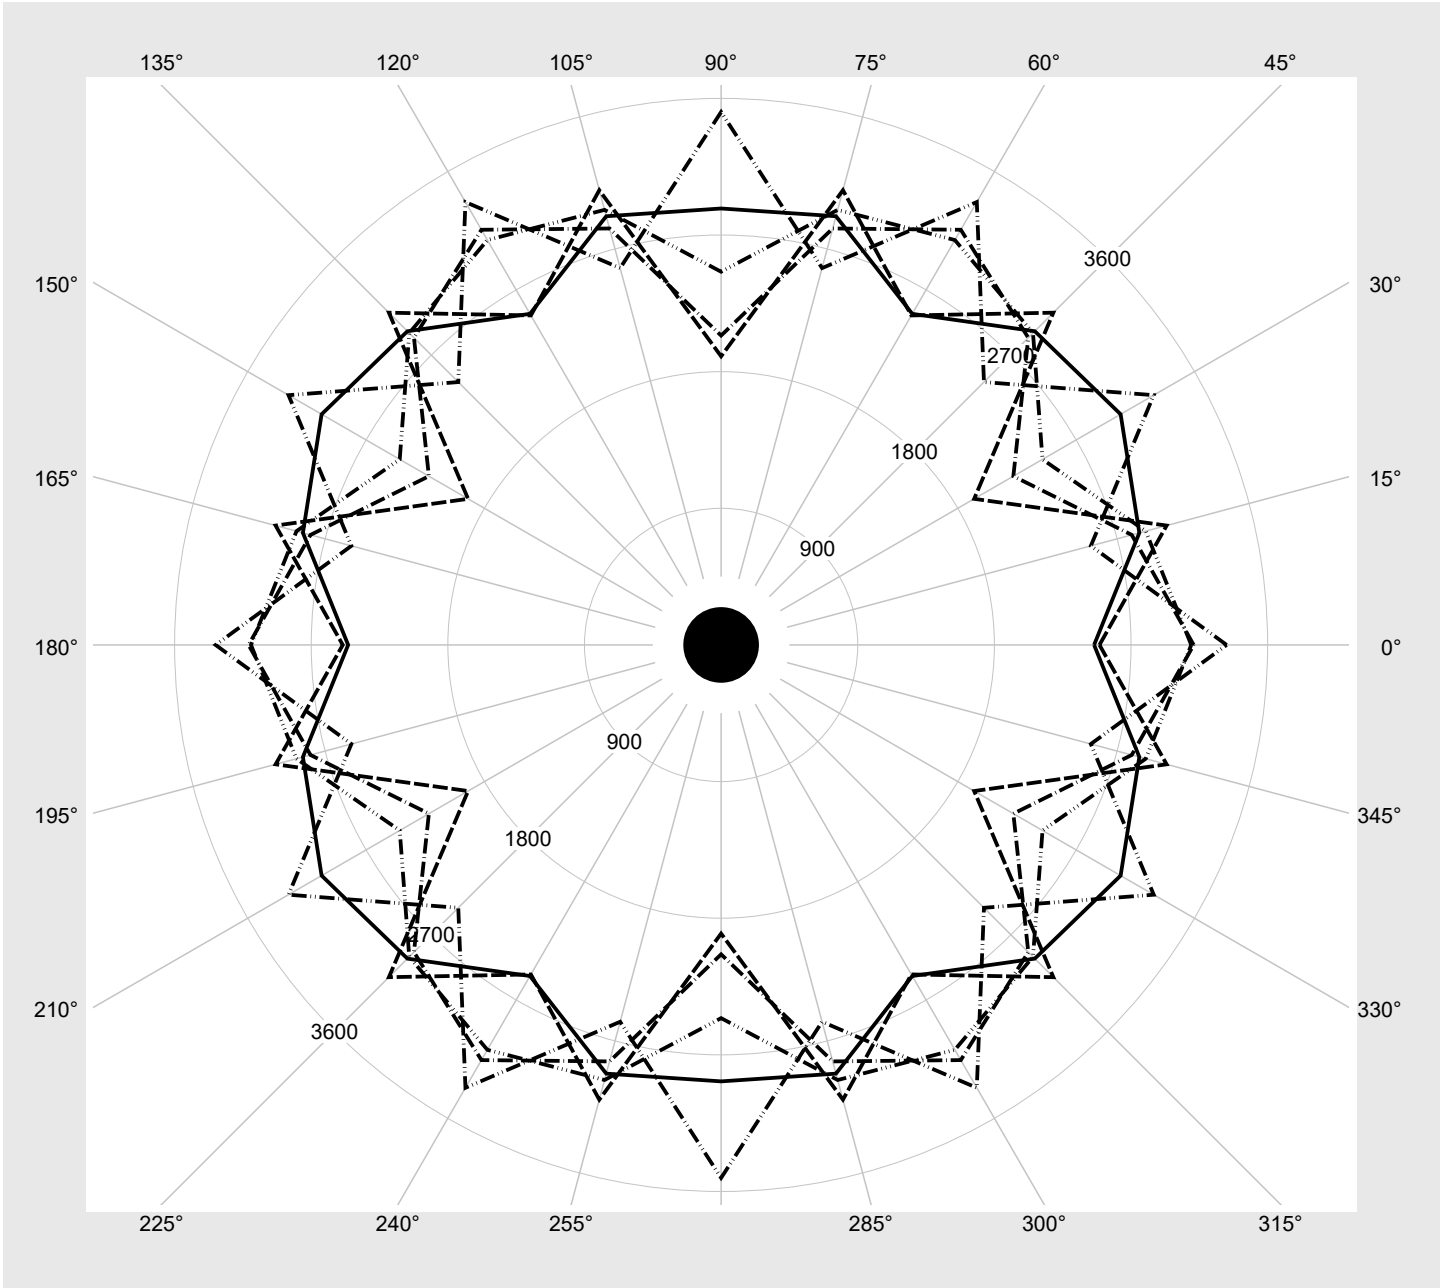

Photometric test report

Family Silica® 21 round M	Order number: 51ME23DB4MBA EAN: 4069025802736	LP number 60072_27
Dimming levels table environmental temperature: 25°C		

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5720	37.2
95	241	252	5430	35.5
90	228	250	5139	33.5
85	216	248	4870	31.8
80	203	246	4579	29.9
75	190	243	4287	28.1
70	177	241	3994	26.3
65	165	238	3724	24.6
60	152	235	3430	22.7
55	140	232	3157	21.1
50	127	229	2862	19.3
45	114	225	2566	17.4
40	102	221	2292	15.8
35	89	216	1995	14.1
30	77	210	1720	12.5
25	64	204	1423	10.8
20	52	196	1147	9.1
15	39	185	849	7.1
10	27	172	572	5.2
5	15	150	296	3.6
2	6	117	88	2.2