

Photometric test report

Family
Silica® 21 round M

Order number: 51ME23DB4MWA
EAN: 4069025802774

LP number
60072_9

serial
documentation
20.05.2026

siteco

Version surface-mounted luminaire, housing, white, microprismatic optics, direct wide distribution with ceiling illumination, UGR≤19

Lamps LED 4000 K | CRI ≥ 80

Controlgear ECG-DALI


Rated values Net luminous flux = 5720 lm
Power consumption = 35.7 W
Luminous efficacy = 160.2 lm/W

Luminous intensity in cd/klm

C180-0

C270-90

Imax: 473 cd/klm

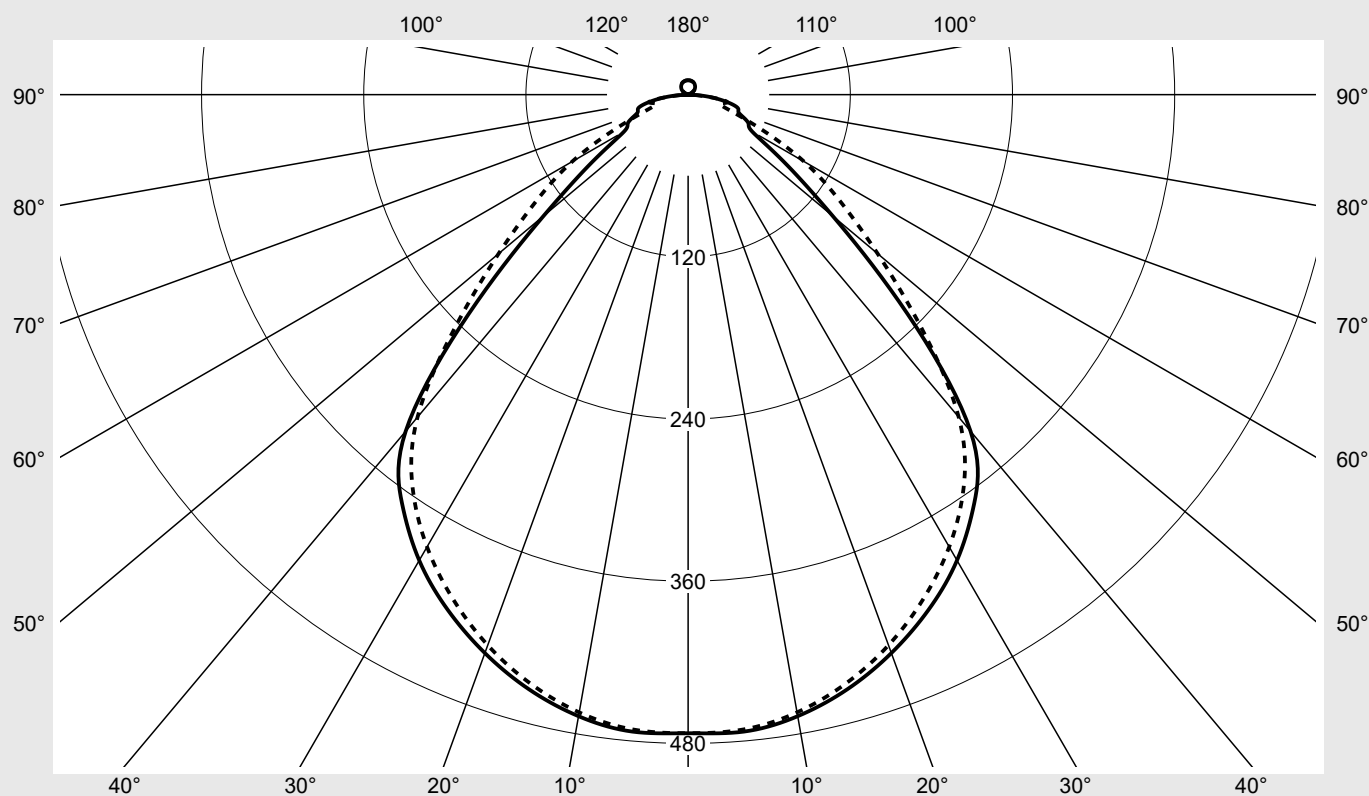

Classifications

DIN 5040 A 5 3
CIE N1=64 N2=89 N3=97
N4=97 N5=100

Luminaire light output ratios

η_{LB} 100.0%
 ϕ_u 97.2%
 ϕ_o 2.8%

Measurement conditions

DIN EN 13032 and DIN 5032

Photometric test report

Family Silica® 21 round M	Order number: 51ME23DB4MWA EAN: 4069025802774	LP number 60072_9
Table of values for luminous intensities		Maximum luminous intensity
		siteco

C- planes	0° 180°	15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°	Phi-zone	Total Phi-zone
γ	Luminous intensity in cd/klm							Luminous flux in lm/klm	
0°	472.5	472.5	472.5	472.5	472.5	472.5	472.5	2.8	2.8
5°	473.1	470.6	467.9	469.6	471.8	471.5	471.4	22.5	25.3
10°	467.0	464.4	461.3	462.6	464.5	464.1	464.1	44.1	69.4
15°	455.4	452.9	449.6	450.4	451.7	451.2	451.0	64.1	133.5
20°	439.7	437.1	433.3	433.5	434.4	433.7	433.5	81.5	215.0
25°	420.7	417.7	413.1	412.9	413.8	412.5	411.7	96.0	311.0
30°	397.9	394.4	388.9	388.6	389.9	387.9	386.4	107.0	418.0
35°	369.1	365.7	359.1	359.5	360.4	358.3	355.3	113.4	531.4
40°	325.1	325.2	319.3	318.9	313.7	315.1	311.5	112.2	643.6
45°	229.9	244.7	248.2	243.4	222.2	243.0	244.1	92.9	736.5
50°	139.7	160.3	187.1	160.2	138.8	157.7	183.1	67.6	804.1
55°	86.1	98.4	139.4	97.9	85.3	95.8	137.1	47.0	851.1
60°	54.9	66.5	97.8	67.2	54.7	65.6	99.0	33.9	885.0
65°	49.0	56.8	60.6	58.2	50.2	58.3	57.3	27.9	913.0
70°	40.2	49.0	31.0	49.9	40.4	50.0	30.7	22.0	934.9
75°	38.0	34.2	27.1	34.9	38.5	34.7	24.9	17.7	952.6
80°	27.3	20.6	26.9	20.0	27.6	21.0	28.7	13.0	965.6
85°	12.7	11.9	10.0	11.9	12.7	12.2	10.1	6.4	972.0
90°	0.1	0.1	0.0	0.1	0.0	0.1	0.0	0.0	972.0
95°	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.1	972.2
100°	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.3	972.5
105°	1.0	1.0	1.0	1.0	1.0	1.0	1.0	0.5	973.0
110°	1.6	1.6	1.6	1.6	1.6	1.6	1.6	0.8	973.8
115°	2.4	2.4	2.5	2.5	2.5	2.5	2.5	1.2	975.0
120°	3.8	3.7	3.7	3.7	3.7	3.7	3.7	1.8	976.8
125°	5.3	5.3	5.3	5.3	5.3	5.3	5.3	2.4	979.2
130°	6.4	6.4	6.4	6.4	6.4	6.4	6.4	2.7	981.9
135°	7.2	7.2	7.3	7.3	7.3	7.3	7.3	2.8	984.7
140°	8.0	8.0	8.0	8.1	8.1	8.0	8.0	2.8	987.5
145°	8.7	8.7	8.7	8.7	8.7	8.7	8.7	2.7	990.2
150°	9.3	9.3	9.3	9.3	9.3	9.3	9.3	2.6	992.8
155°	9.8	9.8	9.8	9.8	9.8	9.8	9.8	2.3	995.1
160°	10.1	10.1	10.1	10.1	10.1	10.1	10.1	1.9	997.0
165°	10.4	10.4	10.3	10.4	10.4	10.3	10.4	1.5	998.4
170°	10.6	10.6	10.6	10.5	10.5	10.5	10.5	1.0	999.4
175°	10.6	10.6	10.6	10.6	10.6	10.6	10.6	0.5	999.9
180°	10.6	10.6	10.6	10.6	10.6	10.6	10.6	0.1	1000.0

Photometric test report

Family Silica® 21 round M		Order number: 51ME23DB4MWA EAN: 4069025802774							LP number 60072_9	
UGR-Table		Standard room							siteco	
Reflection factor of ceiling	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Reflection factor of walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reflection factor of floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		View crosswise (C0)					View endwise (C90)			
x	y									
2H	2H	16.9	18.4	17.3	18.7	19.1	16.7	18.2	17.1	18.5
	3H	17.6	19.0	18.0	19.3	19.7	17.5	18.8	17.9	19.2
	4H	18.1	19.4	18.5	19.7	20.1	17.8	19.1	18.2	19.4
	6H	18.6	19.7	19.0	20.1	20.5	18.3	19.4	18.7	19.8
	8H	18.8	19.9	19.2	20.3	20.7	18.6	19.6	19.0	20.0
	12H	19.0	20.0	19.4	20.4	20.8	18.7	19.7	19.1	20.1
4H	2H	17.2	18.4	17.6	18.8	19.2	17.0	18.3	17.4	18.6
	3H	18.0	19.1	18.4	19.5	19.9	18.0	19.1	18.4	19.5
	4H	18.6	19.5	19.0	19.9	20.4	18.5	19.5	19.0	19.9
	6H	19.2	20.0	19.6	20.4	20.9	19.1	20.0	19.6	20.4
	8H	19.4	20.2	19.9	20.6	21.1	19.4	20.2	19.9	20.6
	12H	19.7	20.3	20.2	20.8	21.3	19.6	20.3	20.1	20.7
8H	4H	18.8	19.6	19.3	20.0	20.5	18.8	19.6	19.3	20.0
	6H	19.6	20.2	20.1	20.7	21.2	19.6	20.2	20.1	20.7
	8H	20.0	20.5	20.5	21.0	21.5	20.0	20.5	20.5	21.0
	12H	20.3	20.7	20.8	21.2	21.8	20.3	20.7	20.8	21.2
12H	4H	18.9	19.5	19.4	20.0	20.5	18.9	19.5	19.4	20.0
	6H	19.7	20.2	20.2	20.7	21.2	19.7	20.2	20.2	20.7
	8H	20.1	20.5	20.6	21.0	21.6	20.1	20.6	20.6	21.1

Luminance table		Max. for $\gamma \geq 65^\circ$		Photometric dimensions in mm:		D = 586	
C-planes		15° 165° 195° 345°	30° 150° 210° 330°	45° 135° 225° 315°	60° 120° 240° 300°	75° 105° 255° 285°	90° 270°
	γ	0° 180°	Luminance in cd/m²				
45°		6895.6	7339.1	7445.0	7301.9	6663.8	7287.6
50°		4609.3	5287.9	6173.9	5284.7	4578.7	5204.0
55°		3183.7	3637.2	5154.3	3621.4	3154.5	3542.7
60°		2326.7	2818.9	4150.4	2849.9	2319.6	2781.9
65°		2456.8	2852.0	3038.8	2922.2	2518.2	2923.4
70°		2492.2	3038.2	1924.6	3095.0	2506.1	3100.9
75°		3112.8	2800.4	2222.8	2861.5	3157.7	2840.0
80°		3329.9	2521.4	3290.4	2448.6	3368.4	2569.7
85°		3096.8	2895.8	2444.6	2905.2	3079.5	2966.8

Photometric test report

Family
Silica® 21 round M

Order number: 51ME23DB4MWA
EAN: 4069025802774

LP number
60072_9

Luminance values in cd/m²

γ 65°


γ 70°

γ 75°

γ 80°

γ 85°

siteco

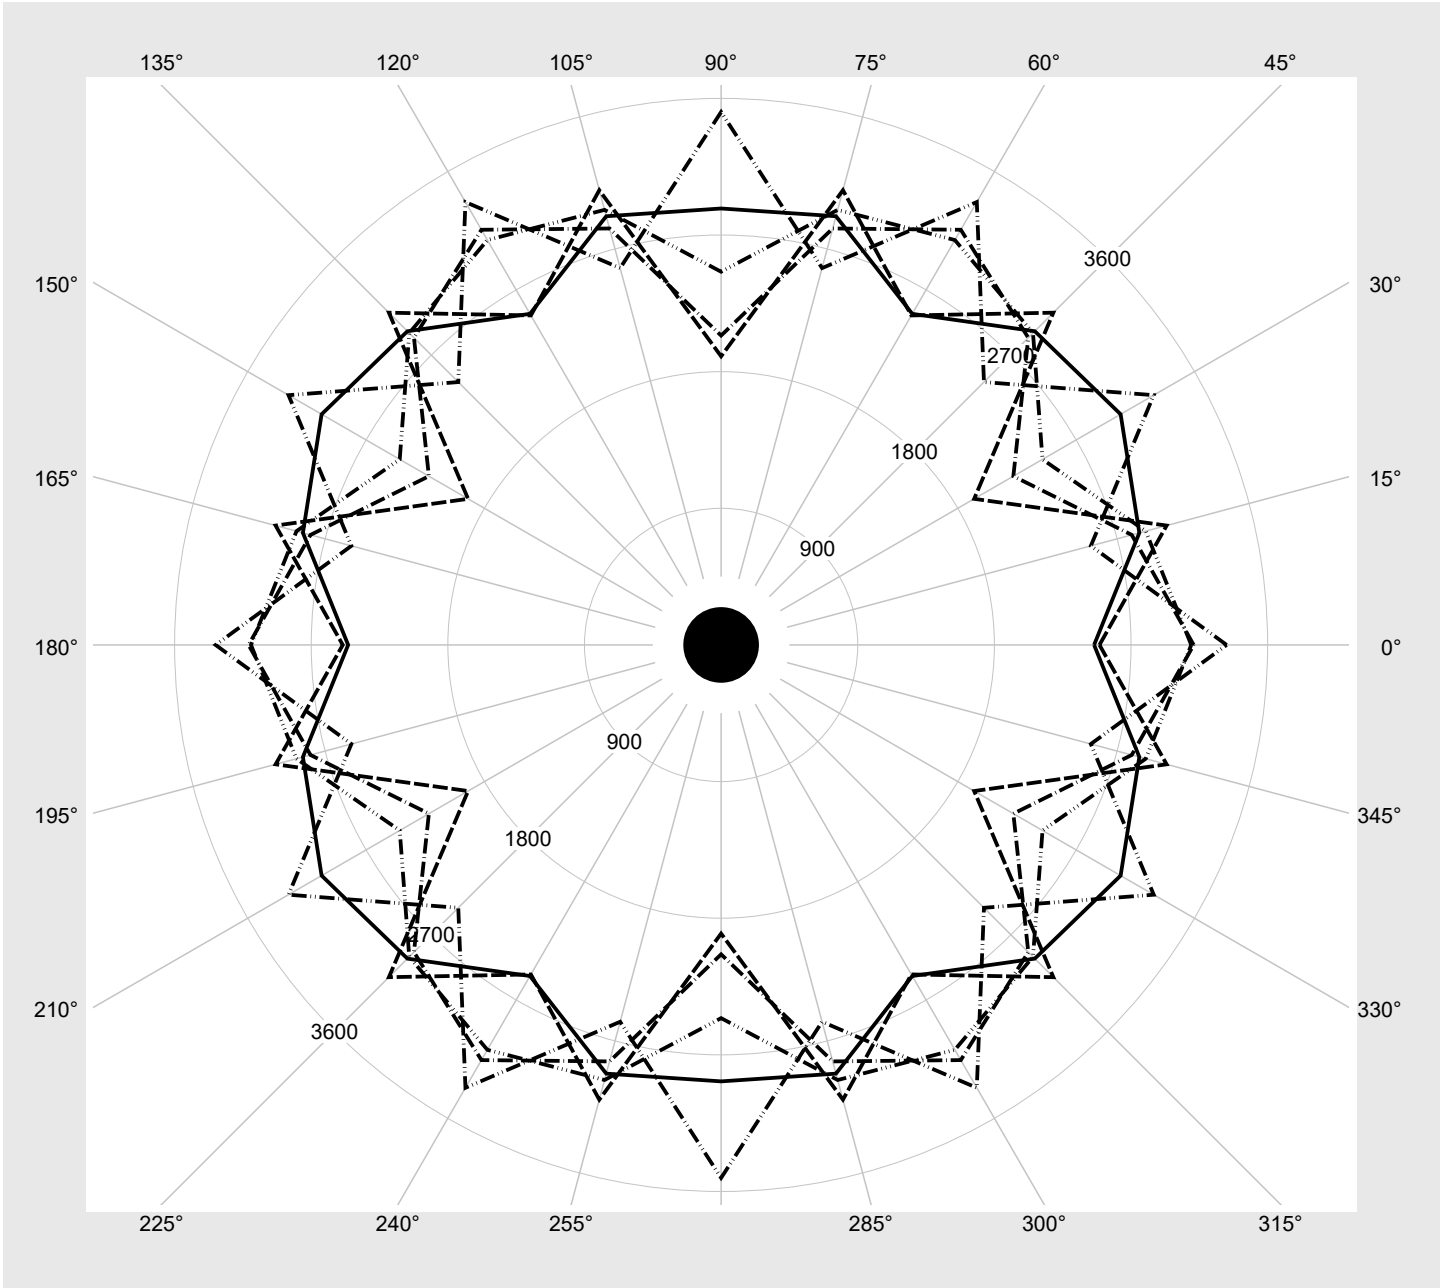

Photometric test report

Family Silica® 21 round M	Order number: 51ME23DB4MWA EAN: 4069025802774	LP number 60072_9
Dimming levels table		environmental temperature: 25°C
		siteco

Luminous flux [%]	Dimming level linear	Dimming level logarithmic	Luminous flux [lm]	Power consumption [W]
100	254	254	5720	35.7
95	241	252	5429	33.9
90	228	250	5138	32.1
85	216	248	4870	30.4
80	203	246	4578	28.7
75	190	243	4286	27.0
70	178	241	4015	25.3
65	165	238	3721	23.6
60	152	235	3427	21.9
55	140	232	3155	20.3
50	127	229	2860	18.5
45	114	225	2563	16.7
40	102	221	2289	15.2
35	89	216	1992	13.6
30	77	210	1718	12.1
25	64	204	1420	10.4
20	52	196	1144	8.8
15	40	186	869	7.0
10	27	172	570	5.0
5	15	150	293	3.5
1	6	117	85	2.2